

Side vertical outlet, twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Stainless steel shaft and motor case. Cast iron lower motor bearing/seal housing, motor top cover and volute. Complete with 10 metres of power cable. Hose tails are supplied only with models JST-4 up to JST-22 and JST-15H up to JST-55H. Suitable for water features, drainage applications, clean and dirty water. H Versions have higher head capabilities. All models can be made to work automatically, see pages 74-78 for control panels and 82-87 for float switches.

### Features

- Cast Iron
- Cast Iron Impeller
- Max Solids JST4-15(H) 6mm  
JST22(H)-75(H) 10mm

### Applications

- Heavy Duty
- Clean Water
- Dirty Water
- Drainage




JST 8 2"



JST 55


MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE	PRICE
JST-4	400v	2"	230/11.5	0.4	1.1	370 x 145 x 220	10	011-004	
JST-8	400v	2"	350/14.5	0.8	1.8	420 x 190 x 260	25	011-008 2"	
JST-8	400v	3"	350/14.5	0.8	1.8	420 x 190 x 280	25	011-008 3"	
JST-15	400v	3"	565/18	1.5	3.2	440 x 190 x 280	27	011-015	
JST-22	400v	3"	865/20	2.2	4.6	510 x 220 x 315	39	011-022	
JST-37	400v	4"	1375/24	3.7	7.9	525 x 220 x 320	45	011-037	
JST-55	400v	4"	1945/27	5.5	11.5	640 x 280 x 500	90	011-055	
JST-75	400v	6"	1970/33	7.5	15.2	720 x 280 x 500	95	011-075	
JST-15H	400v	2"	435/22	1.5	3.2	440 x 190 x 280	27	011-019	
JST-22H	400v	2"	745/25	2.2	4.6	510 x 220 x 315	39	011-023	
JST-37H	400v	2"	805/32	3.7	7.9	525 x 220 x 320	45	011-039	
JST-55H	400v	3"	1320/35	5.5	11.5	640 x 280 x 500	90	011-057	
JST-75H	400v	4"	1290/44.5	7.5	15.2	720 x 280 x 500	95	011-077	

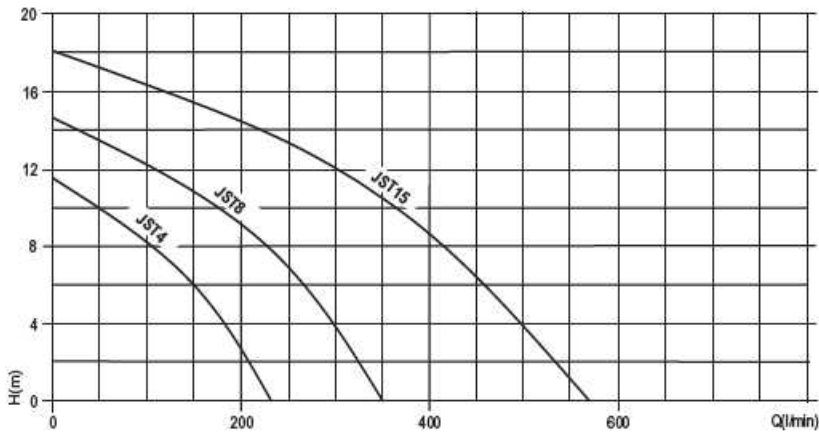

JST 8 2"



JST 15

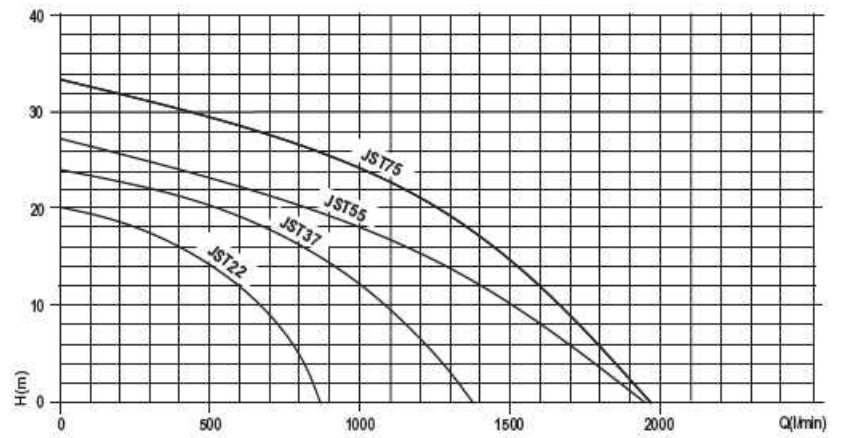

JST 37

