

SUBMERSIBLE PUMPS

JST KZN-H/L INDUSTRIAL HEAVY DUTY PUMPS

A


Top outlet providing maximum motor cooling for continuous operation. Built in agitator, specially designed to create a mixing action at the pump inlet causing the solids to move in suspension and to help keep the impeller and flow chamber clear and unclogged. Heavy duty Hi Cromium impeller, diffuser plate and agitator. Male BSP threaded outlets, direct online starting and 20 metres of power cable. 1500 RPM motors. Twin silicon mechanical seals. Maximum liquid temperature 40°C.

Features

- Cast Iron Pump Body
- HICR Impeller
- Max Solids JST55-75KZNH 25mm
JST110KZNH-JST220KZNL 35mm

Applications

- Heavy Duty
- Sewage
- Dirty Water
- De watering
- Sand/Sludge/Slurry

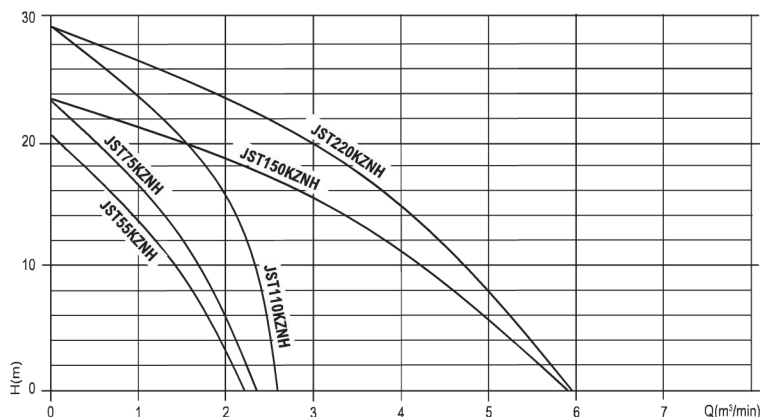

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE	PRICE
JST-55 KZN-H	400v	3"	2205/20.5	5.5	11.5	820 x 410 x 420	150	011-088	
JST-75 KZN-H	400v	4"	2345/23.5	7.5	15.2	840 x 410 x 420	170	011-096	
JST-110 KZN-H	400v	4"	2585/29	11	22.7	1100 x 565 x 585	280	011-098	
JST-150 KZN-L	400v	6"	5910/23.5	15	29.9	1100 x 565 x 585	285	011-118	
JST-220 KZN-L	400v	8"	5960/29	22	45.5	1493 x 560 x 578	470	011-120	