

PRESSURE BOOSTING SYSTEMS

SINGLE PUMP BOOSTERS

E


Self priming single pump booster sets complete with pressure switch and s/steel accumulator vessel. Water supply is not always enough to supply the correct amount of water at a suitable pressure, so the best and most affordable solution to solve water deficiency problems is to install a pumped booster system via a 'break' tank. These systems are specifically designed to boost the pressure of the water supply and deliver the correct amount of water to all outlets. The pre-set pressure switch enables it to automatically start and stop the pump. Do not allow to run dry.

Features

High Pressure
Automatic

Applications

Water Boosting
Washing Systems

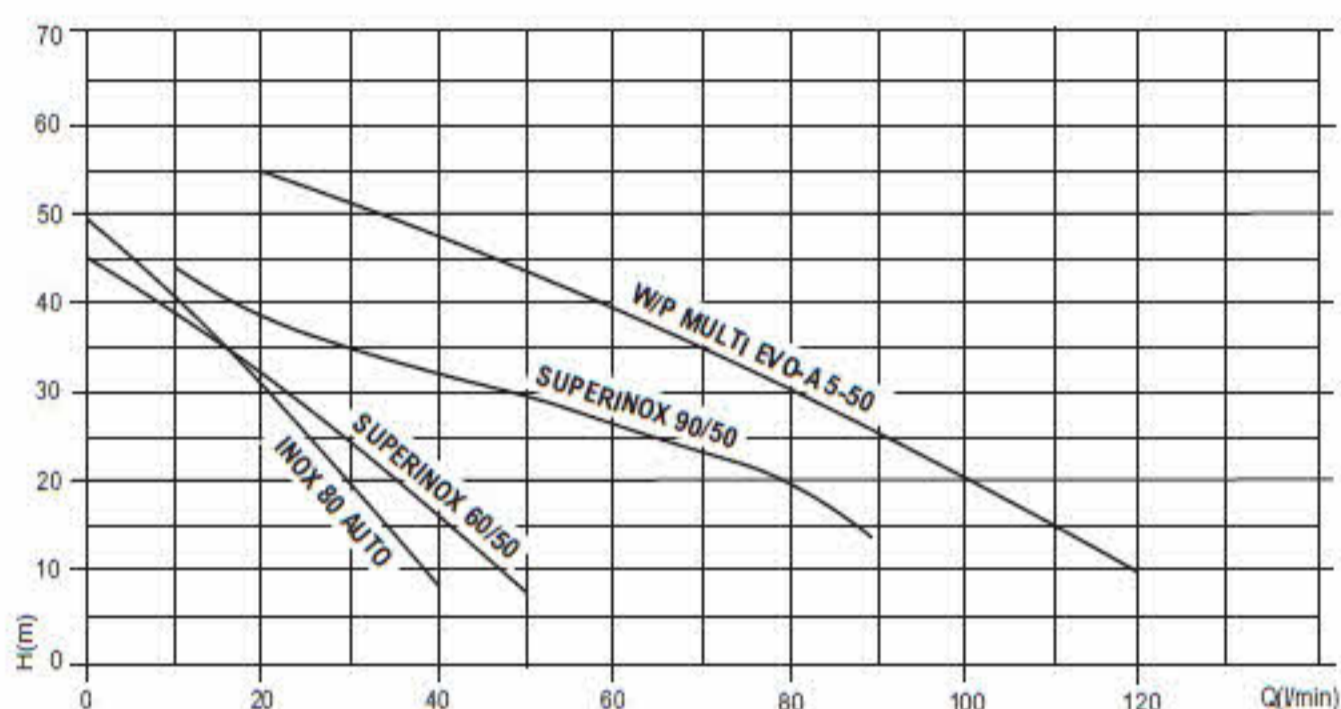

SUPERINOX 60/50



INOX 80 AUTO

MODEL	VOLT	TANK SIZE	INLET/ OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE	PRICE
SUPERINOX 60/50	230v	25L	1" x 1"	55/45	0.55	4	550 x 280 x 530	11	022-462	
SUPERINOX 90/50	230v	25L	1¼" x 1"	80/45	0.90	7	580 x 280 x 530	12	022-464	
W/P MULTI EVO-A 5-50M	230v	25L	1" x 1"	100/55	0.95	6.2	550 x 260 x 520	13	022-495	
W/P MULTI EVO-A 5-50M+	230v	60L	1" x 1"	100/55	0.95	6.2	640 x 370 x 640	23	022-500	
INOX 80 AUTO	110v	25L	1" x 1"	40/45	0.59	9	580 x 280 x 530	12	022-302	