

SURFACE MOUNTED PUMPS

MACHINE TOOL COOLANT (SUDS) PUMPS

E


Machine tool suds pumps designed for the pumping of cooling liquids, cutting compounds and cutting oil. Flanged designed for vertical assembly directly on top of the coolant vessels. Minimum and maximum temperatures are 0-60°C. Not for pumping abrasives, so the liquid being pumped has to be filtered to stop impurities entering the pump chamber. Plastic impeller.

Features

Coolant Pump for Machine Tools

Applications

Cooling Lubricants

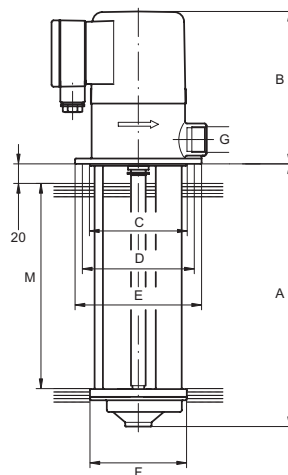

TYPE	A mm	B mm	C mm	D mm	E mm	F mm	M mm
4COA-2-12	120	156	100	115	130	99.5	80
4COA-2-17	170	156	100	115	130	99.5	130
4COA-2-22	220	156	100	115	130	99.5	180
4COA-2-27	270	156	100	115	130	99.5	230
4COA-4-12	120	156	100	115	130	99.5	80
4COA-4-17	170	156	100	115	130	99.5	130
4COA-4-22	220	156	100	115	130	99.5	180
4COA-4-27	270	156	100	115	130	99.5	230
4COA-6-12	120	171	140	160	180	99.5	80
4COA-6-17	170	171	140	160	180	99.5	130
4COA-6-22	220	171	140	160	180	99.5	180
4COA-6-27	270	238	140	160	180	99.5	230
4COA-10-27	270	238	140	160	180	130	210
4COA-10-35	350	238	140	160	180	130	290

MODEL	VOLTAGE	OUTLET	LM/HM	WATT	AMPS	Kg	CODE	PRICE
4COA-2-12 (NT-120)	400v	3/4"	25/4	90	0.35	3.5	075-010	
4COA-2-17 (NT-170)	400v	3/4"	25/4	90	0.35	3.8	075-012	
4COA-2-22 (NT-220)	400v	3/4"	25/4	90	0.35	4.1	075-014	
4COA-2-27 (NT-270)	400v	3/4"	25/4	90	0.35	4.4	075-016	
4COA-4-12 (NU-120)	400v	3/4"	40/4	120	0.45	3.7	075-020	
4COA-4-17 (NU-170)	400v	3/4"	40/4	120	0.45	4.0	075-022	
4COA-4-22 (NU-220)	400v	3/4"	40/4	120	0.45	4.4	075-024	
4COA-4-27 (NU-270)	400v	3/4"	40/4	120	0.45	4.7	075-026	
4COA-6-12 (NV-120)	400v	3/4"	63/4	155	0.6	4.3	075-028	
4COA-6-17 (NV-170)	400v	3/4"	63/4	155	0.6	4.6	075-030	
4COA-6-22 (NV-220)	400v	3/4"	63/4	155	0.6	5.0	075-032	
4COA-6-27 (NV-270)	400v	3/4"	63/4	155	0.6	5.3	075-034	
4COA-10-27 (NZ-270)	400v	1 1/4"	100/4	360	1.1	7.6	075-036	
4COA-10-35 (NZ-350)	400v	1 1/4"	100/4	360	1.1	8.4	075-038	
400v To 230v Single Phase Conversion (NETT)							075-040	