

JE 3-240 G10 FT20

Electric - Qmax 88 m³/h (390 USGPM) - Hmax 74 m (242.5 ft)



Product data

Suction port	threaded - 3" BSP
Delivery port	threaded - 3" BSP
Qmax	88 m ³ /h (390 USGPM)
Hmax	74 m (242.5 ft)
Solids handling	14 mm (0.6")
Motor power	18,5 kW - 25 HP
Weight	240 kg (530 lb)

Indicative picture of the product

J

Self-priming centrifugal pumps

The J series self-priming centrifugal pumps are for applications where the main feature is the difficulty in priming: even with suction heights of several meters the machine quickly evacuates the air from the suction pipe and starts pumping. Furthermore, compared to other pumps, the **semi-open impeller** makes the J suitable for pumping liquids with **solids** in suspension.

Applications

Varisco S.p.A. has a long-standing experience in designing and producing self-priming pumps and now has a wide range of solutions and materials. The J have features that not only meet the needs of the market but make it an extremely versatile product suitable for professionals of Constructions, Industry and Emergency duty.

Drainage of excavations, canals and ponds

Ground water dewatering with wellpoint systems

Sewage by-pass

Naval platforms ballasting

Drainage after flooding or torrential rains

Benefits

Rapid self-priming

without foot valve up to a height of 7.5 m (24.5 ft)

High resistance

to abrasive liquids and turbid sandy waters

Semi-open impeller

solids handling up to 14 mm (0.6")

Wear plate

in cast iron lined with abrasion resistant rubber, easily replaceable, front to the impeller

Easy maintenance

removable front cover for direct access to the impeller and eventual unclogging

Connections

Suction at only 0,4 m (1.2 ft) from ground level



Performance curves

Test according to UNI EN ISO 9906 standard - level 2


Test liquid: clean water, density 1,000 kg/m³

Spherical solids handling: D.14 mm (0.6")

Priming time: 60 s from 1,5 m (4.9 ft)

Max absorbed power: 16,0 kW - 21.5 HP (2.900 rpm)

Recommended operating range

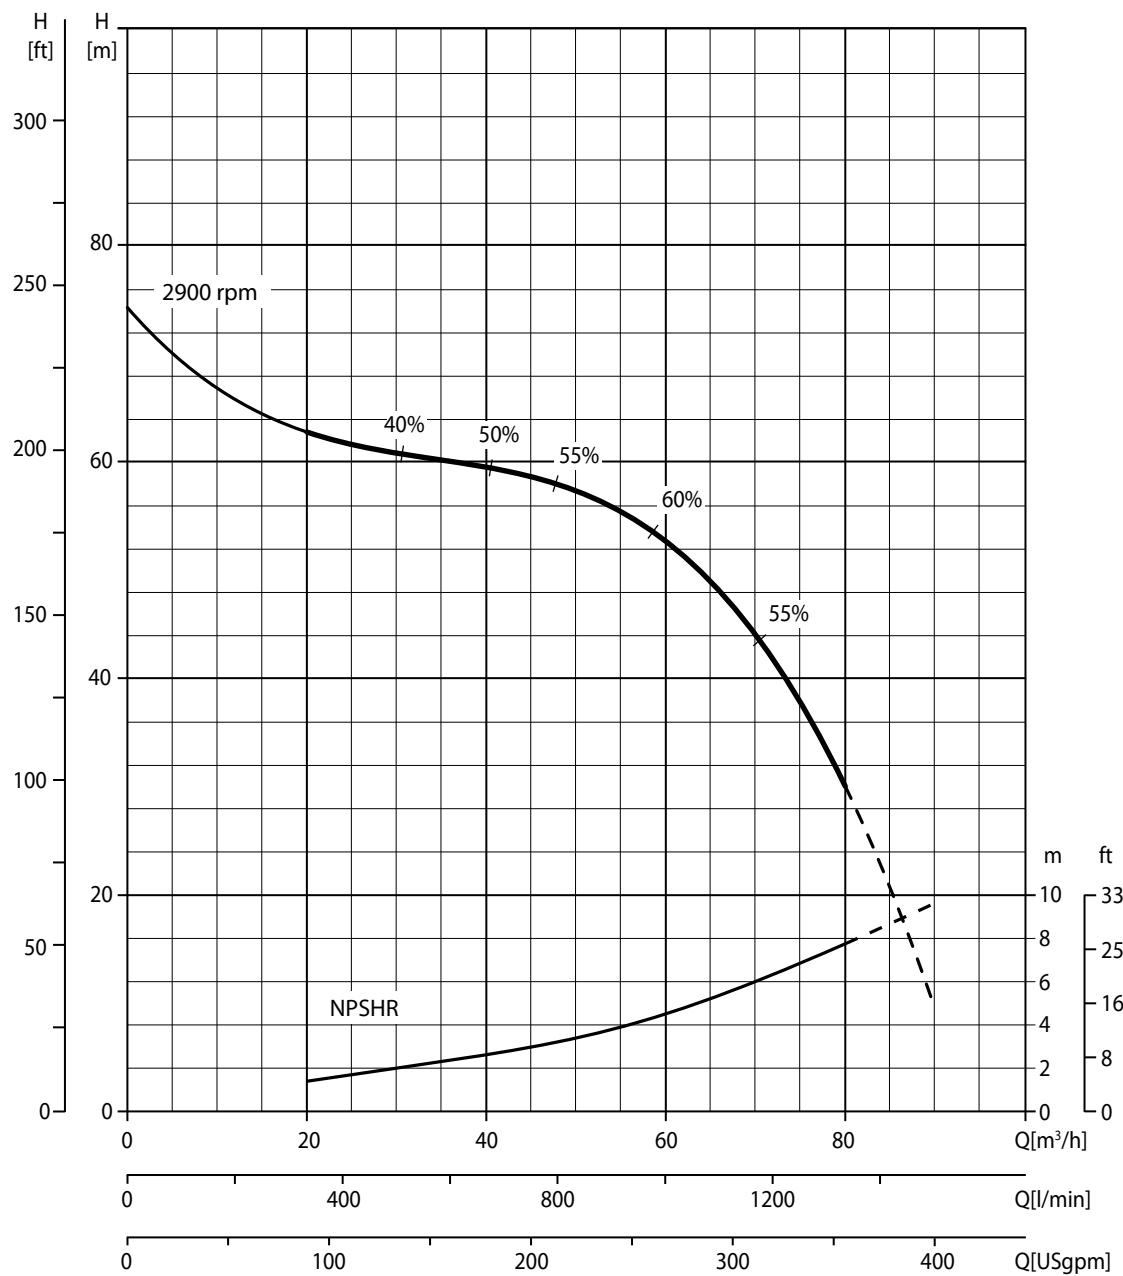

JE 3-240 G10 FT20

Technical data

Pump

Pump model	J 3-240 G10
Qmax	88 m ³ /h - 1.470 l/min (400 USGPM)
Hmax	74 m (242.5 ft)
Suction port	threaded - 3" BSP
Delivery port	threaded - 3" BSP
Impeller type	closed, 4 vane
Solids handling	14 mm (0.6")
Casing	EN-GJS-500 cast iron
Impeller	EN-GJS-500 cast iron
Wear plate	EN-GJL-200 rubber lined cast iron
Non-return valve	check-valve, NBR
Shaft	39NiCrMo3 steel
Mechanical seal	Silicon carbide
Elastomers	NBR
Lubrication	grease



Motor

Supply	electric
Type	three-phase TEFC
No. poles	2
Tension supply	400-690 V
Frequency	50 Hz
Rated power	18,5 kW - 25 HP
Rated speed	2.900 rpm
Rated current, In (400V)	31,4 A
Class efficiency	IE3 - IEC 60034-30
Max efficiency	92,4 %
Protection rating	IP55
Insulation class	F
Thermal protection	No. 3 PTC thermistor
Rpm type	fixed
Service type	continuous - S1



JE 3-240 G10 FT20

Arrangement

Model	close-coupling F
Dimensions	396 x 1.077 x 454 mm (16 x 42 x 18 ")
Coatings	bicomponent, average thickness of 80 µm
Color	RAL 5010 blue (standard)
Features	close-coupling with rigid coupling
Height connection	0,4 m (1.2 ft)



varisco
solid pumping solutions

Dimensions

Weight

Dry weight 240 kg (530 lb)

EN ISO 9001:2008 REG. NO 44 100 091767



Varisco S.p.A. has certified its Quality Management System in accordance with the requirements of the ISO 9001:2008 international standards. The quality of the product comes from the quality of the processes: standardise activities, enhance human resources, pursue a logic of continuous improvement aiming for the constant satisfaction of its Customers.

Varisco S.p.A.

Terza strada, 9 - Z.I. Nord 35129 PADOVA - Italy
tel +39 049 8294 111 fax +39 049 80 76 762
export@variscospa.com

www.variscospa.com

Varisco S.p.A. reserves the right to modify anytime and without prior notice the data of this document.