

Customer	Date	1/17/2019
Contact	Project	
Phone number	Project no.	
Email		

1SV25T015M

Operating data

Pump type	Single head pump	Fluid	Water
No. of pumps / Reserve	1 / 0	Operating temperature t A	°C 4
Nominal flow	m³/h 0	pH-value at t A	7
Nominal head	m 0	Density at t A	kg/m³ 1000
Static head	m 0	Kin. viscosity at t A	mm²/s 1.569
Inlet pressure	kPa 0	Vapor pressure at t A	kPa 100
Environmental temperature	°C 20	Solids	0
Available system NPSH	m 0	Altitude	m 0

Pump data

Make	Lowara	Nominal	m³/h ()
Speed	rpm 2900	Max-	m³/h 2.4
Number of stages	25	Min-	m³/h
Max. casing pressure	kPa	Nominal	m
Max. working pressure	kPa 1497	Head	at Qmax m 72.7
Head H(Q=0)	m 150	at Qmin	m 152.6
Weight	kg 32	Shaft power	kW ()
Max.	mm 73	Max. shaft power	kW 1.3
Impeller R	designed mm 73	Efficiency	%
Min.	mm 73	NPSH	3% m

Pump Materials

Shaft Seal

Pump body	Stainless steel / AISI 304	e-SV Mechanical seal	Roten
IMPELLER	Stainless steel / AISI 304	e-SV - Uniten (-30 / +120 °C)	
DIFFUSER	Stainless steel / AISI 304	1 - Rotating part	Silicon Carbide
Outer sleeve	Stainless steel / AISI 304	2 - Stationary part	Resin impregnated carbon
SHAFT	Stainless steel / AISI 304	3 - Elastomers	EPDM
ADAPTER	Cast iron	4 - Springs	AISI 316
Base	Aluminium	5 - Other components	AISI 316
COUPLING	Aluminium		
SEAL HOUSING	Stainless steel / AISI 304		
Coupling protection	Stainless steel / AISI 304		
Shaft sleeve and bushing	Tungsten carbide		
Fill / drain plugs	Stainless steel / AISI 304		
Tie rods	Galvanized steel		
WEAR RING	Technopolymer PPS		

Motor data

Manufacturer	Lowara	Electric voltage	230 V	Speed	2810 rpm	Insulation class	155 (F)
Specific design	Single phase surface motor (e-SV)			Frame size	90R	Colour	RAL 5010
Type	SM90RB14/115 (220-240V)						
Rated power	1.5 kW	Degree of protection	IP55				
Electric current	8.58 A						

Remarks:

Customer Contact Phone number Email	Date Project Project no.	1/17/2019
--	--------------------------------	-----------

1SV25T015M


Hydraulic data

Operating Data Specification		Hydraulic data (duty point)	Impeller design		
Flow	0 m ³ /h	Flow	Impeller R	73 mm	
Head	0 m	Head	Frequency	50 Hz	
Static head	0 m	MEI >=0,7	Speed	2900 rpm	

Power data referenced to:

Water [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

Performance according to ISO 9906:2012 – Grade 3B

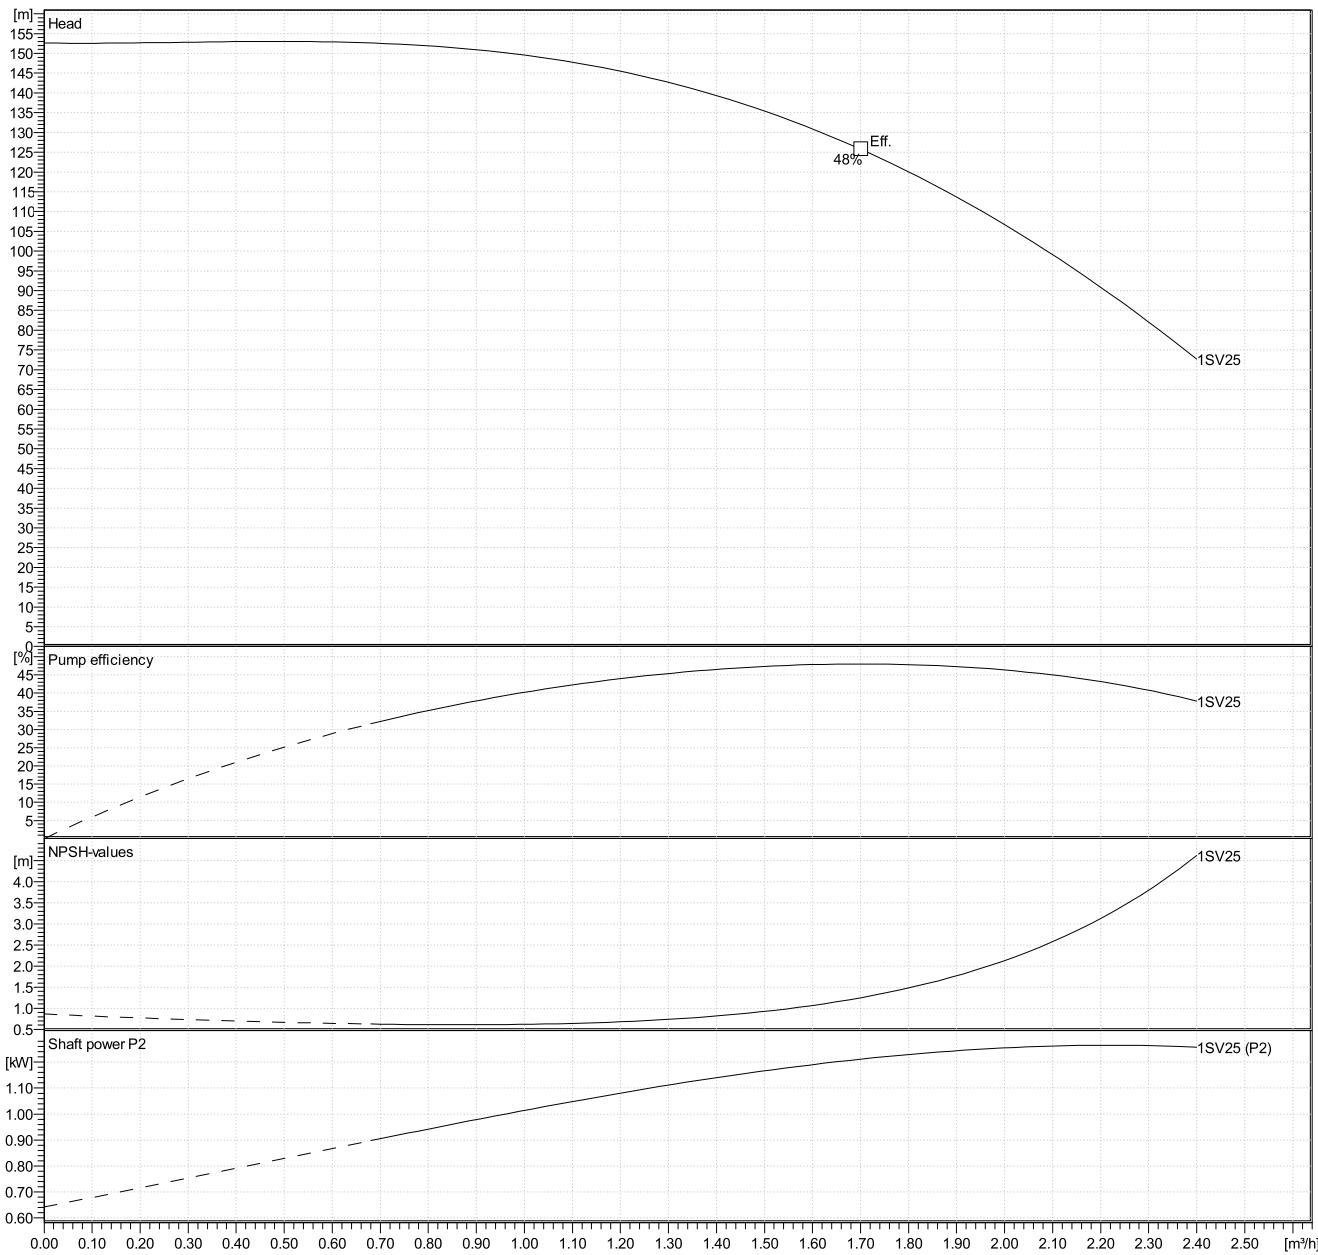


Customer Contact Phone number Email	Date Project Project no.	1/17/2019
--	--------------------------------	-----------

1SV25T015M

Drawing

Dimensional Data

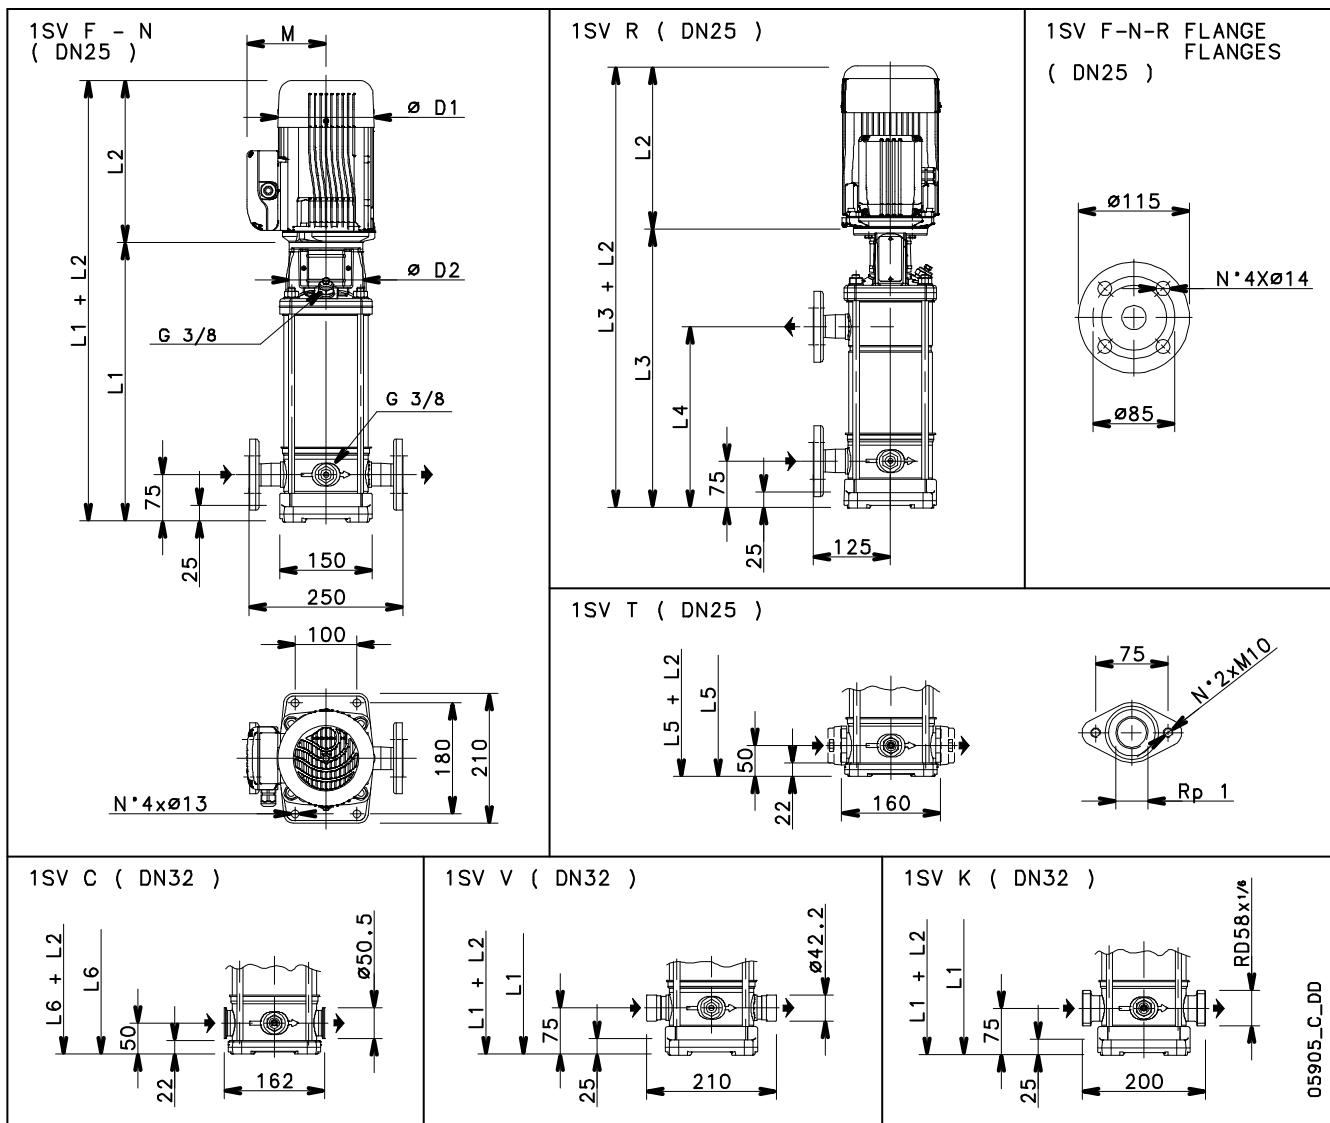


Dimensions mm


D1	155					Weight	
D2	140					32	kg
L1	738						
L2	263						
L3	738						
L4	567						
L5	713						
L6	713						
M	137						

1SV25T015M

Total lifetime	15	Inflation rate (rate of price increases)	2 %
Annual operating time	5600	Interest rate (for investment)	3 %
Energy cost per kWh	0.00 GBP		
Power input P1			

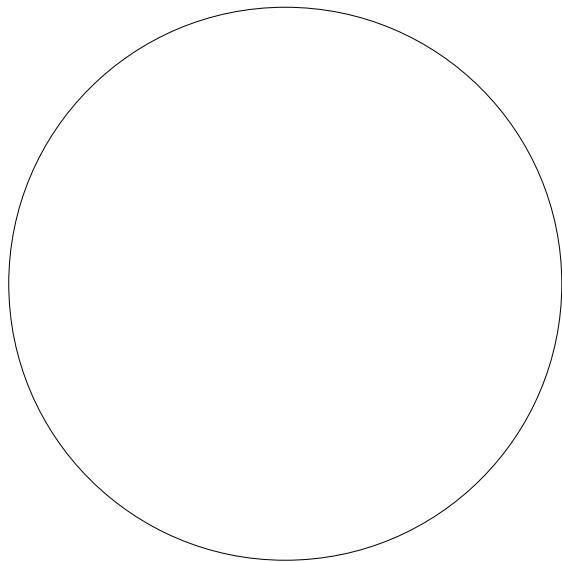Total costs


0%	0.00 GBP Energy
0%	0.00 GBP Investment costs
0%	0.00 GBP Installation & commissioning
0%	0.00 GBP Operating cost
0%	0.00 GBP Maintenance & repair
0%	0.00 GBP Downtime
0%	0.00 GBP Environmental
0%	0.00 GBP Decommissioning

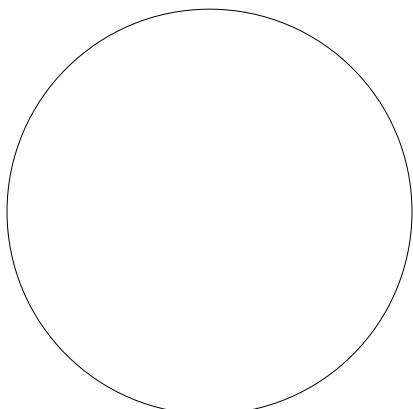GBP
First year costs


0%	0.00 GBP Energy (1st year)
0%	0.00 GBP Investment costs (1st year)
0%	0.00 GBP Installation & commissioning (1st year)
0%	0.00 GBP Operating cost (1st year)
0%	0.00 GBP Maintenance & repair (1st year)
0%	0.00 GBP Downtime (1st year)
0%	0.00 GBP Environmental (1st year)
0%	0.00 GBP Decommissioning (1st year)

GBP