

Receiver

Society
Reference
Address
Phone
Fax
E-mail

From

Item n° :

103002744

Model :

NOVA 600 M-A SV

Pump data

Free passage : 10 mm
Pressure rating :
Min. fluid temperature : 0 °C
Max. fluid temperature : 35 °C
Max. Ambient temperature : 40 °C

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998,3 kg/m³
Kinematic viscosity : 1,005 mm²/s
Vapor pressure :

Hydraulic data (duty point)

Flow :
Head :

Materials



Pump body Technopolymer
Impeller Technopolymer
OR ring NBR Rubber
Motor top body AISI 304 X5 Cr Ni 1810 UNI 6900/71
Rotor shaft AISI 431
Seeger ring 12E - UNI 7435 STAINLESS
Suction strainer Technopolymer

Motor data

Motor brand : DAB
Nominal power P2 : 0,55 kW
Rated speed : 2850 1/min
Rated voltage : 1~ 220-240 V
Nominal current : 3,4 A
Degree of protection : IP 68

50 Hz

Curve tolerance according to ISO 9906

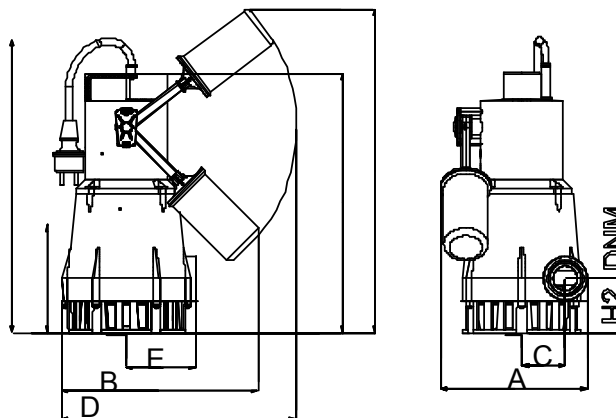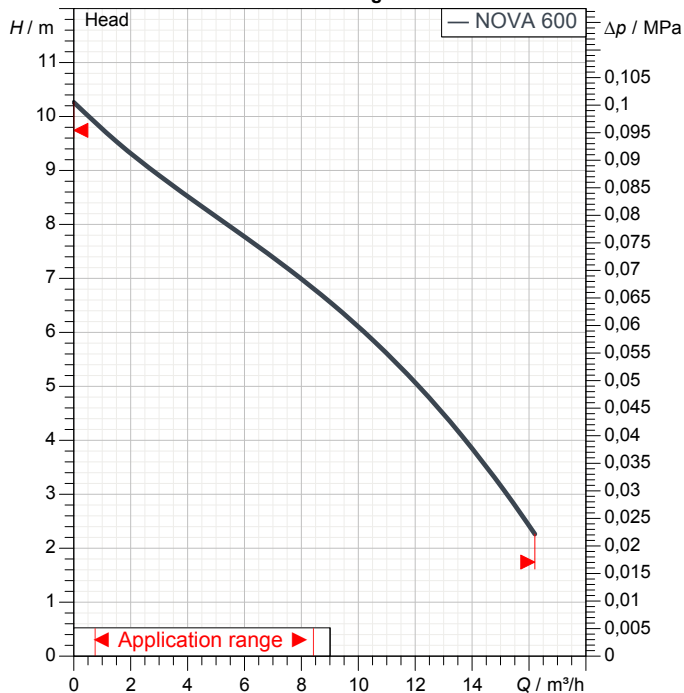

Weight : 7 kg

Dimensions in mm

A	189	H2	70,5		
B	253	LIV MAX	360		
C	56	LIV MIN	160		
D	303				
DNM	1" 1/4 G				
E	90				
H	334				
H1	416				

Pump connection

Suction side : /
Discharge side : 1" 1/4 G / --


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NOVA 600 M-A SV

Curve tolerance according to ISO 9906

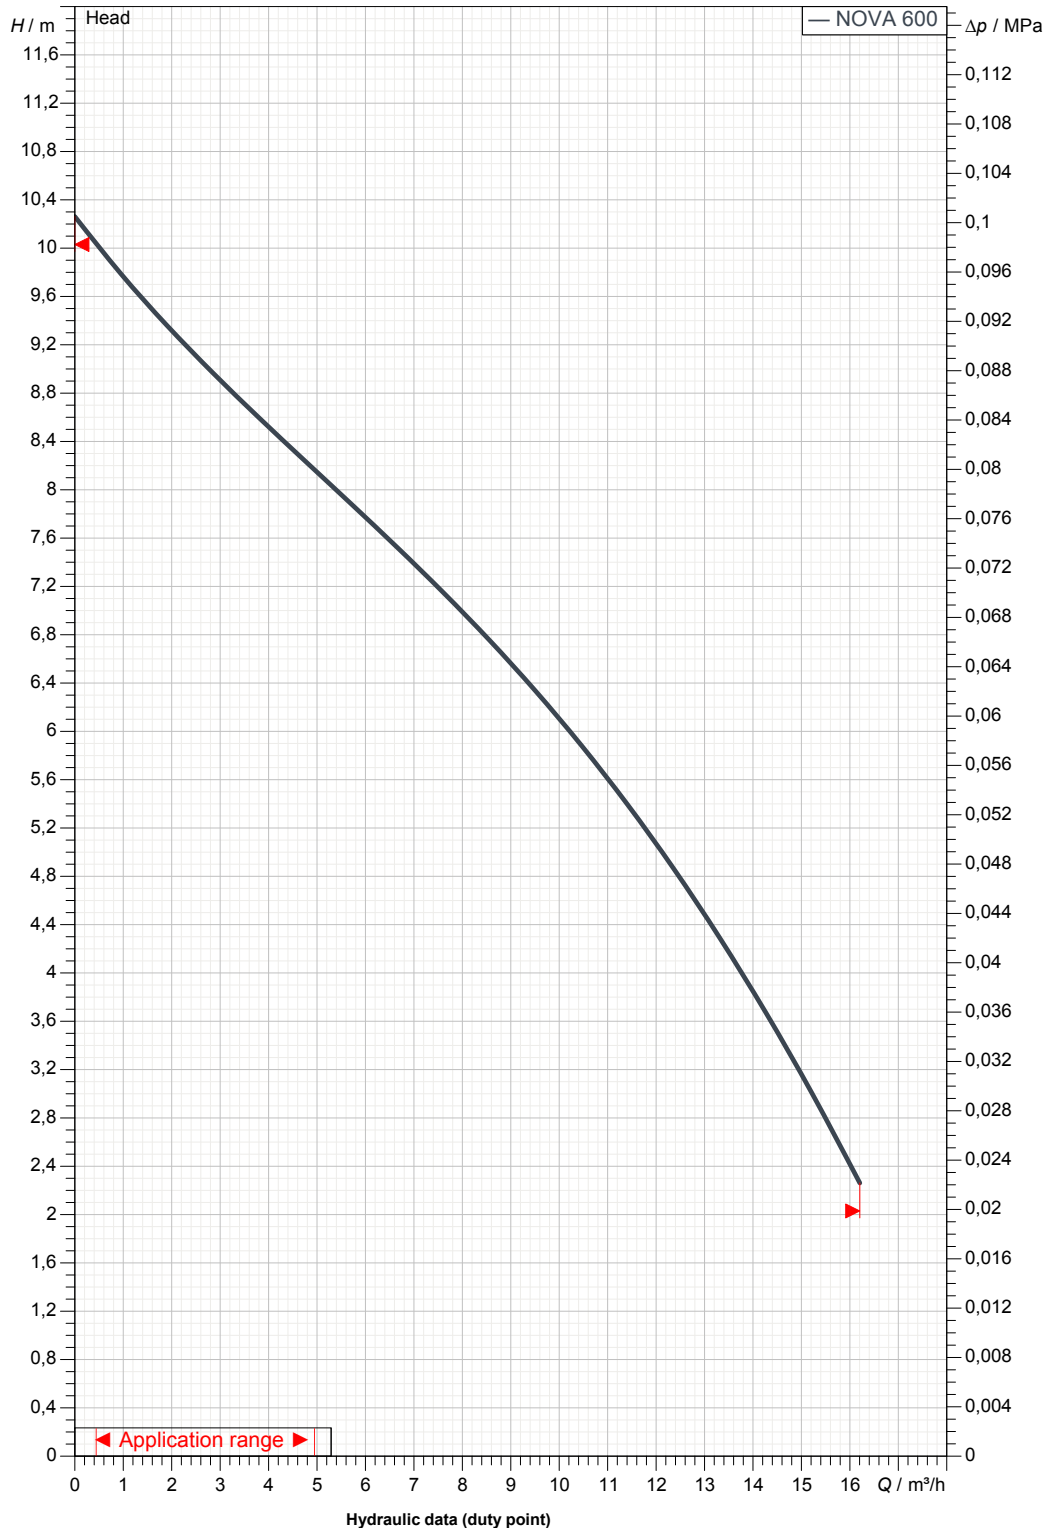

Suction side :

Discharge side :
1" 1/4 G
--

Flow :

Head :

Rated speed :
2850 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IT

OWNER_

ISSUE_DATE

Untitled project 2019-01-21 15:10:13.860


21/01/2019

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NOVA 600 M-A SV

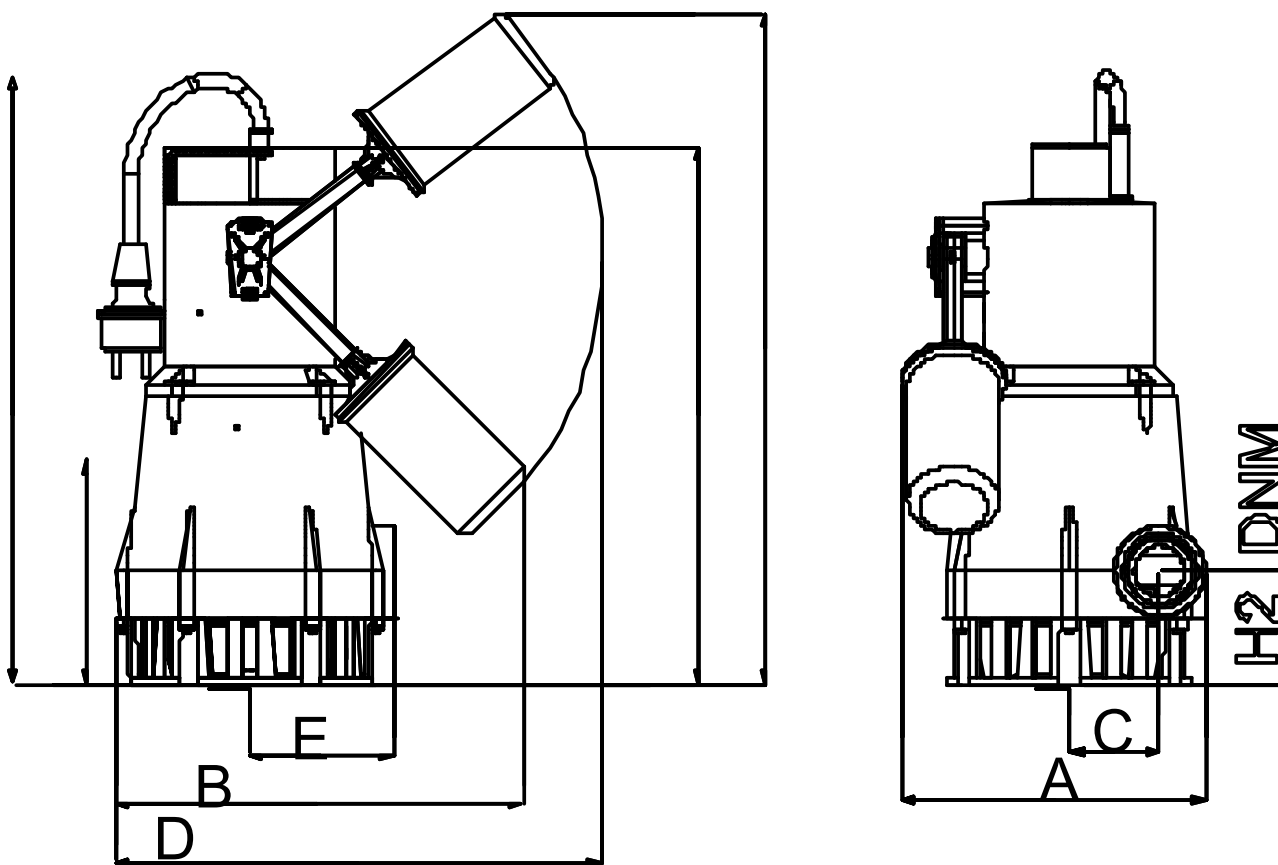

Dimensions in mm							Pump connection
1	A	189					Suction
2	B	253					
3	C	56					
4	D	303					
5	DNM	1" 1/4 G					Discharge 1 " 1/4 G --
6	E	90					
7	H	334					
8	H1	416					
9	H2	70,5					
10	LIV MAX	360					
11	LIV MIN	160					
MAIN_PROJECT_TITLE			BUSINESS_PROCESS_IL			OWNER_	ISSUE_DATE
			Untitled project 2019-01-21 15:10:13.860				21/01/2019