



Company name: Pump Sales Direct
Created by:
Phone: 08000086405
Email: customerservices@pumpsalesdirect.co.uk
Date: 28/07/2022

Qty.	Description																																										
1	<p>SP 17-3</p>  <p>Note! Product picture may differ from actual product</p> <p>Product No.: On request</p> <p>Submersible borehole pump, suitable for pumping clean water. Can be installed vertically or horizontally. All steel components are made in stainless steel, EN 1.4301 (AISI 304), that ensures high corrosive resistance. This pump carries drinking water approval.</p> <p>The pump is fitted with a 2.2 kW MS402 motor with sand shield, lip seal, water-lubricated journal bearings and a volume compensating diaphragm. The motor is a canned type submersible motor offering good mechanical stability and high efficiency. Suitable for temperatures up to 40 °C.</p> <p>The motor is not fitted with a temperature sensor. If temperature monitoring is desired, a Pt1000 sensor can be fitted.</p> <p>The motor is for direct-on-line starting (DOL).</p> <p>Liquid:</p> <table><tr><td>Pumped liquid:</td><td>Water</td></tr><tr><td>Liquid max temp:</td><td>40 °C</td></tr><tr><td>Max liquid t at 0.15 m/sec:</td><td>40 °C</td></tr><tr><td>Selected liquid temperature:</td><td>20 °C</td></tr><tr><td>Density:</td><td>998.2 kg/m³</td></tr></table> <p>Technical:</p> <table><tr><td>Pump speed on which pump data are based:</td><td>2900 rpm</td></tr><tr><td>Rated flow:</td><td>17 m³/h</td></tr><tr><td>Rated head:</td><td>24 m</td></tr><tr><td>Shaft seal for motor:</td><td>LIPSEAL</td></tr><tr><td>Approvals on nameplate:</td><td>CE,EAC</td></tr><tr><td>Curve tolerance:</td><td>ISO9906:2012 3B</td></tr><tr><td>Motor version:</td><td>T40</td></tr></table> <p>Materials:</p> <table><tr><td>Pump:</td><td>Stainless steel EN 1.4301 AISI 304</td></tr><tr><td>Impeller:</td><td>Stainless steel EN 1.4301 AISI 304</td></tr><tr><td>Motor:</td><td>Stainless steel DIN W.-Nr. 1.4301 AISI 304</td></tr></table> <p>Installation:</p> <table><tr><td>Pump outlet:</td><td>RP2 1/2</td></tr><tr><td>Motor diameter:</td><td>4 inch</td></tr></table> <p>Electrical data:</p> <table><tr><td>Motor type:</td><td>MS402</td></tr><tr><td>Rated power - P2:</td><td>2.2 kW</td></tr><tr><td>Power (P2) required by pump:</td><td>2.2 kW</td></tr><tr><td>Mains frequency:</td><td>50 Hz</td></tr></table>	Pumped liquid:	Water	Liquid max temp:	40 °C	Max liquid t at 0.15 m/sec:	40 °C	Selected liquid temperature:	20 °C	Density:	998.2 kg/m³	Pump speed on which pump data are based:	2900 rpm	Rated flow:	17 m³/h	Rated head:	24 m	Shaft seal for motor:	LIPSEAL	Approvals on nameplate:	CE,EAC	Curve tolerance:	ISO9906:2012 3B	Motor version:	T40	Pump:	Stainless steel EN 1.4301 AISI 304	Impeller:	Stainless steel EN 1.4301 AISI 304	Motor:	Stainless steel DIN W.-Nr. 1.4301 AISI 304	Pump outlet:	RP2 1/2	Motor diameter:	4 inch	Motor type:	MS402	Rated power - P2:	2.2 kW	Power (P2) required by pump:	2.2 kW	Mains frequency:	50 Hz
Pumped liquid:	Water																																										
Liquid max temp:	40 °C																																										
Max liquid t at 0.15 m/sec:	40 °C																																										
Selected liquid temperature:	20 °C																																										
Density:	998.2 kg/m³																																										
Pump speed on which pump data are based:	2900 rpm																																										
Rated flow:	17 m³/h																																										
Rated head:	24 m																																										
Shaft seal for motor:	LIPSEAL																																										
Approvals on nameplate:	CE,EAC																																										
Curve tolerance:	ISO9906:2012 3B																																										
Motor version:	T40																																										
Pump:	Stainless steel EN 1.4301 AISI 304																																										
Impeller:	Stainless steel EN 1.4301 AISI 304																																										
Motor:	Stainless steel DIN W.-Nr. 1.4301 AISI 304																																										
Pump outlet:	RP2 1/2																																										
Motor diameter:	4 inch																																										
Motor type:	MS402																																										
Rated power - P2:	2.2 kW																																										
Power (P2) required by pump:	2.2 kW																																										
Mains frequency:	50 Hz																																										




Company name: Pump Sales Direct
Created by:
Phone: 08000086405
Email: customerservices@pumpsalesdirect.co.uk
Date: 28/07/2022

Qty.	Description
1	<p>Rated voltage: 3 x 380-400-415 V Rated current: 5.50-5.50-5.70 A Starting current: 440-460-470 % Cos phi - power factor: 0.85-0.82-0.77 Rated speed: 2850-2860-2870 rpm Start. method: direct-on-line Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): B Built-in temp. transmitter: no Motor No: 79192007 Windings: Enamelled</p> <p>Others:</p> <p>Minimum efficiency index, MEI ≥: 0.70 ErP status: EuP Standalone/Prod. Net weight: 20.4 kg Gross weight: 22.9 kg Shipping volume: 0.032 m³ Danish VVS No.: 388336030 Finnish LVI No.: 4762716 Country of origin: GB Custom tariff no.: 84137029</p>



Company name: Pump Sales Direct
Created by:
Phone: 08000086405
Email: customerservices@pumpsalesdirect.co.uk
Date: 28/07/2022





On request SP 17-3 50 Hz

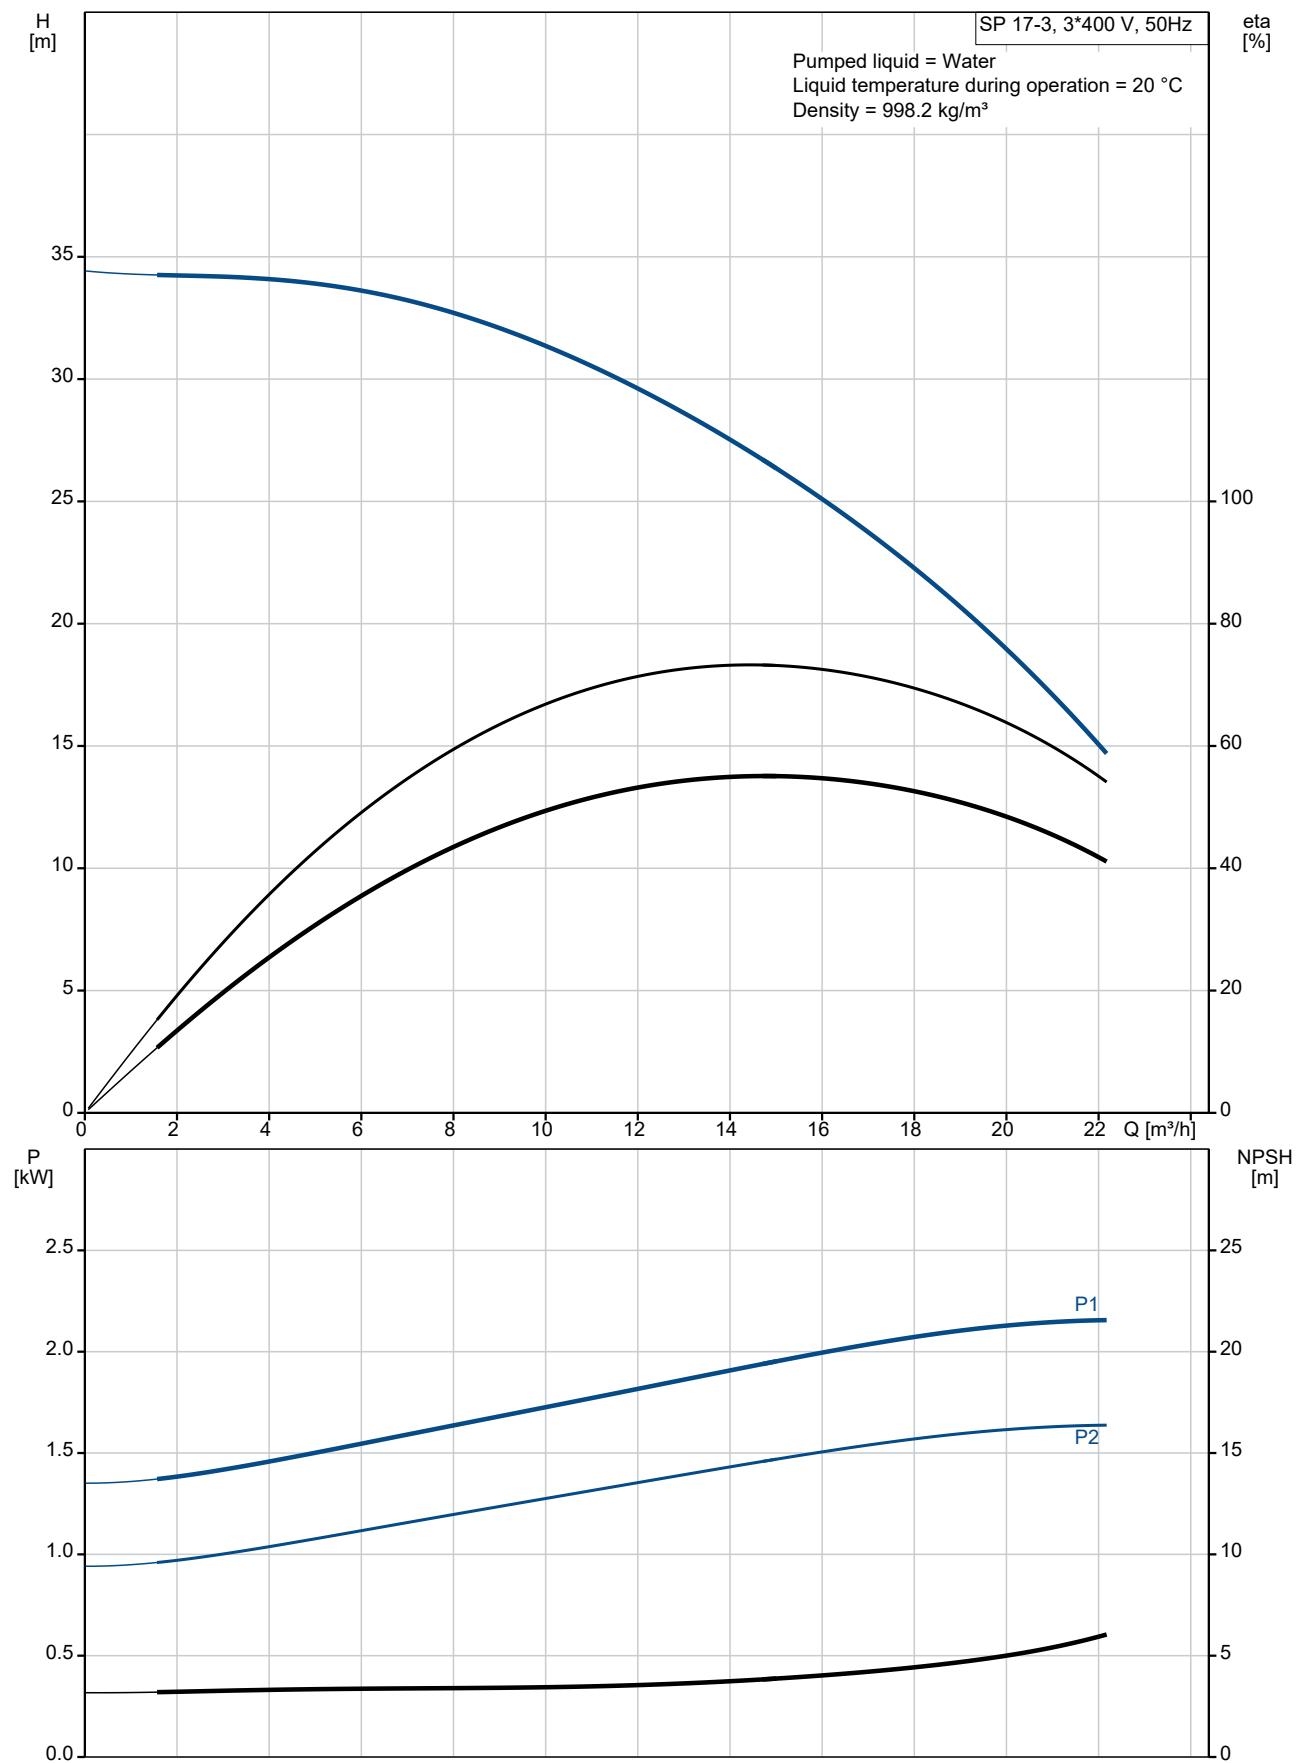



Company name: Pump Sales Direct
Created by:
Phone: 08000086405
Email: customerservices@pumpsalesdirect.co.uk
Date: 28/07/2022


Description	Value
General information:	
Product name:	SP 17-3
Product No:	On request
EAN number:	On request
Technical:	
Pump speed on which pump data are based:	2900 rpm
Rated flow:	17 m ³ /h
Rated head:	24 m
Stages:	3
Impeller reduc.:	NONE
Shaft seal for motor:	LIPSEAL
Approvals on nameplate:	CE,EAC
Curve tolerance:	ISO9906:2012 3B
Model:	B
Valve:	YES
Motor version:	T40
Materials:	
Pump:	Stainless steel
Pump:	EN 1.4301
Pump:	AISI 304
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
Motor:	Stainless steel
Motor:	DIN W.-Nr. 1.4301
Motor:	AISI 304
Installation:	
Pump outlet:	RP2 1/2
Motor diameter:	4 inch
Liquid:	
Pumped liquid:	Water
Liquid max temp:	40 °C
Max liquid t at 0.15 m/sec:	40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Motor type:	MS402
Appl. motor:	GRUNDFOS
Rated power - P2:	2.2 kW
Power (P2) required by pump:	2.2 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-400-415 V
Rated current:	5.50-5.50-5.70 A
Starting current:	440-460-470 %
Cos phi - power factor:	0.85-0.82-0.77
Rated speed:	2850-2860-2870 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	B
Built-in motor protection:	NONE
Thermal protec:	external
Built-in temp. transmitter:	no
Motor No:	79192007
Windings:	Enamelled
Others:	
Minimum efficiency index, MEI ≥:	0.70
ErP status:	EuP Standalone/Prod.

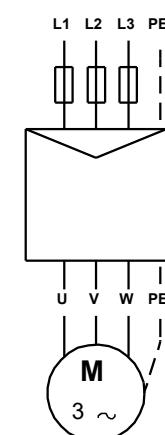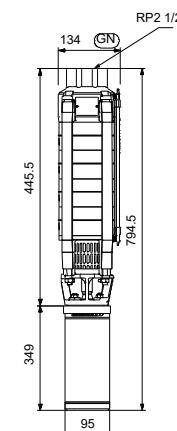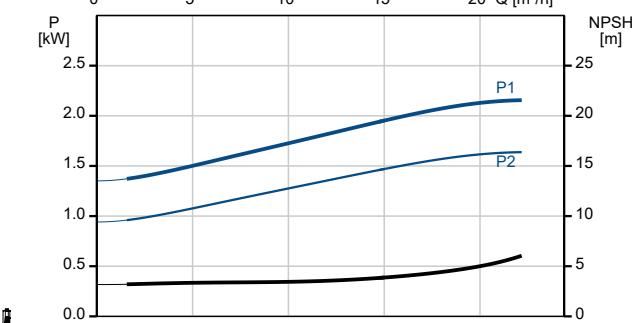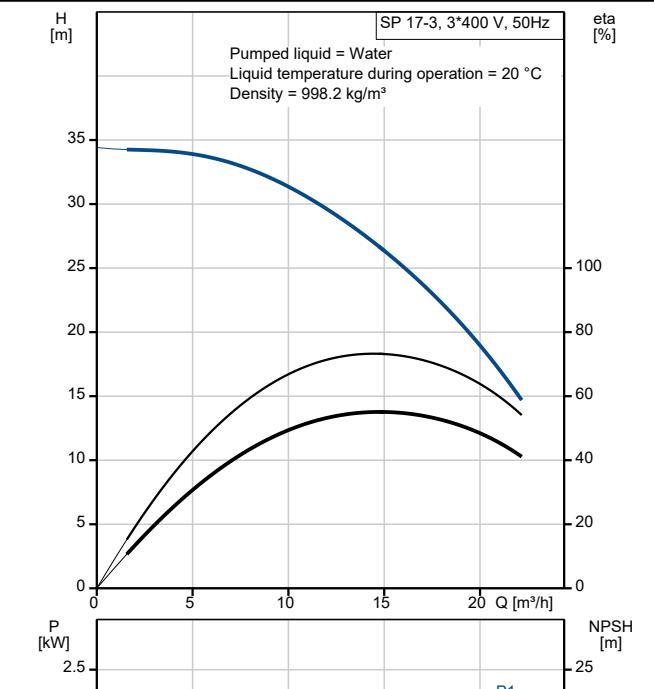




Company name: Pump Sales Direct
Created by:
Phone: 08000086405
Email: customerservices@pumpsalesdirect.co.uk
Date: 28/07/2022

Description	Value
Net weight:	20.4 kg
Gross weight:	22.9 kg
Shipping volume:	0.032 m ³
Danish VVS No.:	388336030
Finnish LVI No.:	4762716
Country of origin:	GB
Custom tariff no.:	84137029

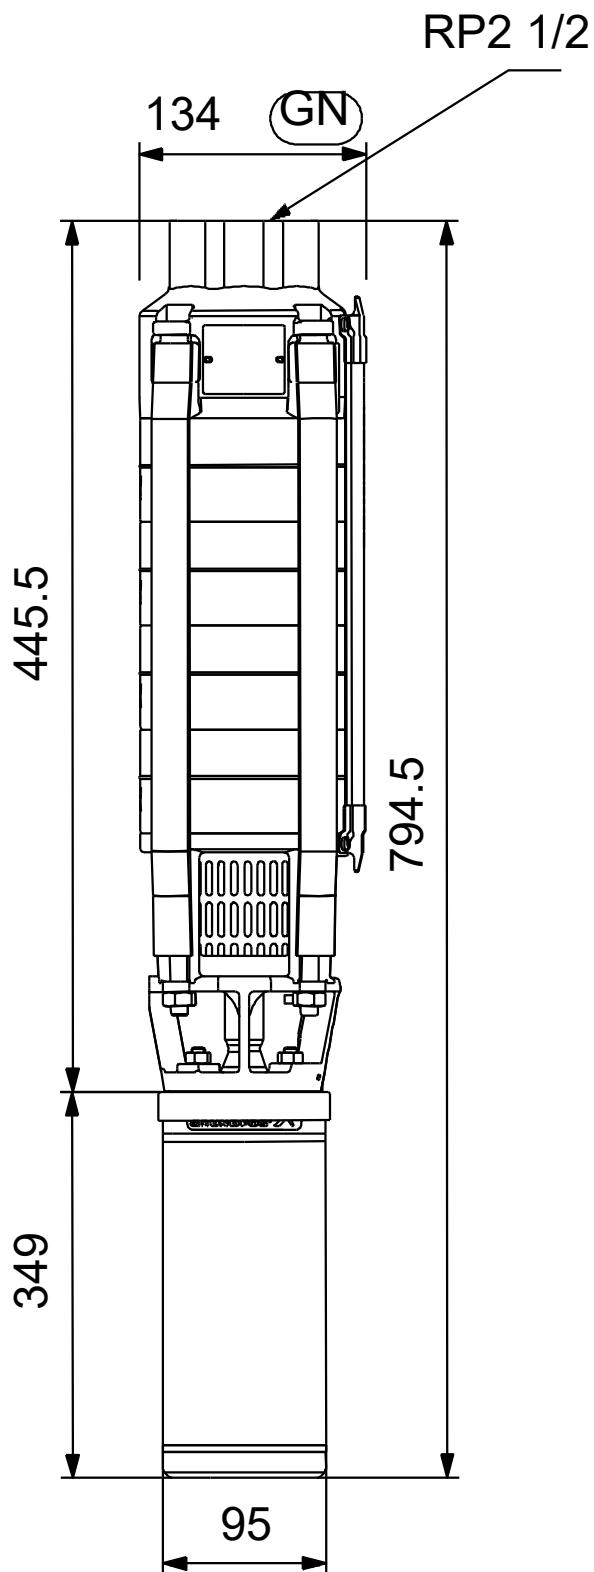On request SP 17-3 50 Hz

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

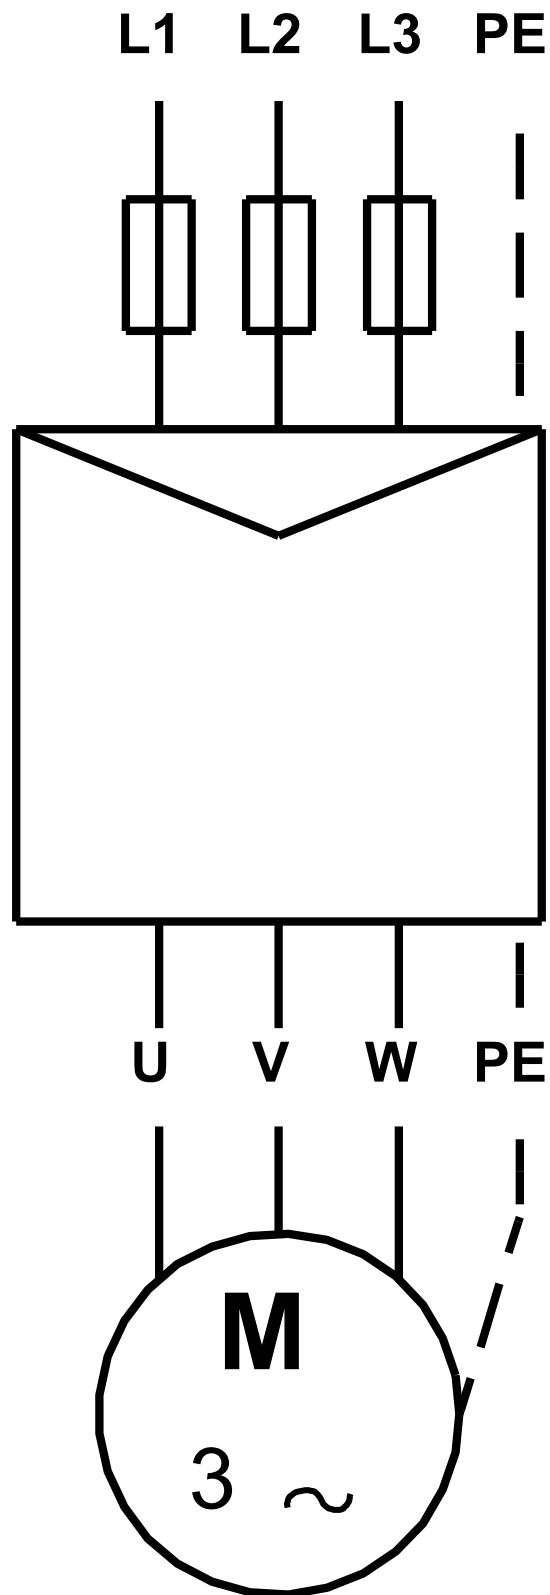On request SP 17-3 50 Hz

Note! All units are in [mm] unless others are stated.



Company name: Pump Sales Direct
Created by:
Phone: 08000086405
Email: customerservices@pumpsalesdirect.co.uk
Date: 28/07/2022

Order Data:

Position	Your pos.	Product name	Amount	Product No	Total
		SP 17-3	1	On request	Price on request