

Most heating and chilled water systems require chemical dosing and the dosing pot provides a controlled method of achieving this. Dosing pots are of a mild steel welded construction, supplied fully assembled for easy installation. The unit comes complete with tundish, vessel, air vent, inlet, outlet and drain valves.

#### Advantages

- Supplied fully assembled.
- Simple operations.
- Increases energy efficiency.
- Extends the life of the system.
- Internally uncoated to guarantee chemical compatibility with standard installations.

#### Technical Specifications

- Min./Max. working temperature: 5 °C / 95 °C.
- Max. working pressure: 16 bar.

#### Certifications and Standards Applied:


- PED 2014/68/EU Article 4 Paragraph 3 Sound Engineering Practice.
- Welding BS EN281-1.
- Fitting to BS21/ISO 7-1.

#### Material of Construction:

- Cylinder: EN/ISO S235JRG2.
- Dished Ends: EN/ISO S235JRG2.
- Fittings: Galvanised Steel.
- T-piece: Galvanised Steel.
- Tundish: EN/ISO S235JRG2.
- Valves: Chrome Plated Brass.
- Exterior finishing: Epoxy powder coating – Red (RAL 3002).



Description	Dosing pot MS 11L	
Order Code	17703	
GTIN	08712874177031	
Model	<u>Mild Steel Dosing Pots</u>	
Dimensions	A [mm]	935
	B [mm]	215
	D [mm]	200
Bolt Spacing (C)	279	
System connections	G $\frac{3}{4}$ " F	
Weight [kg]	9.1	

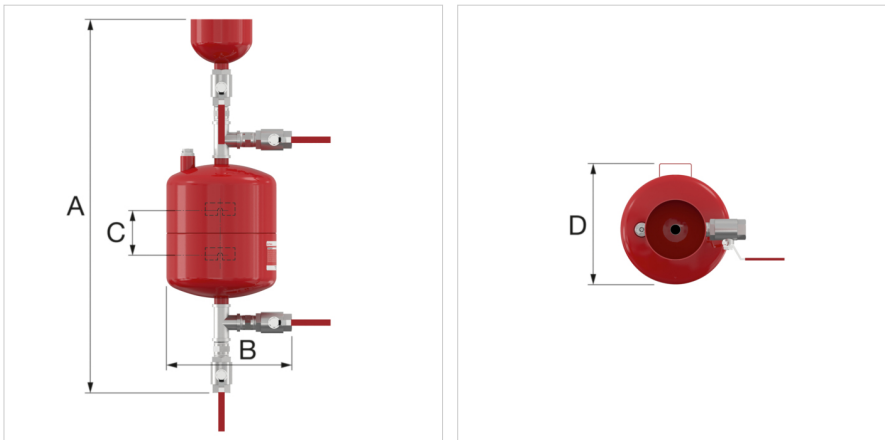

### Classification General Data

Etim Group

Etim Class

Product Name Dosing pot MS 11L

Brand Flamco

Product Type 11L

Artikelnummer 17703

GTIN 08712874177031

### Find more information online:

[Installation and operating instruction](#)

[Declaration of conformity](#)

[Dosing Pots DWG](#)

[Dosing Pots STEP](#)

[Dosing Pots RFA](#)

[Export catalogue](#)

[Packaging data](#)

Washway Lane  
UK-WA10 6PB, St Helens, Merseyside - gb

T +44 17 447 447 44  
E [uk.info@aalberts-hfc.com](mailto:uk.info@aalberts-hfc.com)  
I [flamcogroup.com/uk-en](http://flamcogroup.com/uk-en)