

Technical Data

Pump Name

EVMS1 14N5Q1BEGE/0.75

| | | | |
|----------|------------|------------|-----------|
| Customer | Date | 2022-04-19 | Company |
| Contact | Item no. | | Issued by |
| Phone | Project | | Phone |
| E-mail | Project ID | | E-mail |

Requested data

| | | | | |
|---|---------------------------|--------------------------|--------------------|-------------|
| 1 | Pump type | VERTICAL MULTISTAGE PUMP | Fluid | Water |
| 2 | Number of pumps / Reserve | 1 / 0 | Liquid temperature | °C 20 |
| 3 | Flow | m³/h | Kin. viscosity | cSt 1.005 |
| 4 | Head | m | Vapour pressure | kPa 2.34 |
| 5 | Geodetic head | m | PH value | |
| 6 | Inlet pressure (pin) | kPa 0 | Density | kg/m³ 998.3 |
| 7 | Available system NPSH | | Solids | Weight % 0 |
| 8 | Ambient temperature | °C 20 | | |

Pump

| | | | | |
|----|-----------------------|-----------------------------------|-----------------------------------|------------------------|
| 9 | Pump Name | EVMS1 14N5Q1BEGE/0.75 | Frequency | Hz 50 |
| 10 | Design | VERTICAL MULTISTAGE PUMP | Installation type | Oval flange (STANDARD) |
| 11 | Manufacturer | EBARA | Impeller Diameter | Max. mm 71 |
| 12 | Speed | rpm 2850 | | Designed mm 71 |
| 13 | No. of Stage | 14 | | Min. mm 71 |
| 14 | Connection | Suction side | Flow | Operating m³/h |
| 15 | Connection | Discharge side | | Max- m³/h 2.4 |
| 16 | Max. Working Pressure | kPa 1600 | | Min- m³/h 0.72 |
| 17 | Shut-off head | kPa 789.02 | Head | Operating m |
| 18 | Total weight | kg See the table of "Dimensions". | | - (Qmax.) m 46.9 |
| 19 | Shaft power | kW | | - (Qmin.) m 75.6 |
| 20 | | | Max. Shaft Power at max. impeller | kW 0.58 |
| 21 | Required pump NPSH | m | Efficiency | % |

Materials

| | | | |
|----|---------------------|----------|--|
| 22 | Impeller | AISI 304 | |
| 23 | Intermediate casing | AISI 304 | |
| 24 | Bottom casing | AISI 304 | |
| 25 | Shaft | AISI 304 | |
| 26 | O-ring | EPDM | |
| 27 | | | |

Motor

| | | | | |
|----|----------------------|------------------------------------|------------------|--------|
| 28 | Manufacturer | ETM | Insulation class | F |
| 29 | Type | TEFC_EVMS1 14/0.75_230_Three Phase | Phases | 3~ |
| 30 | Specific design | IE3 / 50 Hz / Pole pairs 1 | Frame size | 80 |
| 31 | Rated power | kW 0.75 | Weight | kg 8.5 |
| 32 | Number of poles | 2 | Electric voltage | V 230 |
| 33 | Speed | rpm 2845 | Electric current | A 3 |
| 34 | Degree of protection | IP 55 | | |
| 35 | | | | |

Remarks

Performance Curve

Pump Name

EVMS1 14N5Q1BEGE/0.75

| | | | |
|----------|------------|------------|-----------|
| Customer | Date | 2022-04-19 | Company |
| Contact | Item no. | | Issued by |
| Phone | Project | | Phone |
| E-mail | Project ID | | E-mail |

Requested data


| | | | |
|---|---------------|------|--|
| 1 | Flow | m³/h | |
| 2 | Head | m | |
| 3 | Geodetic head | m | |

Pump

| | | | | | |
|----------------------------|------|----|-----------------|-----|------|
| Operating Flow | m³/h | | Frequency | Hz | 50 |
| Operating Head | m | | Number of poles | | 2 |
| Impeller diameter designed | mm | 71 | Speed | rpm | 2850 |

Test standard: ISO 9906:2012 - Grade3B


Water; 20°C; 998.3kg/m³; 1cSt

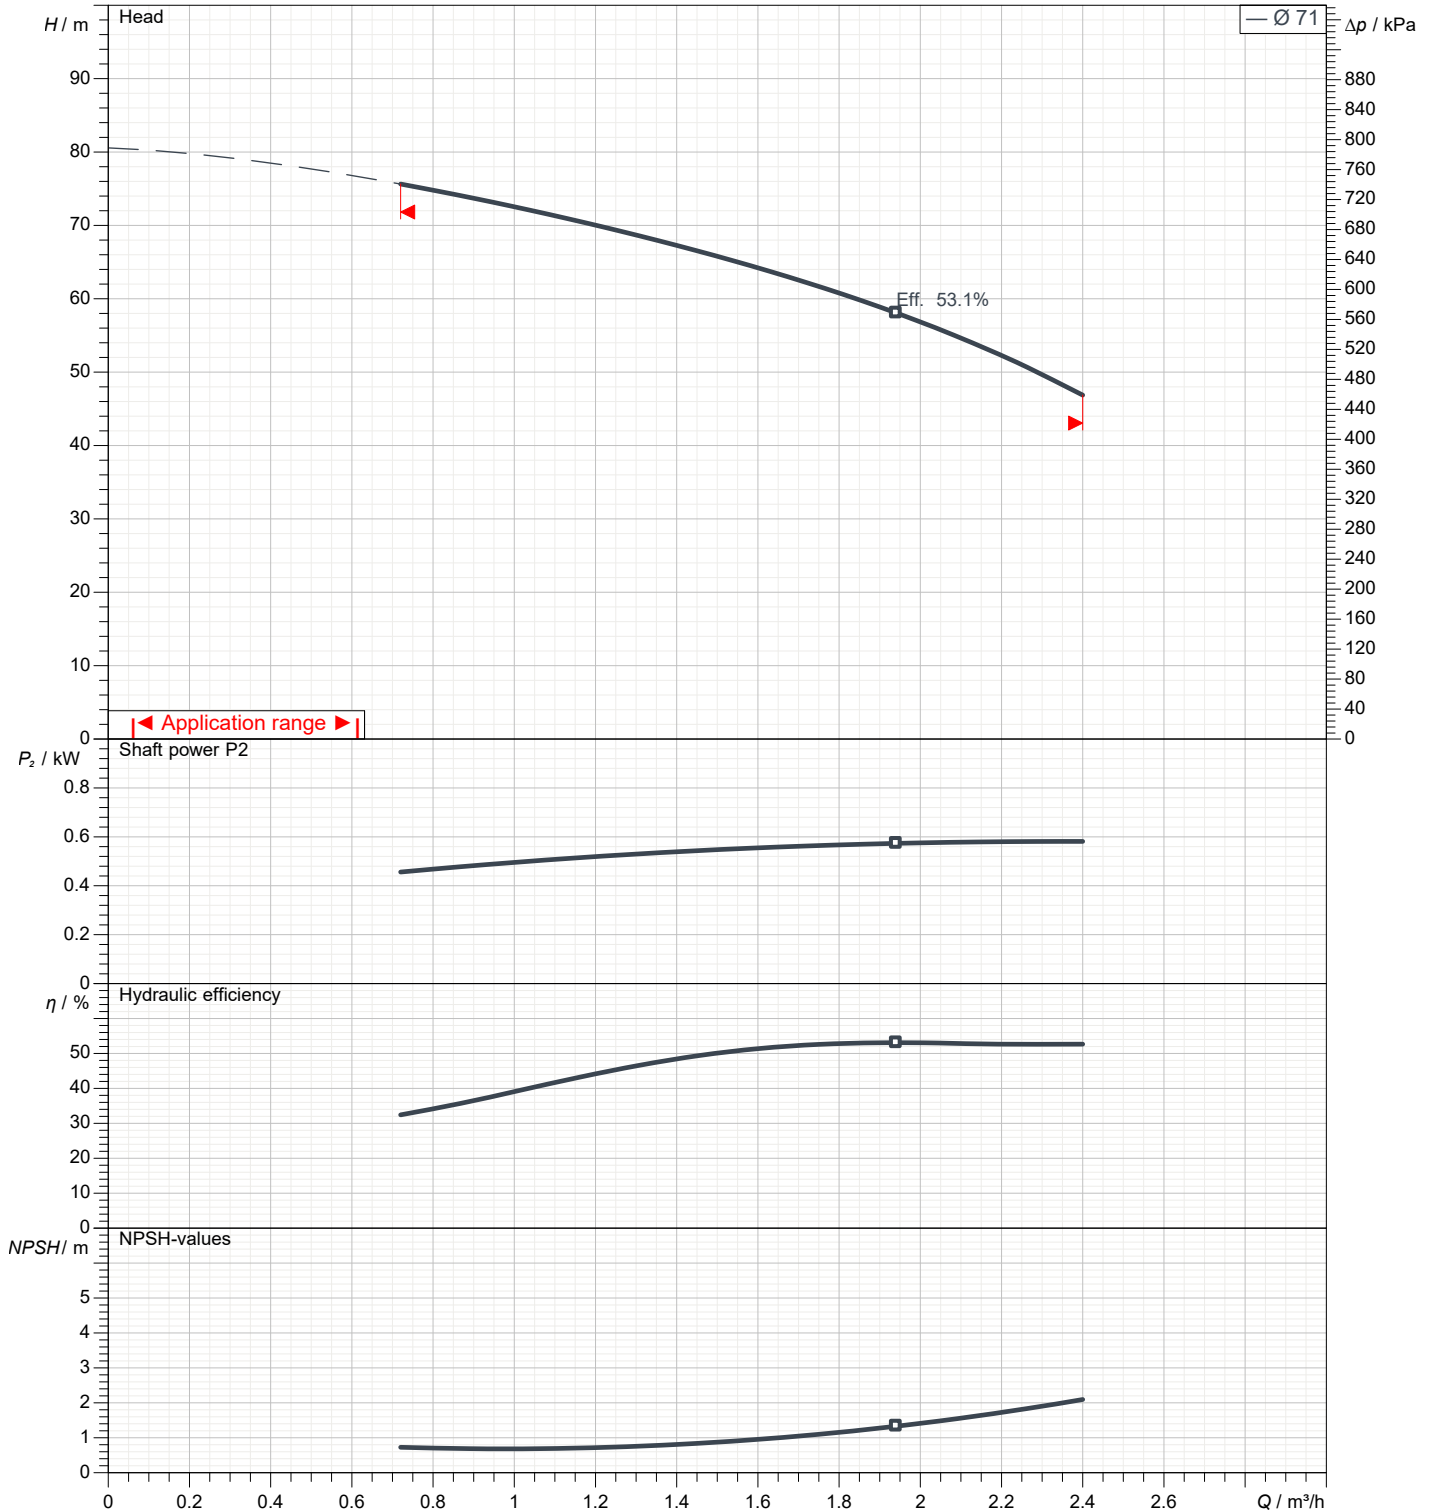

Dimensions

Pump name EVMS1 14N5Q1BEGE/0.75

| | | |
|----------|-----------------|-----------|
| Customer | Date 2022-04-19 | Company |
| Contact | Item no. | Issued by |
| Phone | Project | Phone |
| E-mail | Project ID | E-mail |

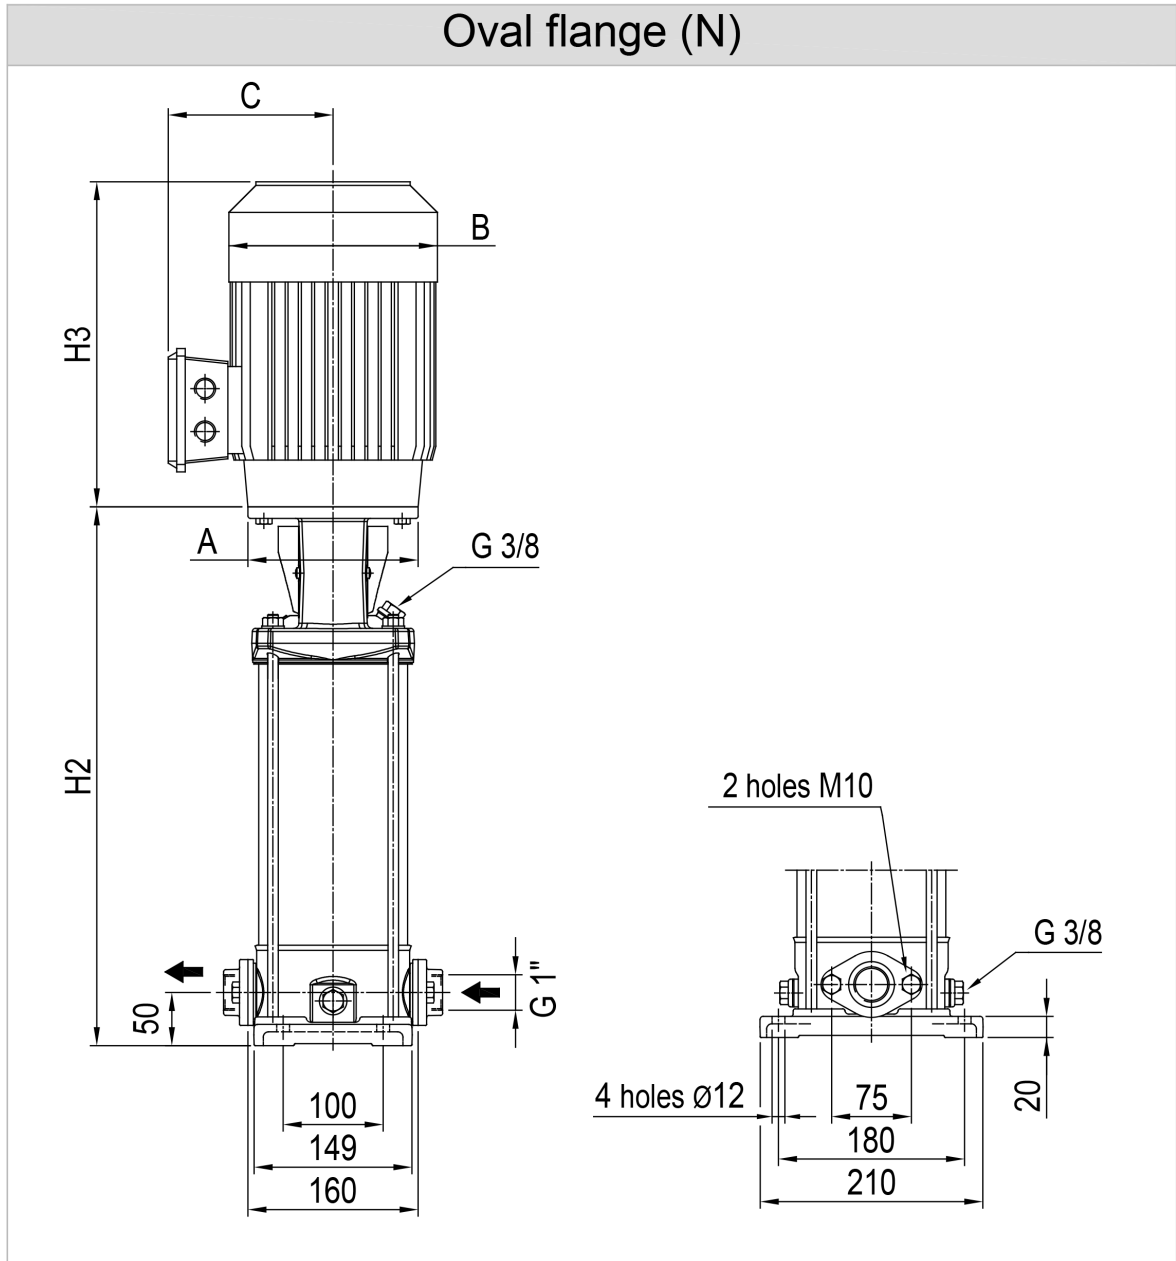


| Dimensions in | | mm | | | | | |
|---------------|-----------------|--------|--|--|--|--|--|
| 1 | A | Dia120 | | | | | |
| 2 | B | 141 | | | | | |
| 3 | C | 102 | | | | | |
| 4 | H2 | 512 | | | | | |
| 5 | H3 | 233 | | | | | |
| 6 | Weight P&M (kg) | 24.2 | | | | | |
| 7 | | | | | | | |
| 8 | | | | | | | |
| 9 | | | | | | | |
| 10 | | | | | | | |
| 11 | | | | | | | |
| 12 | | | | | | | |
| 13 | | | | | | | |
| 14 | | | | | | | |
| 15 | | | | | | | |

(1/4)

Construction

Pump name EVMS1 14N5Q1BEGE/0.75

| | | |
|----------|-----------------|-----------|
| Customer | Date 2022-04-19 | Company |
| Contact | Item no. | Issued by |
| Phone | Project | Phone |
| E-mail | Project ID | E-mail |

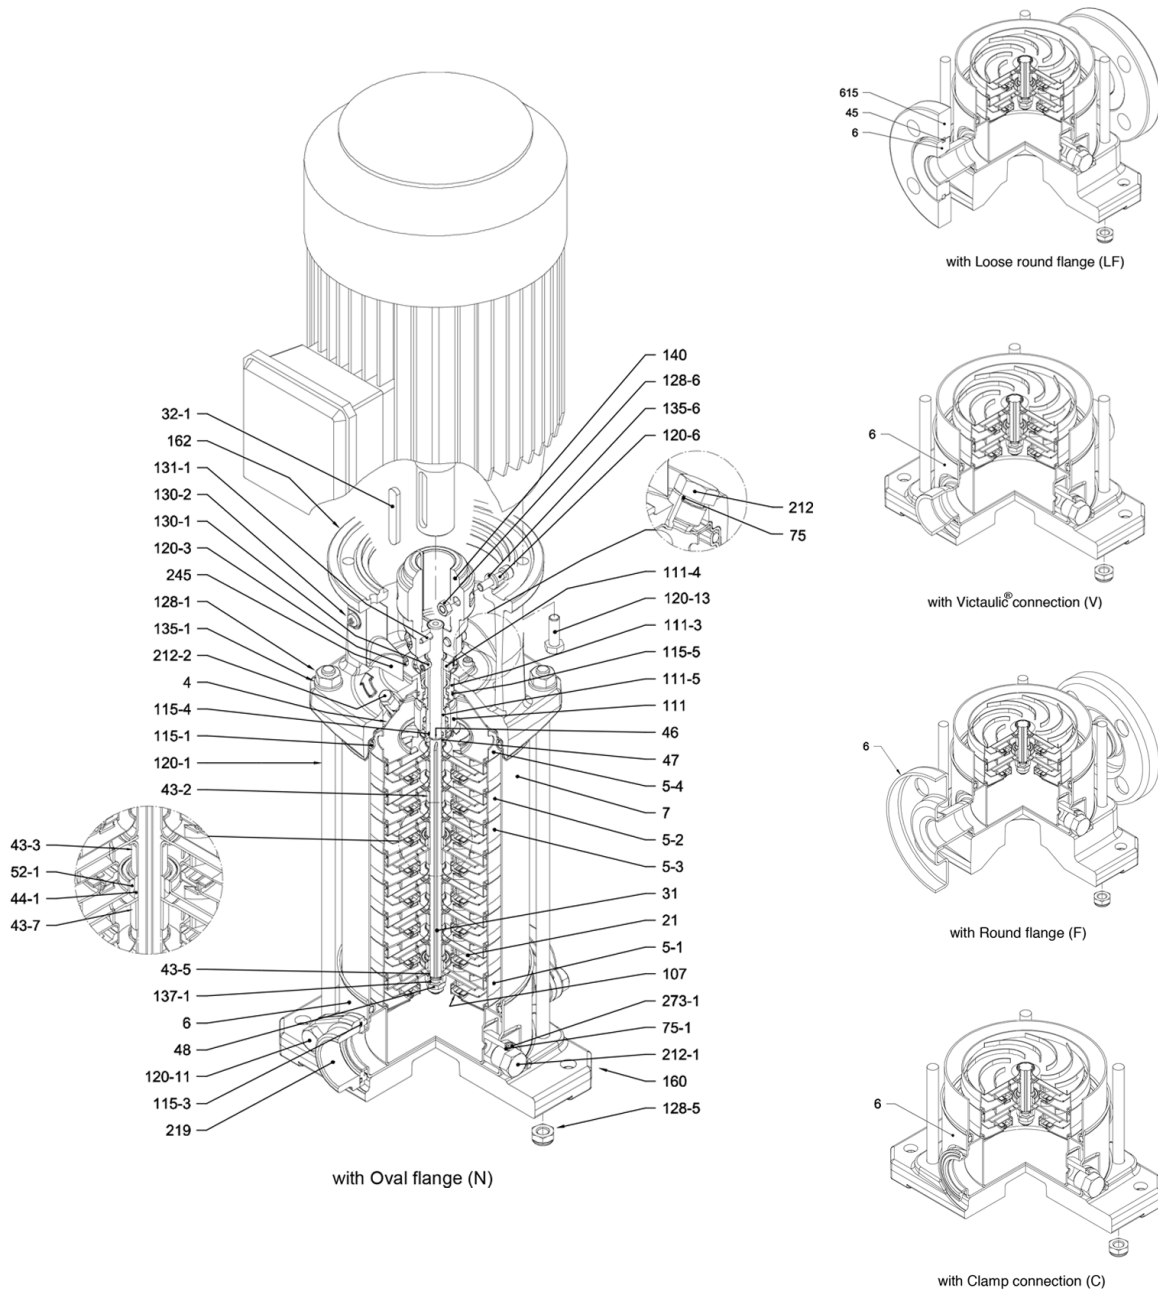

(2/4)**Construction****Pump name EVMS1 14N5Q1BEGE/0.75**

| | | | |
|----------|------------|------------|-----------|
| Customer | Date | 2022-04-19 | Company |
| Contact | Item no. | | Issued by |
| Phone | Project | | Phone |
| E-mail | Project ID | | E-mail |

| N° | PART NAME | MATERIAL | | DIMENSIONS | STANDARD |
|--------|----------------------------------|--|---|----------------|----------------------|
| | | EVMS | EVMSL | | |
| 4 | Casing cover | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 5-1 | Suction casing | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 5-2 | Intermediate casing | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 5-3 | Intermediate casing with bearing | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 5-4 | Discharge casing | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 6 | Bottom casing | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 7 | Outer casing | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 21 | Impeller | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 31 | Shaft | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 32-1 | Adjuster key | EN 1.4301 (AISI 304) | | | |
| 43-2 | Shaft sleeve (intermediate) | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 43-3 | Shaft sleeve (bearing) | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 43-5 | Shaft sleeve (last stage) | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 43-7 | Spacer | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 44-1 | Shaft sleeve bearing | Tungsten carbide | | | |
| 45 | Flange holder | EN 1.4301 (AISI 304) | | | |
| 46 | Ring (mechanical seal) | EN 1.4404 (AISI 316L) | | | |
| 47 | Ring holder | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 48 | Impeller nut | EN 1.4301 (AISI 304) with inox insert | EN 1.4401 (AISI 316) with inox insert | M8 | |
| 52-1 | Sleeve bearing | Tungsten carbide | | | |
| 75 | O-Ring (priming plug) | EPDM / FPM * | | Ø12.37x2.62 | OR 3050 |
| 75-1 | O-Ring (drainage plug) | EPDM / FPM * | | | |
| 107 | Liner ring | EN 1.4301 (AISI 304) + PPS | EN 1.4404 (AISI 316L) + PPS | | |
| 111 | Mechanical seal | - - - ** | | | |
| 111-3 | Mechanical seal seat | EN 1.4301 (AISI 304) | EN 1.4401 (AISI 316) | | |
| 111-4 | Seal holder | EN 1.4301 (AISI 304) | | | |
| 111-5 | Mechanical seal cartridge sleeve | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 115-1 | O-Ring (outer casing) | EPDM / FPM * | | Ø129.54x5.34 | OR 6945 |
| 115-3 | O-Ring | EPDM / FPM * | | | |
| 115-4 | O-Ring (cartridge sleeve) | EPDM / FPM * | | Ø11.91x2.62 | OR 4093 |
| 115-5 | O-Ring (seal flange) | EPDM / FPM * | | Ø32.99x2.62 | OR 4175 |
| 120-1 | Tie-rod | EN 1.4057 (AISI 431) | | M10 | |
| 120-3 | Screw (seal flange) | A2-70 | | M4x10 | ISO 4762 |
| 120-6 | Screw (pump coupling) | Galvanized steel | | M6x25 | ISO 4762 |
| 120-11 | Screw (counterflange) | A2-70 | | | |
| 120-13 | Screw for motor | MEC 71-80 MEC 90 | Galvanized steel 8.8 strength class ISO 898/1 | M6x20 M8x20 | ISO 4017 ISO 4017 |
| 128-1 | Nut (tie rod) | A2-70 | | M10 | ISO 4032 |
| 128-5 | Nut (tie rod) | A2-70 | | M10 | UNI 7474 |
| 128-6 | Nut (aluminium coupling) | MEC 71-80-90-100-112 | Galvanized steel | M6 | ISO 4032 |
| 130-1 | Set screw | EN 1.4301 (AISI 304) | | M5x8 | ISO 4026 |
| 130-2 | Screw for coupling guard | A2-70 | | M5x6 | UNI 7687 |
| 131-1 | Pin for shaft | Carbon Steel | | Ø4x32 | ISO 2338 |
| 135-1 | Washer (tie rod) | EN 1.4301 (AISI 304) | | Ø10.5x21x2 | ISO 7089 |
| 135-6 | Washer (aluminium coupling) | up to 4.0 kW | Carbon Steel | Ø6 | |
| 137-1 | Impeller spacer | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 140 | Coupling | up to 4.0 kW | Die cast Aluminium EN AB-AISI11Cu2 (Fe) | | |
| 160 | Base | Die cast Aluminium EN AB-AISI11Cu2 (Fe) | | | |
| 162 | Motor bracket | Cast iron EN-GJL-250 | | | |
| 212 | Priming plug | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | G 3/8 | |
| 212-1 | Drainage plug | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | G 3/8 | |
| 212-2 | Venting plug | EN 1.4404 (AISI 316L) | | | |
| 219 | Counter flange | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 245 | Coupling guard | EN 1.4301 (AISI 304) | | | |
| 273-1 | Washer (drainage plug) | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) | | |
| 615 | Flange | Nodular Cast Iron | | | |

* EPDM (standard)
FPM (option)

** see CONSTRUCTION 4/4

(3/4)

Construction

Pump name EVMS1 14N5Q1BEGE/0.75

| | | | |
|----------|------------|------------|-----------|
| Customer | Date | 2022-04-19 | Company |
| Contact | Item no. | | Issued by |
| Phone | Project | | Phone |
| E-mail | Project ID | | E-mail |

| Pump Type | N° | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------|----|-----|-----|-----|-----|---|---|----|----|------|------|------|------|------|------|------|----|----|----|------|----|------|-----|-----|-------|-------|-------|-------|--------|-------|-------|
| | 4 | 5-1 | 5-2 | 5-3 | 5-4 | 6 | 7 | 21 | 31 | 32-1 | 43-2 | 43-3 | 43-5 | 43-7 | 44-1 | 45** | 46 | 47 | 48 | 52-1 | 75 | 75-1 | 107 | 111 | 111-3 | 111-4 | 111-5 | 115-1 | 115-3* | 115-4 | 115-5 |
| EVMS(L)1 2/0.37 | 1 | 1 | / | 1 | 1 | 1 | 1 | 2 | 1 | 1 | 1 | 1 | / | / | 1 | 4 | 2 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 3/0.37 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 3 | 1 | 1 | 3 | 1 | / | / | 1 | 4 | 2 | 1 | 1 | 1 | 1 | 2 | 3 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 4/0.37 | 1 | 1 | 2 | 1 | 1 | 1 | 1 | 4 | 1 | 1 | 5 | 1 | / | / | 1 | 4 | 2 | 1 | 1 | 1 | 1 | 2 | 4 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 5/0.37 | 1 | 1 | 3 | 1 | 1 | 1 | 1 | 5 | 1 | 1 | 7 | 1 | 1 | / | / | 1 | 4 | 2 | 1 | 1 | 1 | 2 | 5 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 6/0.37 | 1 | 1 | 4 | 1 | 1 | 1 | 1 | 6 | 1 | 1 | 9 | 1 | / | / | 1 | 4 | 2 | 1 | 1 | 1 | 1 | 2 | 6 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 7/0.37 | 1 | 1 | 5 | 1 | 1 | 1 | 1 | 7 | 1 | 1 | 11 | 1 | / | / | 1 | 4 | 2 | 1 | 1 | 1 | 1 | 2 | 7 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 8/0.37 | 1 | 1 | 6 | 1 | 1 | 1 | 1 | 8 | 1 | 1 | 13 | 1 | / | / | 1 | 4 | 2 | 1 | 1 | 1 | 1 | 2 | 8 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 9/0.55 | 1 | 1 | 7 | 1 | 1 | 1 | 1 | 9 | 1 | 1 | 15 | 1 | 1 | / | / | 1 | 4 | 2 | 1 | 1 | 1 | 2 | 9 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 10/0.55 | 1 | 1 | 8 | 1 | 1 | 1 | 1 | 10 | 1 | 1 | 17 | 1 | / | / | 1 | 4 | 2 | 1 | 1 | 1 | 1 | 2 | 10 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 11/0.55 | 1 | 1 | 9 | 1 | 1 | 1 | 1 | 11 | 1 | 1 | 19 | 1 | / | / | 1 | 4 | 2 | 1 | 1 | 1 | 1 | 2 | 11 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 12/0.55 | 1 | 1 | 10 | 1 | 1 | 1 | 1 | 12 | 1 | 1 | 21 | 1 | / | / | 1 | 4 | 2 | 1 | 1 | 1 | 1 | 2 | 12 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 13/0.55 | 1 | 1 | 10 | 2 | 1 | 1 | 1 | 13 | 1 | 1 | 20 | 2 | 1 | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 13 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 14/0.75 | 1 | 1 | 11 | 2 | 1 | 1 | 1 | 14 | 1 | 1 | 22 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 14 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 16/0.75 | 1 | 1 | 13 | 2 | 1 | 1 | 1 | 16 | 1 | 1 | 26 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 16 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 18/1.1 | 1 | 1 | 15 | 2 | 1 | 1 | 1 | 18 | 1 | 1 | 30 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 18 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 20/1.1 | 1 | 1 | 17 | 2 | 1 | 1 | 1 | 20 | 1 | 1 | 34 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 20 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 22/1.1 | 1 | 1 | 19 | 2 | 1 | 1 | 1 | 22 | 1 | 1 | 38 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 22 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 24/1.1 | 1 | 1 | 21 | 2 | 1 | 1 | 1 | 24 | 1 | 1 | 42 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 24 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 26/1.1 | 1 | 1 | 23 | 2 | 1 | 1 | 1 | 26 | 1 | 1 | 46 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 26 | 1 | 1 | 1 | 1 | 2 | 2 | 1 | 1 |
| EVMS(L)1 27/1.5 | 1 | 1 | 24 | 2 | 1 | 1 | 1 | 27 | 1 | 1 | 48 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 27 | 1 | 1 | 1 | 1 | 2 | / | 1 | 1 |
| EVMS(L)1 29/1.5 | 1 | 1 | 26 | 2 | 1 | 1 | 1 | 29 | 1 | 1 | 52 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 29 | 1 | 1 | 1 | 1 | 2 | / | 1 | 1 |
| EVMS(L)1 32/1.5 | 1 | 1 | 29 | 2 | 1 | 1 | 1 | 32 | 1 | 1 | 58 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 32 | 1 | 1 | 1 | 1 | 2 | / | 1 | 1 |
| EVMS(L)1 34/1.5 | 1 | 1 | 31 | 2 | 1 | 1 | 1 | 34 | 1 | 1 | 62 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 34 | 1 | 1 | 1 | 1 | 2 | / | 1 | 1 |
| EVMS(L)1 37/2.2 | 1 | 1 | 34 | 2 | 1 | 1 | 1 | 37 | 1 | 1 | 68 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 37 | 1 | 1 | 1 | 1 | 2 | / | 1 | 1 |
| EVMS(L)1 39/2.2 | 1 | 1 | 36 | 2 | 1 | 1 | 1 | 39 | 1 | 1 | 72 | 2 | / | 1 | 2 | 4 | 2 | 1 | 1 | 2 | 1 | 2 | 39 | 1 | 1 | 1 | 1 | 2 | / | 1 | 1 |

| Pump Type | N° | | | | | | | | | | | | | | | | | | | | | | | |
|------------------|-------|-------|-------|---------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|-----|-----|-----|-------|-------|------|-----|-------|-------|
| | 120-1 | 120-3 | 120-6 | 120-11* | 120-13 | 128-1 | 128-5 | 128-6 | 130-1 | 130-2 | 131-1 | 135-1 | 135-6 | 137-1 | 140 | 160 | 162 | 212 | 212-1 | 212-2 | 219* | 245 | 273-1 | 615** |
| EVMS(L)1 2/0.37 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 3/0.37 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 4/0.37 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 5/0.37 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 6/0.37 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 7/0.37 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 8/0.37 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 9/0.55 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 10/0.55 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 11/0.55 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 12/0.55 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 13/0.55 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 14/0.75 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 16/0.75 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 18/1.1 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 20/1.1 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 22/1.1 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 24/1.1 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 26/1.1 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | 2 | 2 | 2 | 2 |
| EVMS(L)1 27/1.5 | 4 | 4 | 4 | / | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | / | 2 | 2 | 2 |
| EVMS(L)1 29/1.5 | 4 | 4 | 4 | / | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | / | 2 | 2 | 2 |
| EVMS(L)1 32/1.5 | 4 | 4 | 4 | / | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | / | 2 | 2 | 2 |
| EVMS(L)1 34/1.5 | 4 | 4 | 4 | / | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | / | 2 | 2 | 2 |
| EVMS(L)1 37/2.2 | 4 | 4 | 4 | / | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | / | 2 | 2 | 2 |
| EVMS(L)1 39/2.2 | 4 | 4 | 4 | / | 4 | 4 | 4 | 4 | 3 | 4 | 1 | 4 | 4 | 1 | 2 | 1 | 1 | 1 | 2 | 1 | / | 2 | 2 | 2 |

* only for Oval flange (N)


** only for Loose round flange (LF)

(4/4)

Construction

Pump name EVMS1 14N5Q1BEGE/0.75

| | | |
|----------|-----------------|-----------|
| Customer | Date 2022-04-19 | Company |
| Contact | Item no. | Issued by |
| Phone | Project | Phone |
| E-mail | Project ID | E-mail |

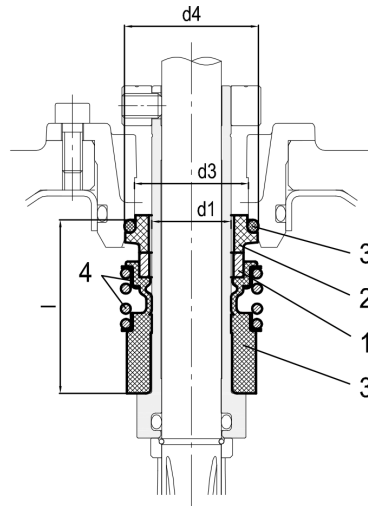

● : Standard

| Pump model | Max operating pressure | Max operating temperature | Shaft seal type | | Shaft seal material | | | | | | | Type key | | |
|--------------|------------------------|---------------------------|-----------------|----------|---------------------|------|-----------------|------|------------|------|--------------------|----------|------|-------|
| | | | Cartridge | | 1 | 2 | 3 | 4 | 5 | | | | | |
| | | | Unbalanced | Balanced | Rotating Part | Code | Stationary Part | Code | Elastomers | Code | Compression spring | Collar | Code | |
| up to 16 bar | - 30°C to + 120°C | | ● | | SiC | (Q1) | Carbon | (B) | EPDM | (E) | AISI 316 | | (G) | Q1BEG |

| Max operating pressure | d1 | d2 | d3 | d4 | l |
|------------------------|------|------|------|------|------|
| | [mm] | [mm] | [mm] | [mm] | [mm] |
| 16 bar | 16 | - | 23 | 27 | 35 |