

This isolating union makes it possible to check quickly and easily if a Flexcon expansion vessel is still working correctly (gas charge) or if it needs to be replaced.

Advantages


- Easy to assemble with the right tools; then just screw in the components by hand.
- Enable you to change the vessel without having to release pressure or drain the system.
- Saves a considerable amount of time when servicing a Flexcon vessel.

Technical Specifications

- Minimum/Maximum working temperature: -10 °C / 90 °C (continuous).
- Working pressure: 0 - 10 bar.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- Material: Brass.



Description	Flexfast 3/4	
Order Code	27920	
GTIN	08712874279209	
Model	<u>Flexfast 3/4</u>	
Connection	A	R $\frac{3}{4}$ "
	B	G $\frac{3}{4}$ " F
Dimension C [mm]	68	

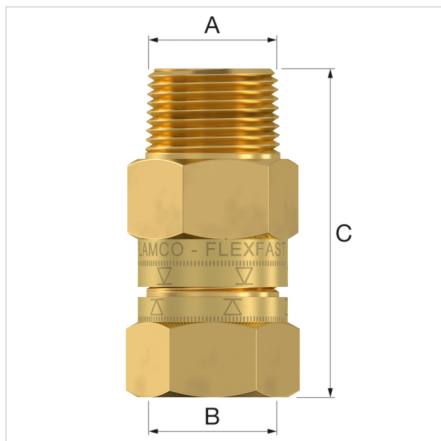

Classification General Data

Etim Group	Fittings, flanges and connectors
Etim Class	Self-sealing coupling
Product Name	Flexfast 3/4
Brand	Flamco
Product Type	3/4
Artikelnummer	27920

Attributes

Material	Brass
Nominal diameter	3/4 inch (20)
Outer pipe diameter connection 1	26.9 Millimetre
Connection 1	External thread conical BSPT-R (ISO 7-1 / EN 10226-1)
Outer pipe diameter connection 2	26.9 Millimetre
Connection 2	Internal thread cylindrical BSPP-G (ISO 228-1)
Decoupling	Wire
Double-sealing	No
Length	25 Millimetre

Find more information online:

[man.exp.flexcon.v050511.pdf](#)

[Flexfast ADSK](#)

[Flexfast DWG](#)

[Flexfast IPT](#)

[Flexfast STEP](#)

[Export catalogue](#)

[Packaging data](#)

Fort Blauwkapel 1
1358 DB, Almere - nl

T +31 (0)36 52 62 300
E info@aalberts-hfc.com
I flamcogroup.com