

More compact, lighter, cleaner and more efficient

For total elimination of air from heating and cooling installations. Air separators increase comfort and improve the yield. Air separators also offer benefits in the event of application in old systems or when an open system is converted to a closed system.

- Increases comfort and yield.
- The removal of air from the system water extends the service life of pumps, control equipment and other system accessories.



The Flamcovent Smart air separators remove even the smallest microbubbles from the system water. They are virtually maintenance-free and the flow resistance is negligibly low.

Advantages





- 60% better performance compared to conventional separators.
- Flow velocity up to 3 m/s.
- Can be used with all kinds of pipework.
- Compact dimensions, light weight.
- Extremely low flow resistance and low loss of energy.
- Consistent performance throughout its service life.

Technical Specifications

- Minimum/Maximum working temperature: -10 °C / 120 °C.
- Maximum working pressure: 10 bar.
- Suitable for addition of glycol-based anti-freeze up to 50%.

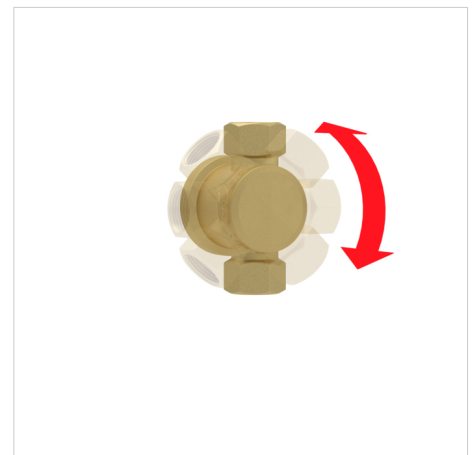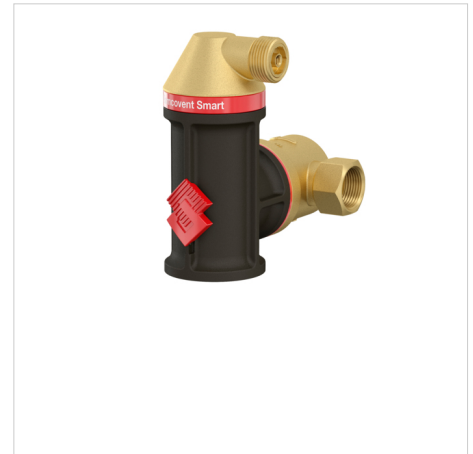

Description	Flamcovent Smart G1"F	
Order Code	30003	
GTIN	08712874300033	
Model	<u>Flamcovent Smart</u>	
Connection (E)	G 1" F	
Dimensions	A [mm]	82
	C [mm]	155
	D [mm]	106
	K [mm]	91
	L [mm]	139
	M [mm]	45
	H/H1 [mm]	192
	H2 [mm]	184
Ø N [mm]	75	
Weight [kg]	1.12	

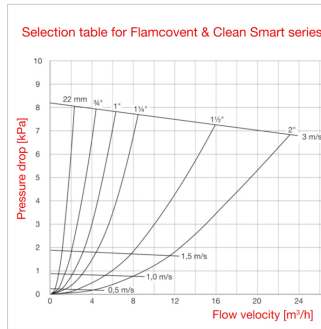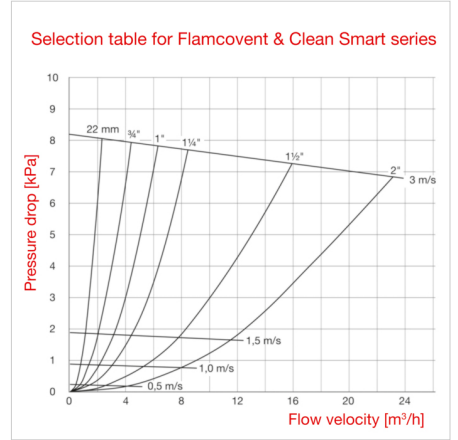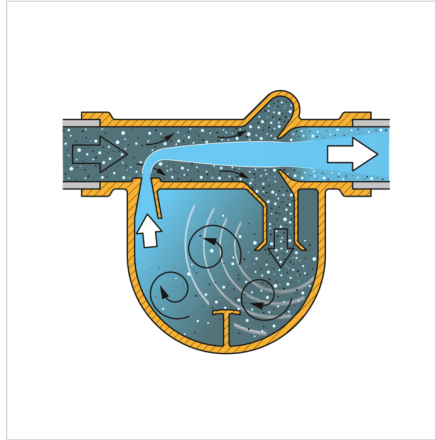

Classification General Data

Etim Group	Filters/separators
Etim Class	Air-/dirt separator for central heating/cooling system
Product Name	Flamcovent Smart G1"F
Brand	Flamco
Product Type	1

Attributes

Material	Plastic
Separator type	Air
Model	Horizontal/vertical
Suitable for heating	Yes
Suitable for cooling	Yes
Nominal inner diameter	1 inch (25)
Outer pipe diameter [mm]	33.7
Connection	Internal thread cylindrical BSPP-G (ISO 228-1)
Construction length [mm]	106
Article compression class	PN 10
Surface protection	Untreated
Operating principle	Other
Suitable for open system	No
With blow-off valve	Yes
Suitable for closed system	Yes
With dismountable filter	No
With automatic de-aerator	Yes
Max. medium temperature (continuous) [°C]	120
With integrated replenishment automat	No
With couplers	No
Inlet/outlet offset distance [mm]	0

Find more information online:
[Installation and operating instruction](#)
[Declaration of Conformity](#)
[Flamcovent Smart ADSK](#)
[Flamcovent Smart ADSK Revit](#)
[Flamcovent Smart DWG](#)
[Flamcovent Smart STEP](#)
[Export catalogue](#)
[Brochure](#)
[Specification Text](#)
[Packaging data](#)
[Flamcovent & Clean Smart](#)

[Installation and operating instruction](#)

[Declaration of Conformity](#)

[Flamcovent Smart ADSK](#)

[Flamcovent Smart ADSK Revit](#)

[Flamcovent Smart DWG](#)

[Flamcovent Smart STEP](#)

[Export catalogue](#)

[Brochure](#)

[Specification Text](#)

[Packaging data](#)

[Flamcovent & Clean Smart](#)

Washway Lane

UK-WA10 6PB, St Helens, Merseyside - gb

T +44 17 447 447 44

E uk.info@aalberts-hfc.com

I flamcogroup.com/uk-en