

# STUART

## Water Conditioner C

WRAS approved and designed to ensure limescale prevention in domestic properties, including water outlets and household appliances.

The Stuart range of Water Conditioners offer a solution to match the typical water flow from the cold water mains to the property and are simply installed in-line with the existing pipework and are completely maintenance free.



**10 YEAR  
GUARANTEE**



### Features

- Whole house water supply treatment
- Prevents limescale build up – maintains appliance efficiency
- Treated water is safe to drink
- Treated water can be stored for up to 3 months
- Compact design – easy to install in any orientation
- Environmentally friendly, does not use chemicals or salts
- Maintenance free – no ongoing costs
- No electrical power required
- 10 year guarantee
- Available in a range of sizes and flow rates

### Application

- Available in a range of sizes optimised to meet the flow rate requirements of residential properties
- Installed inline with the incoming mains water supply just after the stopcock
- Stuart Water Conditioner products can play an effective role in achieving compliance with Part L of the Building Regulations


## Product Selection

Model selection must be based upon actual measured flow and is essential for effective operation.

- 1) Measure the typical water flow demanded from the cold water mains supply.
- 2) Select the appropriate Water Conditioner product based on the stated optimum flow range\*.

Model	Water Conditioner 3-22 44617	Water Conditioner 23-45 44618	Water Conditioner 46-75 44619
Guarantee		10 year	
WRAS Approval		1606370	
Approvals		WRAS, CE	
Type	Catalytic	Catalytic	Catalytic
Optimum flow*	3-22 l/min	23-45 l/min	46-75 l/min
Maximum pressure		10 bar	
Housing		Stainless steel	
Connection type		Compression	
Connection Size	15/22 mm**	22 mm	28 mm
Typical noise		Silent	
Width	265 mm	290 mm	308 mm
Diameter	27 mm	34 mm	42 mm
Weight	0.8 Kg	1.0 Kg	1.5 Kg

\*\*Supplied with 22 mm compression fittings and 15 mm compression reducers

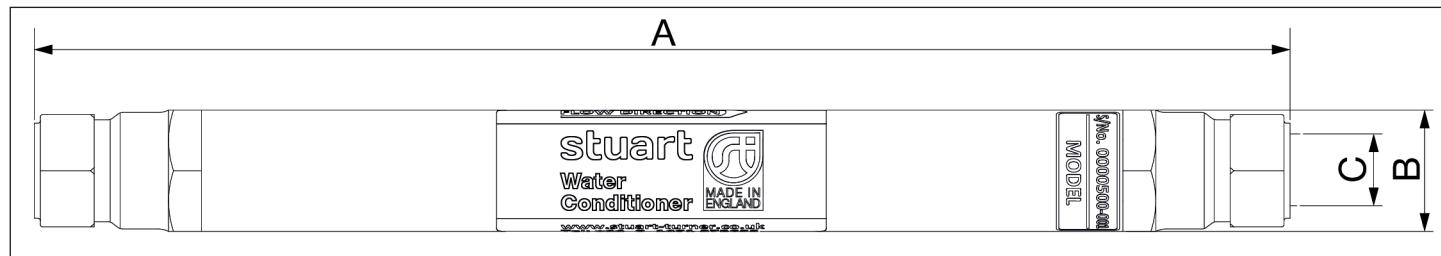

Model	Dim. 'A'	Dim. 'B'	Dim. 'C'
3-22	265 mm	27 mm	22 mm
23-45	290 mm	34 mm	22 mm
46-75	308 mm	42 mm	28 mm



Stuart Turner Limited reserves the right to amend specifications without notice.