



## **DOMESTIC FIXED SPEED-5HM03P-400V**

COMPONENT	MATERIAL
PUMP BODY	STAINLESS STEEL
IMPELLER	TECHNOPOLYMER NORYL
DIFFUSER	STAINLESS STEEL
SHAFT	STAINLESS STEEL
ADAPTER	ALUMINIUM
SEAL HOUSING	STAINLESS STEEL
FILL/DRAIN PLUGS	NICKEL-PLATED BRASS
WEAR RING	TECHNOPOLYMER
<b>BOLTS AND SCREWS</b>	STAINLESS STEEL





## **TECHNICAL DATA**

VOLTAGE	400 V	MAX PRESSURE	10 BAR
FREQUENCY	50 Hz	MAX TEMPERATURE	40 °C
POWER	0.5 kW	PROTECTION RATING	IP55
FLC	2.42 A	PART CODE	5050-5HM03P-FS/3

## **DIMENSIONS**

A	В	INLET/OUTPUT
490	610	DN32 FBSP

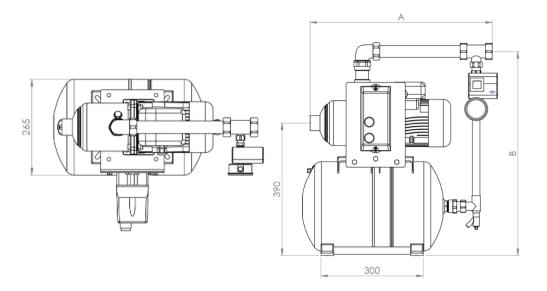



SPECIALITIES Pumps Booster Sets Pressurisation Heating Cold Water Heat Exchangers Service / Repair Pressure Vessels Pump Accessories





## **PERFORMANCE CURVE**

