

Qty.	Description
------	-------------

1	SL1.50.65 .09.E.2.50B
---	-----------------------



Note! Product picture may differ from actual product

Product No.: [96878451](#)

Non-self-priming, single-stage, centrifugal pump designed for handling wastewater, process water and unscreened raw sewage.

The pump is designed for intermittent and continuous operations in submerged installation. The revolutionary S-tube® impeller provides free spherical passage of solids up to 50 mm and is suitable for wastewater with a dry matter content of up to 3 %. A unique stainless-steel clamp assembling system enables quick and easy disassembly of the pump from the motor unit for service and inspection. No special tools are required. Pipework connection is via a DIN flange.

Further product details

The pump is suitable for both temporary and permanent installation either as free-standing on ring stand or on an auto-coupling system.

Pump

The pump housing, motor top and impeller are made of cast iron (EN-GJL-250).

All surfaces of the cast iron parts are protected with cathaphoresis coating.

The surface of the cast iron pump parts is afterwards painted with environmental friendly powder coating (type NCS 9000N (black), gloss code 30, thickness 100 µm) which ensures high impact and corrosion protection.

The final pump is assembled from already painted parts which ensures that no rust or scale can be formed in grooves between parts, etc.

The S-tube® impeller is providing free spherical passage through the impeller and pump housing and creates a natural extension of the pipework connected to the pump.

The S-tube® impeller is a wet-balanced and tube-shaped channel impeller placed in a pump housing that matches the smooth tube shape leaving no obstructions or dead zones.

The key to the S-tube® design is simplicity, with no cutting or moving functions that can get worn over time, thereby ensuring constant, superior efficiency. The simple design means lower life cycle costs because abrasive wear is reduced and there are fewer clogging incidents.





Qty.	Description																																						
1	The shaft seal consists of two mechanical seals that ensure a reliable sealing between the pumped liquid and motor. The shaft seals are incorporated in a single-unit cartridge shaft seal system that is easy to replace in the field without use of special tools. The combination of the primary and secondary seals in a cartridge shaft seal system results in a shorter assembly length compared to conventional shaft seals. - Primary seal: Silicon carbide/silicon carbide (SiC/SiC) - Secondary seal: Carbon/Ceramics The shaft seal is bidirectional, meaning it operates correctly in case of backflow through the pump.  The pump is approved according to EN 12050-2. Motor The motor is a watertight, totally encapsulated motor supplied with a 10 m power cable. The stainless steel plug is fastened with a union nut. This nut and the O-rings provide sealing against ingress of the liquid. The plug is polyurethane-embedded, ensuring a watertight and durable seal around the leads of the cable. This prevents the ingress of water into the motor through the cable in case of cable breakage or adverse handling in connection with installation or service. A compact motor construction with a short shaft reduces vibrations, resulting in an increased efficiency and lifetime of the shaft seal and ball bearings. The motor features built-in thermal protection to protect the motor against overheating and ensure the reliability. The pump is designed for speed-controlled operation to keep the energy consumption at a minimum. To avoid the risk of sedimentation in the pipes, we recommend that you operate the speed-controlled pump within a speed range of 30 % to 100 % and at a flow rate above 1 m/s. Controls: <table> <tr> <td>Moisture sensor:</td><td>without moisture sensors</td></tr> <tr> <td>Water-in-oil sensor:</td><td>without water-in-oil sensor</td></tr> <tr> <td>AUTOADAPT:</td><td>YES</td></tr> </table> Liquid: <table> <tr> <td>Liquid temperature range:</td><td>0 .. 40 °C</td></tr> <tr> <td>Density:</td><td>998.2 kg/m³</td></tr> </table> Technical: <table> <tr> <td>Maximum flow:</td><td>16.1 l/s</td></tr> <tr> <td>Type of impeller:</td><td>SINGLE CHANNEL</td></tr> <tr> <td>Maximum particle size:</td><td>50 mm</td></tr> <tr> <td>Primary shaft seal:</td><td>SIC/SIC</td></tr> <tr> <td>Approvals:</td><td>EN 12050-2</td></tr> <tr> <td>Curve tolerance:</td><td>ISO9906:2012 3B2</td></tr> <tr> <td>Rated speed:</td><td>2920 rpm</td></tr> </table> Materials: <table> <tr> <td>Pump housing:</td><td>Cast iron EN-JL-1030</td></tr> <tr> <td>Impeller:</td><td>Cast iron EN-GJS-500-7</td></tr> <tr> <td>Motor:</td><td>EN-GJL-200</td></tr> </table> Installation: <table> <tr> <td>Range of ambient temperature:</td><td>0 .. 40 °C</td></tr> <tr> <td>Maximum operating pressure:</td><td>6 bar</td></tr> <tr> <td>Flange standard:</td><td>DIN</td></tr> <tr> <td>Type of outlet connection:</td><td>DIN</td></tr> </table>	Moisture sensor:	without moisture sensors	Water-in-oil sensor:	without water-in-oil sensor	AUTOADAPT:	YES	Liquid temperature range:	0 .. 40 °C	Density:	998.2 kg/m ³	Maximum flow:	16.1 l/s	Type of impeller:	SINGLE CHANNEL	Maximum particle size:	50 mm	Primary shaft seal:	SIC/SIC	Approvals:	EN 12050-2	Curve tolerance:	ISO9906:2012 3B2	Rated speed:	2920 rpm	Pump housing:	Cast iron EN-JL-1030	Impeller:	Cast iron EN-GJS-500-7	Motor:	EN-GJL-200	Range of ambient temperature:	0 .. 40 °C	Maximum operating pressure:	6 bar	Flange standard:	DIN	Type of outlet connection:	DIN
Moisture sensor:	without moisture sensors																																						
Water-in-oil sensor:	without water-in-oil sensor																																						
AUTOADAPT:	YES																																						
Liquid temperature range:	0 .. 40 °C																																						
Density:	998.2 kg/m ³																																						
Maximum flow:	16.1 l/s																																						
Type of impeller:	SINGLE CHANNEL																																						
Maximum particle size:	50 mm																																						
Primary shaft seal:	SIC/SIC																																						
Approvals:	EN 12050-2																																						
Curve tolerance:	ISO9906:2012 3B2																																						
Rated speed:	2920 rpm																																						
Pump housing:	Cast iron EN-JL-1030																																						
Impeller:	Cast iron EN-GJS-500-7																																						
Motor:	EN-GJL-200																																						
Range of ambient temperature:	0 .. 40 °C																																						
Maximum operating pressure:	6 bar																																						
Flange standard:	DIN																																						
Type of outlet connection:	DIN																																						






Qty. Description

1	Size of outlet connection: DN 65 Pressure rating: PN 10 Maximum installation depth: 10 m Auto-coupling: 96090992 Frame range: A Electrical data: Power input - P1: 1.4 kW Rated power - P2: 0.9 kW Mains frequency: 50 Hz Rated voltage: 3 x 400-415 V Voltage tolerance: +6/-10 % Max starts per. hour: 30 Rated current: 2.8 A Rated current at 3/4 load: 2.5 A Rated current at 1/2 load: 2.1 A Starting current: 21 A Rated current at no load: 1.9 A Cos phi - power factor: 0.76 Cos phi - p.f. at 3/4 load: 0.68 Cos phi - p.f. at 1/2 load: 0.58 Rated speed: 2920 rpm Motor efficiency at full load: 65 % Motor efficiency at 3/4 load: 61 % Motor efficiency at 1/2 load: 58 % Number of poles: 2 Start. method: direct-on-line Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): F Explosion proof: no Length of power cable: 10 m Cable type: 07RN8-F Others: Net weight: 57.7 kg Danish VVS No.: 391295213 Swedish RSK No.: 5885979 Finnish LVI No.: 4836161 Norwegian NRF no.: 9045577
---	---

96878451 SL1.50.65 .09.E.2.50B 50 Hz

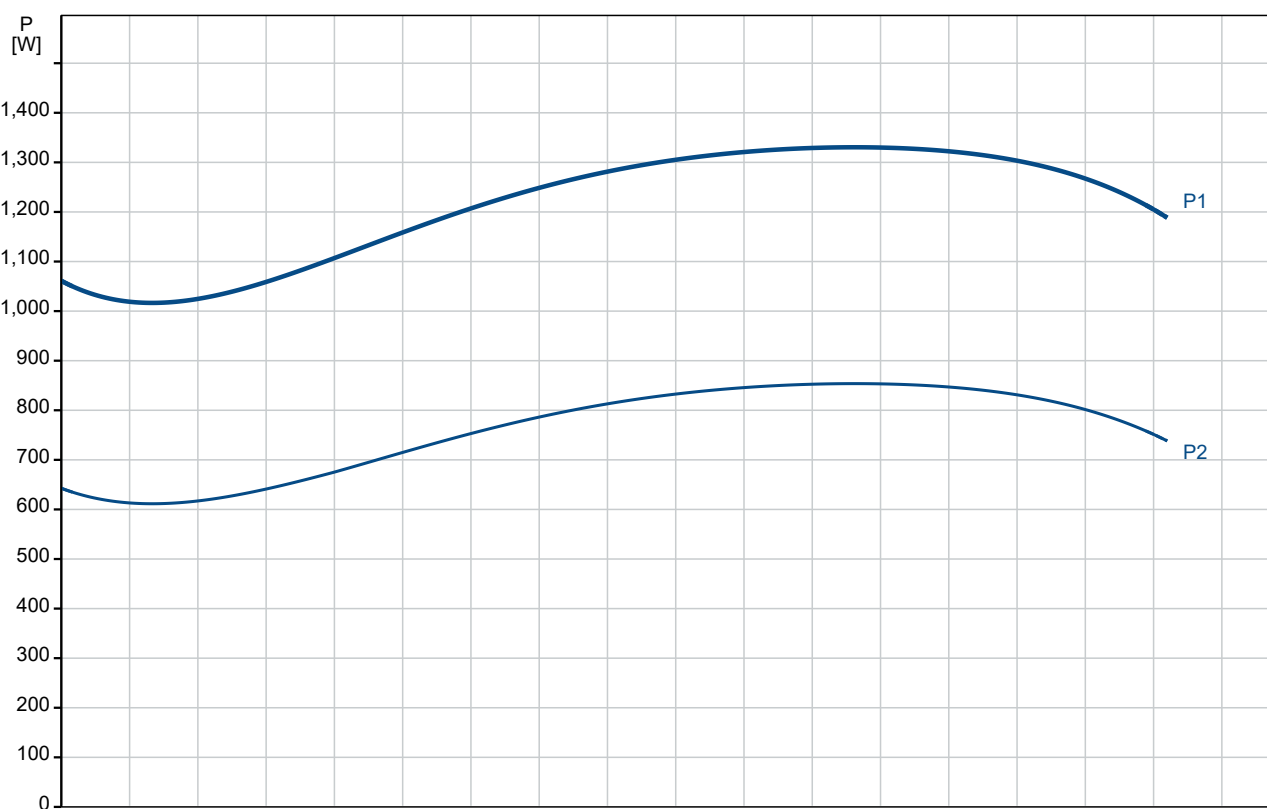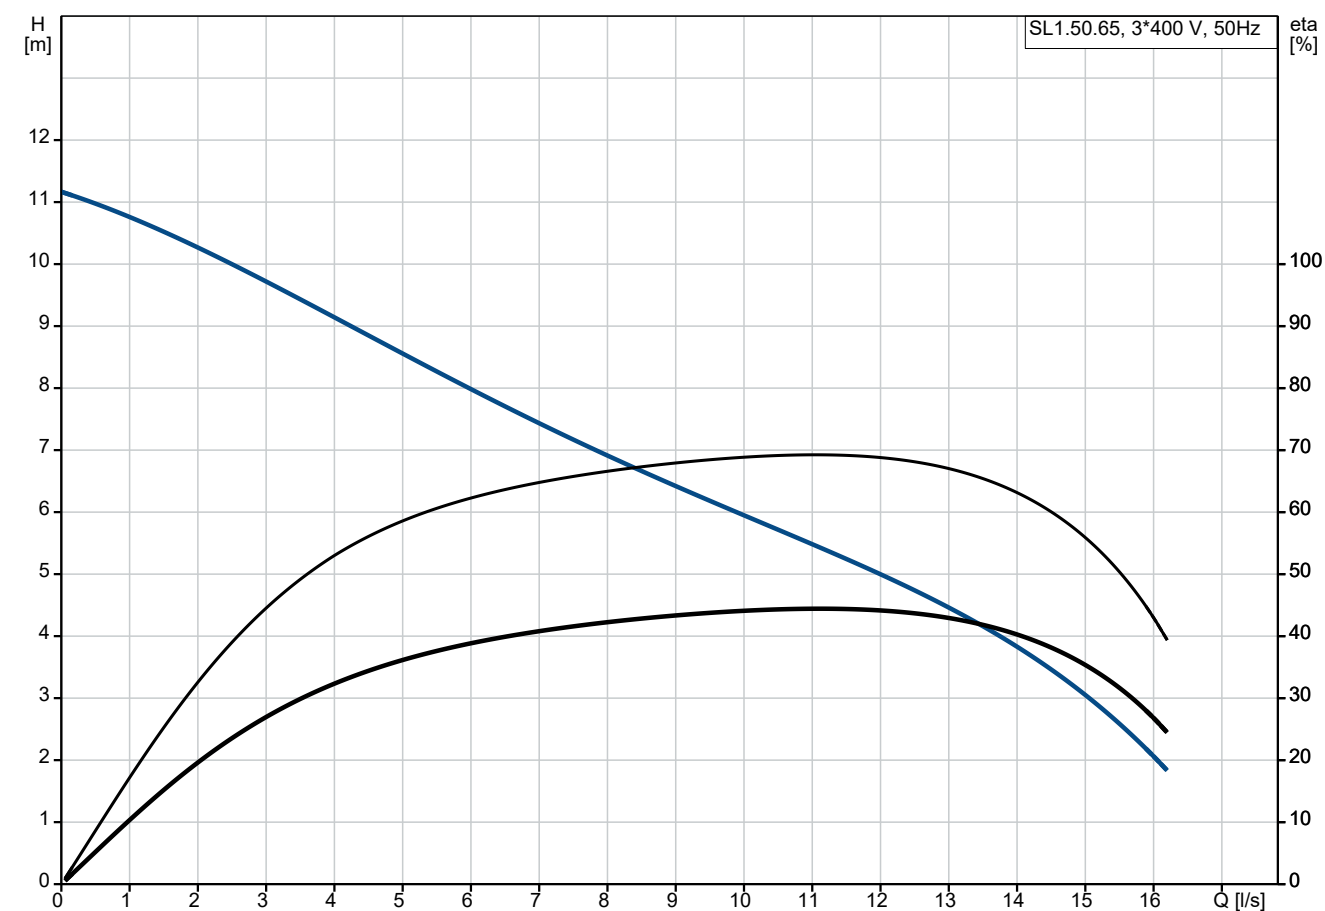

Description	Value
General information:	
Product name:	SL1.50.65 .09.E.2.50B
Product No:	96878451
EAN number:	5700312550297
Technical:	
Maximum flow:	16.1 l/s
Maximum head:	11.6 m
Type of impeller:	SINGLE CHANNEL
Maximum particle size:	50 mm
Primary shaft seal:	SIC/SIC
Approvals:	EN 12050-2
Curve tolerance:	ISO9906:2012 3B2
Cooling jacket:	without cooling jacket
Rated speed:	2920 rpm
Materials:	
Pump housing:	Cast iron
Pump housing:	EN-JL-1030
Impeller:	Cast iron
Impeller:	EN-GJS-500-7
Motor:	EN-GJL-200
Installation:	
Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	6 bar
Flange standard:	DIN
Type of outlet connection:	DIN
Size of outlet connection:	DN 65
Pressure rating:	PN 10
Maximum installation depth:	10 m
Inst dry/wet:	SUBMERGED
Installation:	Vertical
Auto-coupling:	96090992
Frame range:	A
Liquid:	
Liquid temperature range:	0 .. 40 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input - P1:	1.4 kW
Rated power - P2:	0.9 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 400-415 V
Voltage tolerance:	+6/-10 %
Max starts per. hour:	30
Rated current:	2.8 A
Rated current at 3/4 load:	2.5 A
Rated current at 1/2 load:	2.1 A
Starting current:	21 A
Rated current at no load:	1.9 A
Cos phi - power factor:	0.76
Cos phi - p.f. at 3/4 load:	0.68
Cos phi - p.f. at 1/2 load:	0.58
Rated speed:	2920 rpm
Motor efficiency at full load:	65 %
Motor efficiency at 3/4 load:	61 %
Motor efficiency at 1/2 load:	58 %
Number of poles:	2
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F

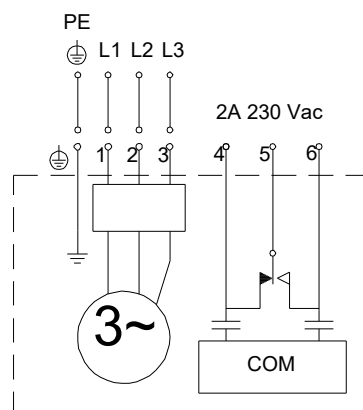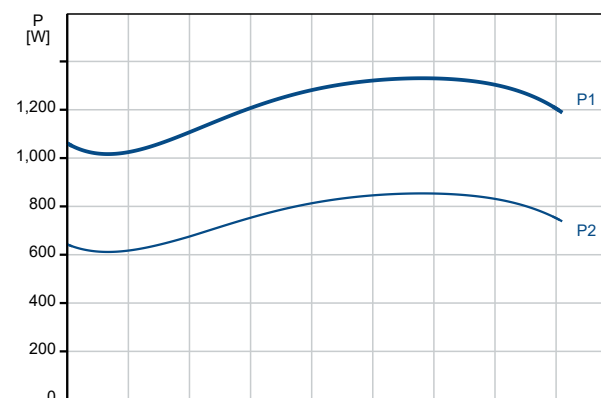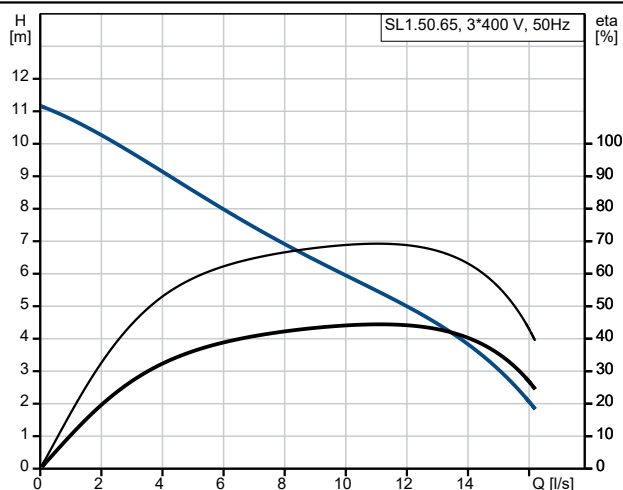



Company name:

Created by:


Phone:

Date:

28/12/2022


Description	Value
Explosion proof:	no
Built-in motor protection:	THERMAL SWITCH
Length of power cable:	10 m
Cable type:	07RN8-F
Controls:	
Control box:	not included
Moisture sensor:	without moisture sensors
Water-in-oil sensor:	without water-in-oil sensor
AUTOADAPT:	YES
Others:	
Net weight:	57.7 kg
Danish VVS No.:	391295213
Swedish RSK No.:	5885979
Finnish LVI No.:	4836161
Norwegian NRF no.:	9045577

96878451 SL1.50.65 .09.E.2.50B 50 Hz

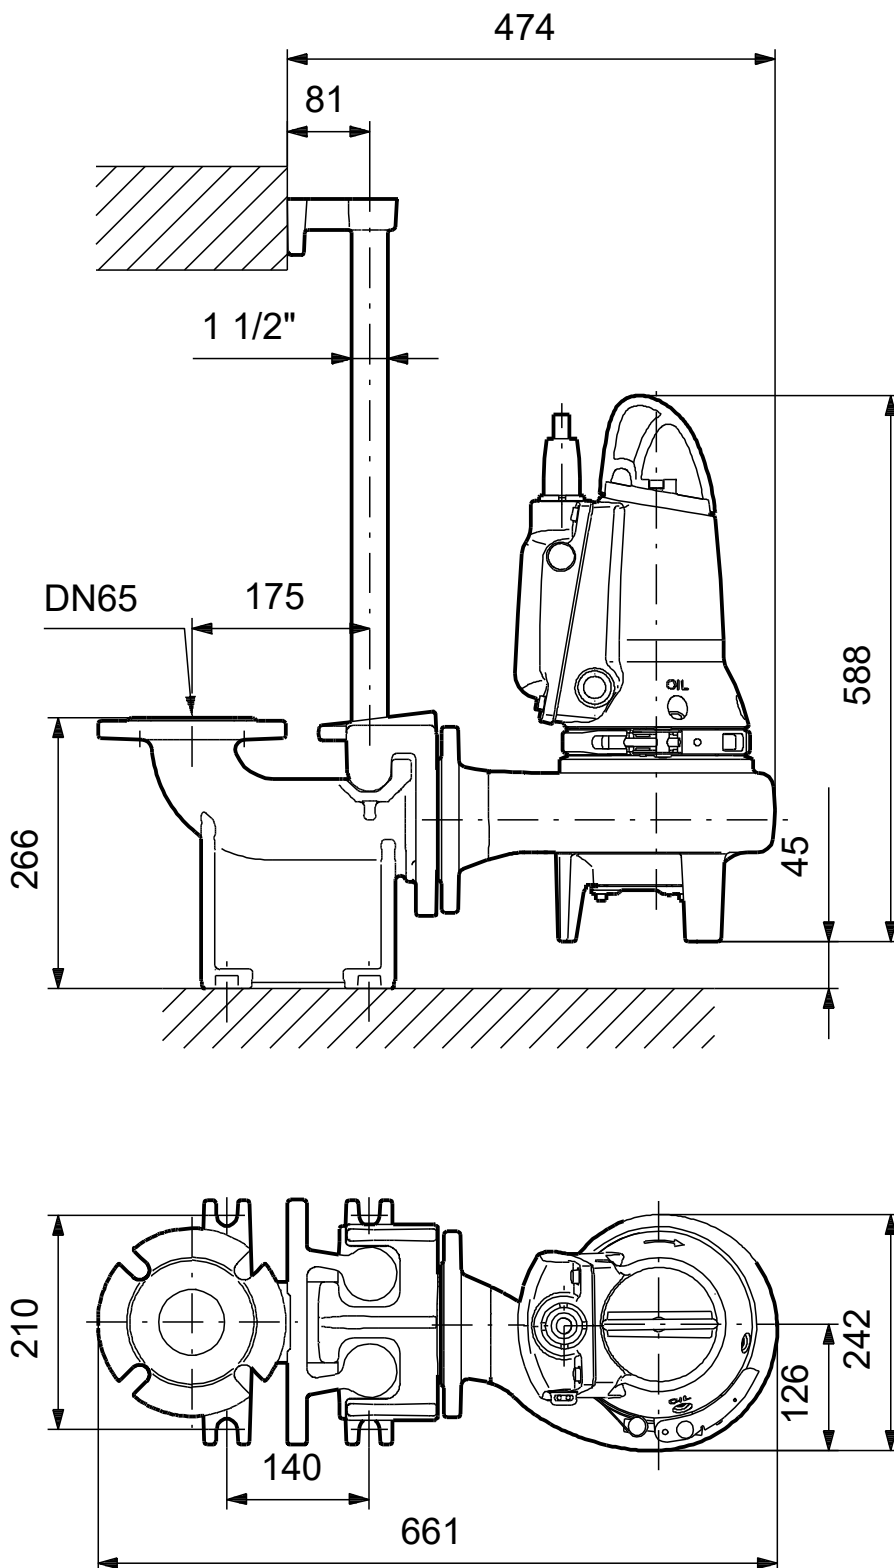

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.


96878451 SL1.50.65 .09.E.2.50B 50 Hz

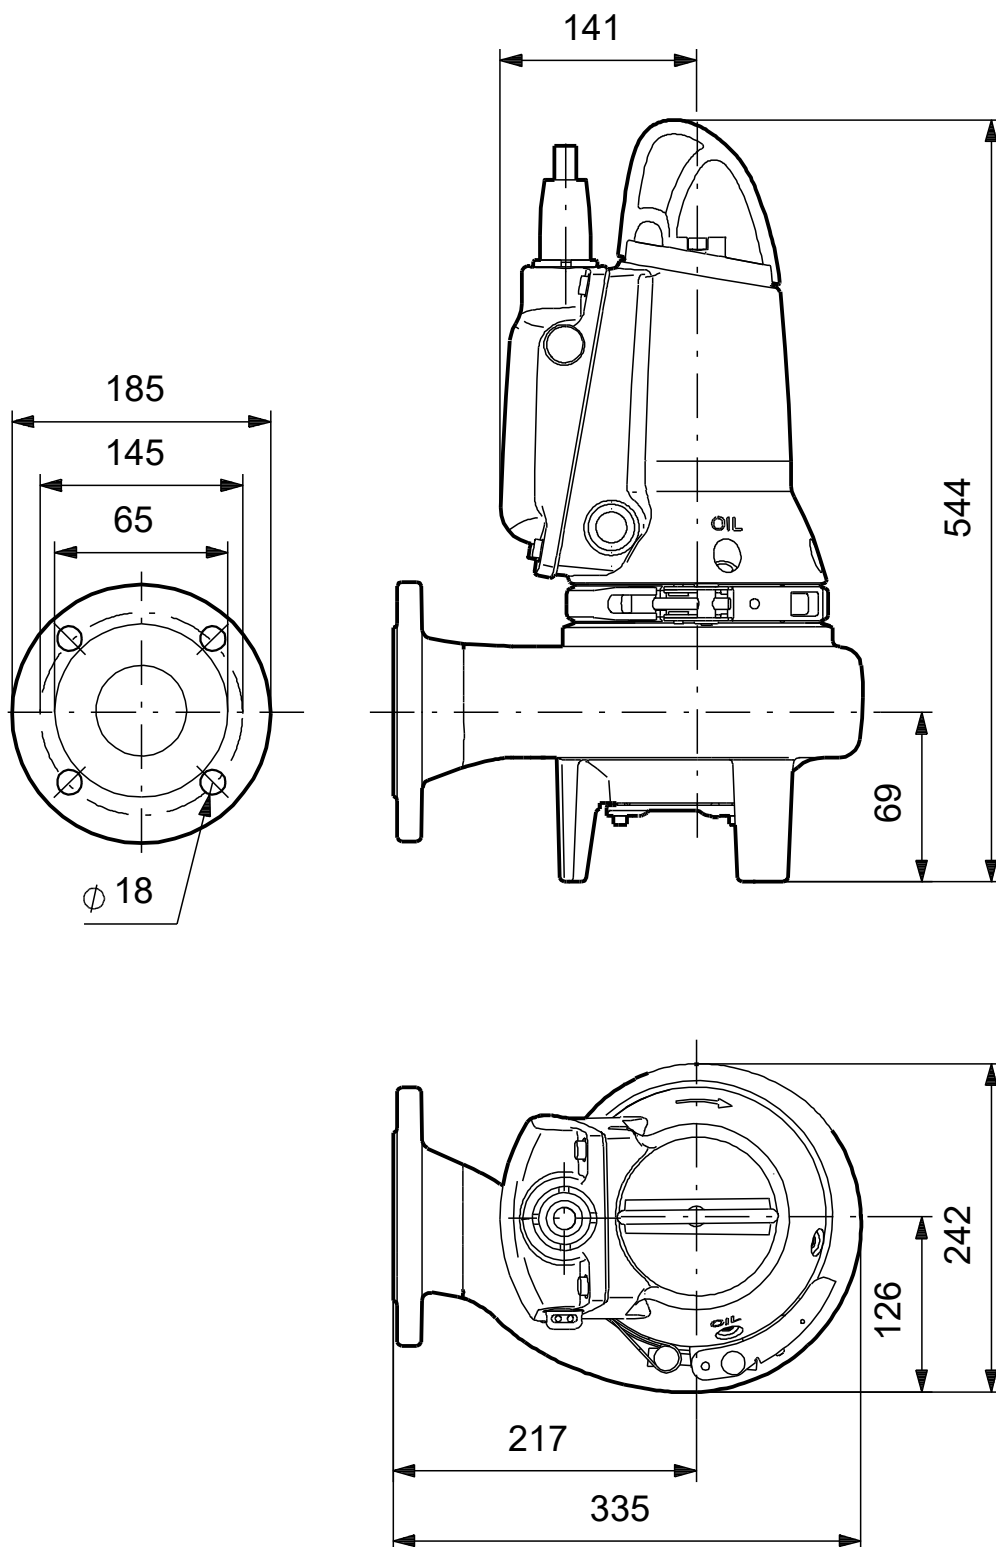

Note! All units are in [mm] unless others are stated.

Disclaimer: This simplified dimensional drawing does not show all details.

96878451 SL1.50.65 .09.E.2.50B 50 Hz

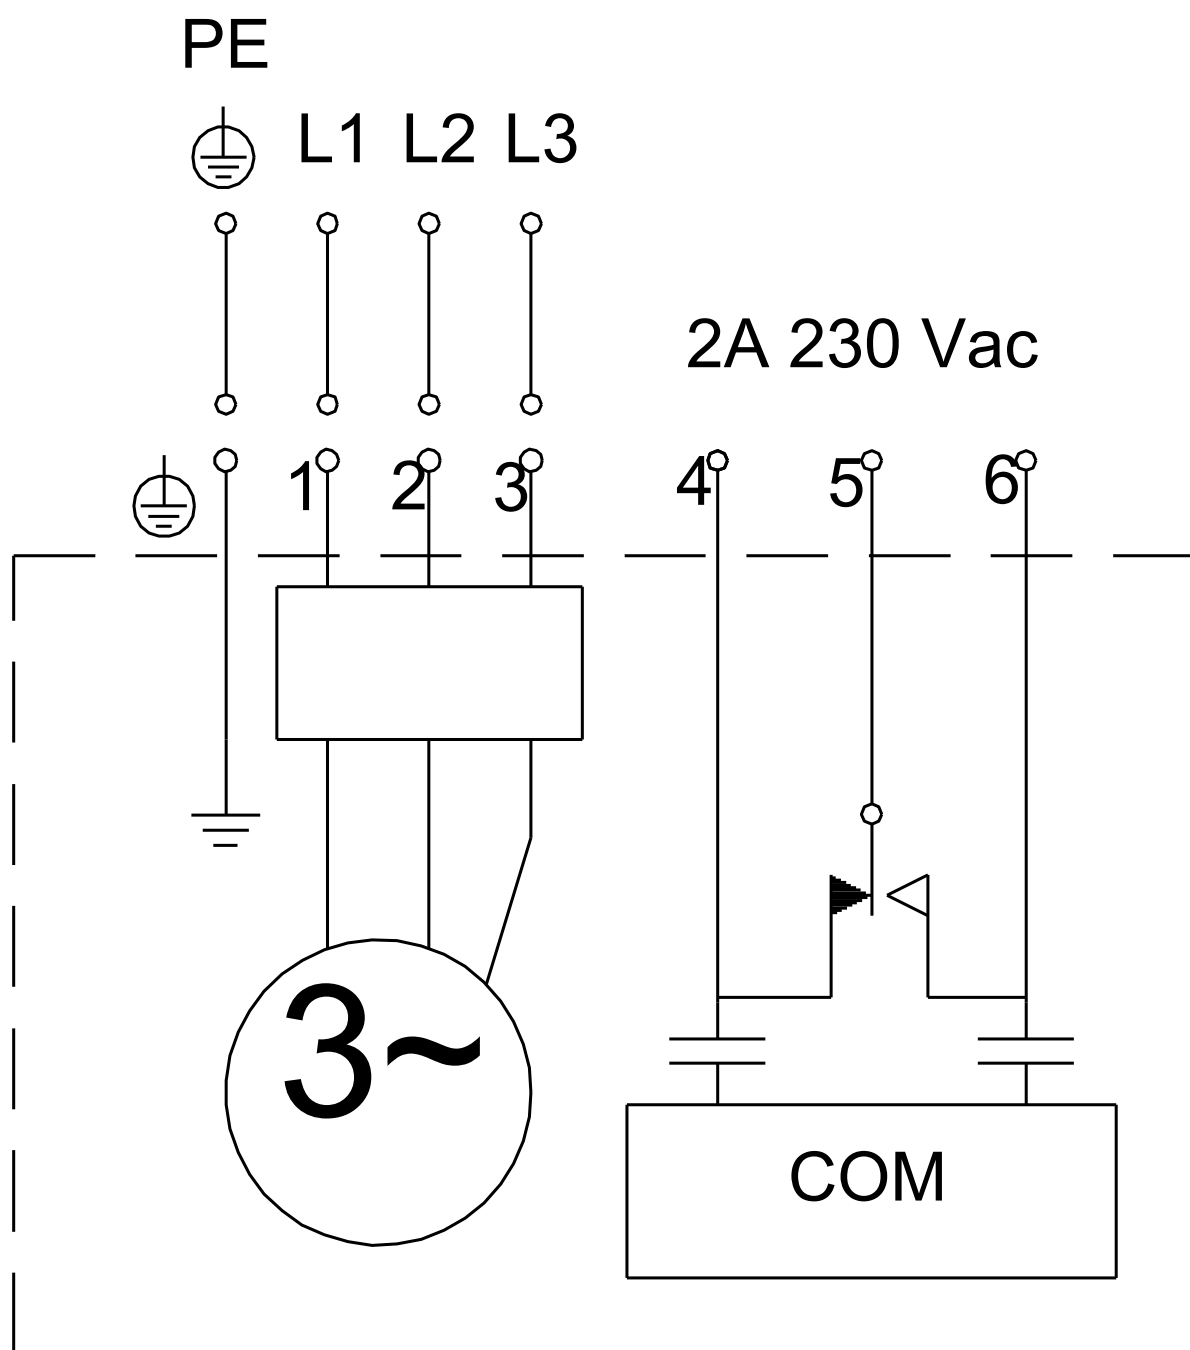

Note! All units are in [mm] unless others are stated.

28/12/2022

Order Data:

Position	Your pos.	Product name	Amount	Product No	Total
		SL1.50.65	1	96878451	Price on request