

Qty.	Description
1	SLV.80.100 .13.4.50D.C Note! Product picture may differ from actual product Product No.: 98625976 Non-self-priming, single-stage, centrifugal pump designed for handling wastewater, process water and unscreened raw sewage. The pump is designed for intermittent and continuous operations in submerged installation. The efficient SuperVortex impeller provides passage of long fibres and solids and is suitable for wastewater with a dry matter content of up to 5 %. A unique stainless-steel clamp assembling system enables quick and easy disassembly of the pump from the motor unit for service and inspection. No special tools are required. Pipework connection is via a DIN flange. Further product details The pump is suitable for both temporary and permanent installation either as free-standing on ring stand or on an auto-coupling system. Pump The pump housing, motor top and impeller are made of cast iron (EN-GJL-250). All surfaces of the cast iron parts are protected with cathodoresis coating. The surface of the cast iron pump parts is afterwards painted with environmental friendly powder coating (type NCS 9000N (black), gloss code 30, thickness 100 µm) which ensures high impact and corrosion protection. The final pump is assembled from already painted parts which ensures that no rust or scale can be formed in grooves between parts, etc. The SuperVortex impeller is a symmetrical multivane winglet impeller. The design ensures a flow entirely outside the impeller providing limited contact between the impeller and the pumped liquid. This ensures that long fibres, rags and more passes freely through the pump without getting caught and without causing clogging or jamming. The shaft seal consists of two mechanical seals that ensure a reliable sealing between the pumped liquid and motor. The shaft seals are incorporated in a single-unit cartridge shaft seal system that is easy to replace in the field without use of special tools. The combination of the primary and secondary seals in a cartridge shaft seal system results in a shorter assembly length compared to conventional shaft seals. - Primary seal: Silicon carbide/silicon carbide (SiC/SiC) - Secondary seal: Carbon/Ceramics The shaft seal is bidirectional, meaning it operates correctly in case of backflow through the pump.



Qty.	Description
------	-------------

1	 The pump is approved according to CE EN12050-1. Motor The motor is a watertight, totally encapsulated motor supplied with a 10 m power cable. The stainless steel plug is fastened with a union nut. This nut and the O-rings provide sealing against ingress of the liquid. The plug is polyurethane-embedded, ensuring a watertight and durable seal around the leads of the cable. This prevents the ingress of water into the motor through the cable in case of cable breakage or adverse handling in connection with installation or service. A compact motor construction with a short shaft reduces vibrations, resulting in an increased efficiency and lifetime of the shaft seal and ball bearings. The motor features built-in thermal protection to protect the motor against overheating and ensure the reliability. The pump is equipped with the following sensor(s): - A digital moisture switch that is fitted in the motor chamber monitors whether water enters the motor chamber. If moisture is detected in the motor chamber, the switch will trip and send a warning to the sensor module. The pump is designed for speed-controlled operation to keep the energy consumption at a minimum. To avoid the risk of sedimentation in the pipes, we recommend that you operate the speed-controlled pump within a speed range of 30 % to 100 % and at a flow rate above 1 m/s. Controls: <table> <tr> <td>Moisture sensor:</td> <td>with moisture sensors</td> </tr> <tr> <td>Water-in-oil sensor:</td> <td>without water-in-oil sensor</td> </tr> </table> Liquid: <table> <tr> <td>Liquid temperature range:</td> <td>10 .. 40 °C</td> </tr> <tr> <td>Density:</td> <td>998.2 kg/m³</td> </tr> </table> Technical: <table> <tr> <td>Maximum flow:</td> <td>18.3 l/s</td> </tr> <tr> <td>Type of impeller:</td> <td>SUPER VORTEX</td> </tr> <tr> <td>Maximum particle size:</td> <td>80 mm</td> </tr> <tr> <td>Primary shaft seal:</td> <td>SIC/SIC</td> </tr> <tr> <td>Approvals:</td> <td>CE EN12050-1</td> </tr> <tr> <td>Curve tolerance:</td> <td>ISO9906:2012 3B2</td> </tr> <tr> <td>Rated speed:</td> <td>1460 rpm</td> </tr> </table> Materials: <table> <tr> <td>Pump housing:</td> <td>Cast iron EN 5.1301 EN-GJL-250</td> </tr> <tr> <td>Impeller:</td> <td>Cast iron EN 5.1301 EN-GJL-250</td> </tr> <tr> <td>Motor:</td> <td>EN-GJL-250</td> </tr> </table> Installation: <table> <tr> <td>Range of ambient temperature:</td> <td>0 .. 40 °C</td> </tr> <tr> <td>Maximum operating pressure:</td> <td>6 bar</td> </tr> <tr> <td>Flange standard:</td> <td>DIN</td> </tr> <tr> <td>Type of inlet connection:</td> <td>DIN</td> </tr> <tr> <td>Type of outlet connection:</td> <td>DIN</td> </tr> <tr> <td>Size of inlet connection:</td> <td>DN 80</td> </tr> <tr> <td>Size of outlet connection:</td> <td>DN 100</td> </tr> <tr> <td>Pressure rating:</td> <td>PN 10</td> </tr> <tr> <td>Maximum installation depth:</td> <td>20 m</td> </tr> </table>	Moisture sensor:	with moisture sensors	Water-in-oil sensor:	without water-in-oil sensor	Liquid temperature range:	10 .. 40 °C	Density:	998.2 kg/m ³	Maximum flow:	18.3 l/s	Type of impeller:	SUPER VORTEX	Maximum particle size:	80 mm	Primary shaft seal:	SIC/SIC	Approvals:	CE EN12050-1	Curve tolerance:	ISO9906:2012 3B2	Rated speed:	1460 rpm	Pump housing:	Cast iron EN 5.1301 EN-GJL-250	Impeller:	Cast iron EN 5.1301 EN-GJL-250	Motor:	EN-GJL-250	Range of ambient temperature:	0 .. 40 °C	Maximum operating pressure:	6 bar	Flange standard:	DIN	Type of inlet connection:	DIN	Type of outlet connection:	DIN	Size of inlet connection:	DN 80	Size of outlet connection:	DN 100	Pressure rating:	PN 10	Maximum installation depth:	20 m
Moisture sensor:	with moisture sensors																																														
Water-in-oil sensor:	without water-in-oil sensor																																														
Liquid temperature range:	10 .. 40 °C																																														
Density:	998.2 kg/m ³																																														
Maximum flow:	18.3 l/s																																														
Type of impeller:	SUPER VORTEX																																														
Maximum particle size:	80 mm																																														
Primary shaft seal:	SIC/SIC																																														
Approvals:	CE EN12050-1																																														
Curve tolerance:	ISO9906:2012 3B2																																														
Rated speed:	1460 rpm																																														
Pump housing:	Cast iron EN 5.1301 EN-GJL-250																																														
Impeller:	Cast iron EN 5.1301 EN-GJL-250																																														
Motor:	EN-GJL-250																																														
Range of ambient temperature:	0 .. 40 °C																																														
Maximum operating pressure:	6 bar																																														
Flange standard:	DIN																																														
Type of inlet connection:	DIN																																														
Type of outlet connection:	DIN																																														
Size of inlet connection:	DN 80																																														
Size of outlet connection:	DN 100																																														
Pressure rating:	PN 10																																														
Maximum installation depth:	20 m																																														



The pump is approved according to CE EN12050-1.

Motor

The motor is a watertight, totally encapsulated motor supplied with a 10 m power cable. The stainless steel plug is fastened with a union nut. This nut and the O-rings provide sealing against ingress of the liquid.

The plug is polyurethane-embedded, ensuring a watertight and durable seal around the leads of the cable. This prevents the ingress of water into the motor through the cable in case of cable breakage or adverse handling in connection with installation or service.

A compact motor construction with a short shaft reduces vibrations, resulting in an increased efficiency and lifetime of the shaft seal and ball bearings.

The motor features built-in thermal protection to protect the motor against overheating and ensure the reliability.

The pump is equipped with the following sensor(s):

- A digital moisture switch that is fitted in the motor chamber monitors whether water enters the motor chamber. If moisture is detected in the motor chamber, the switch will trip and send a warning to the sensor module.

The pump is designed for speed-controlled operation to keep the energy consumption at a minimum.

To avoid the risk of sedimentation in the pipes, we recommend that you operate the speed-controlled pump within a speed range of 30 % to 100 % and at a flow rate above 1 m/s.

Controls:

Moisture sensor:	with moisture sensors
Water-in-oil sensor:	without water-in-oil sensor

Liquid:

Liquid temperature range:	10 .. 40 °C
Density:	998.2 kg/m ³

Technical:

Maximum flow:	18.3 l/s
Type of impeller:	SUPER VORTEX
Maximum particle size:	80 mm
Primary shaft seal:	SIC/SIC
Approvals:	CE EN12050-1
Curve tolerance:	ISO9906:2012 3B2
Rated speed:	1460 rpm

Materials:

Pump housing:	Cast iron EN 5.1301 EN-GJL-250
Impeller:	Cast iron EN 5.1301 EN-GJL-250
Motor:	EN-GJL-250

Installation:

Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	6 bar
Flange standard:	DIN
Type of inlet connection:	DIN
Type of outlet connection:	DIN
Size of inlet connection:	DN 80
Size of outlet connection:	DN 100
Pressure rating:	PN 10
Maximum installation depth:	20 m



Company name:

Created by:

Phone:


Date:

02/01/2023





Qty.	Description
------	-------------

1	Auto-coupling: 96090994 Frame range: B Electrical data: Power input - P1: 1.8 kW Rated power - P2: 1.3 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-415 V Voltage tolerance: +10/-10 % Max starts per. hour: 20 Rated current: 3.8 A Cos phi - power factor: 0.68 Cos phi - p.f. at 3/4 load: 0.59 Cos phi - p.f. at 1/2 load: 0.45 Rated speed: 1460 rpm Motor efficiency at full load: 84.2 % Motor efficiency at 3/4 load: 83.8 % Motor efficiency at 1/2 load: 81.1 % Number of poles: 4 Start. method: direct-on-line Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): H Explosion proof: no Length of power cable: 10 m Cable type: 07RN8-F Others: Net weight: 92.5 kg Danish VVS No.: 391298246 Country of origin: HU Custom tariff no.: 84137021
---	--

98625976 SLV.80.100 .13.4.50D.C 50 Hz

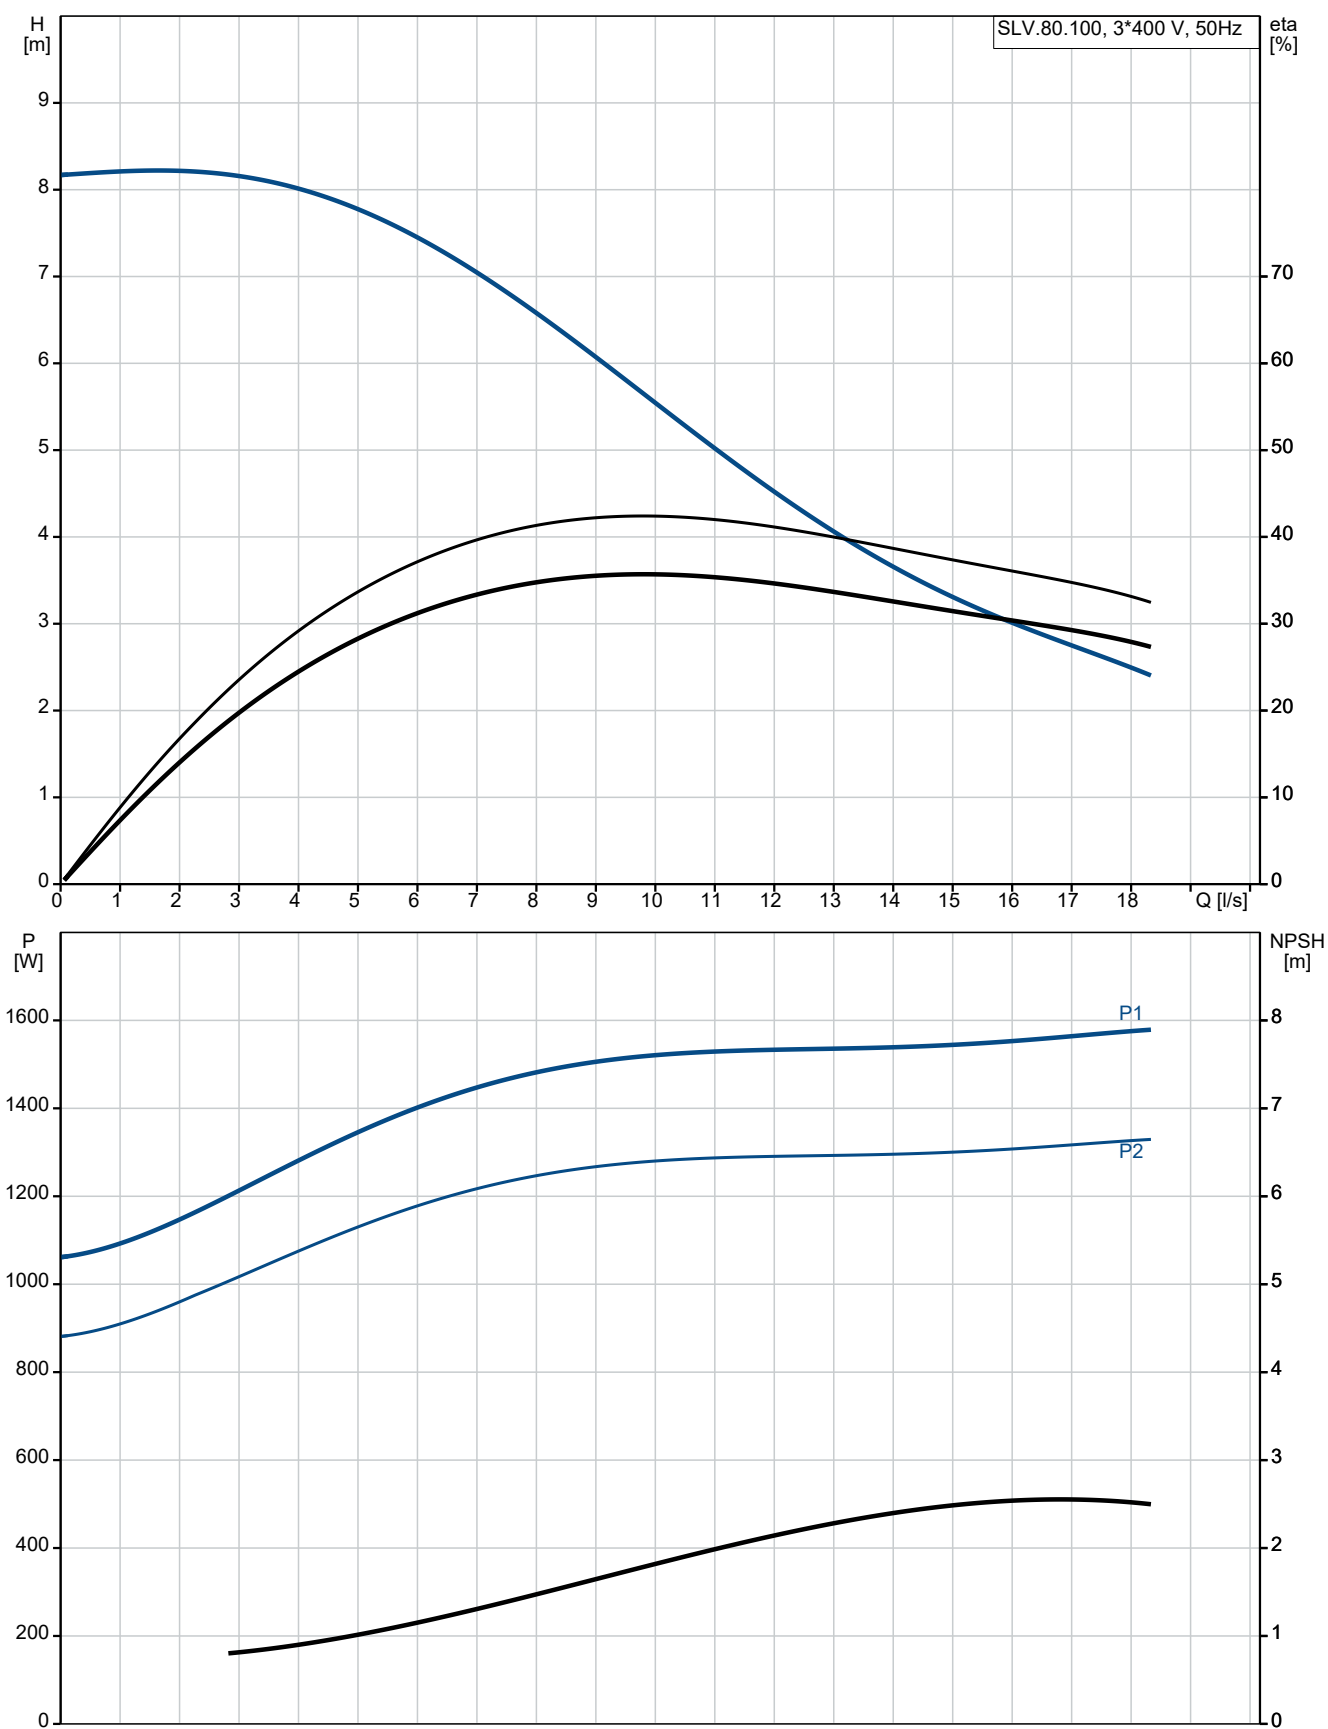

Description	Value
General information:	
Product name:	SLV.80.100.13.4.50D.C
Product No:	98625976
EAN number:	5711498463608
Technical:	
Maximum flow:	18.3 l/s
Maximum head:	9.2 m
Type of impeller:	SUPER VORTEX
Maximum particle size:	80 mm
Primary shaft seal:	SIC/SIC
Approvals:	CE EN12050-1
Curve tolerance:	ISO9906:2012 3B2
Cooling jacket:	without cooling jacket
Rated speed:	1460 rpm
Materials:	
Pump housing:	Cast iron
Pump housing:	EN 5.1301 EN-GJL-250
Impeller:	Cast iron
Impeller:	EN 5.1301 EN-GJL-250
Motor:	EN-GJL-250
Installation:	
Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	6 bar
Flange standard:	DIN
Type of inlet connection:	DIN
Type of outlet connection:	DIN
Size of inlet connection:	DN 80
Size of outlet connection:	DN 100
Pressure rating:	PN 10
Maximum installation depth:	20 m
Inst dry/wet:	SUBMERGED
Installation:	Vertical
Auto-coupling:	96090994
Frame range:	B
Liquid:	
Liquid temperature range:	10 .. 40 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input - P1:	1.8 kW
Rated power - P2:	1.3 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-415 V
Voltage tolerance:	+10/-10 %
Max starts per. hour:	20
Rated current:	3.8 A
Cos phi - power factor:	0.68
Cos phi - p.f. at 3/4 load:	0.59
Cos phi - p.f. at 1/2 load:	0.45
Rated speed:	1460 rpm
Motor efficiency at full load:	84.2 %
Motor efficiency at 3/4 load:	83.8 %
Motor efficiency at 1/2 load:	81.1 %
Number of poles:	4
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	H
Explosion proof:	no
Built-in motor protection:	THERMAL SWITCH

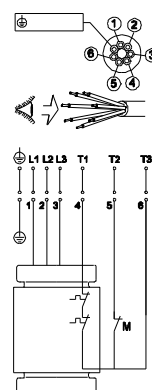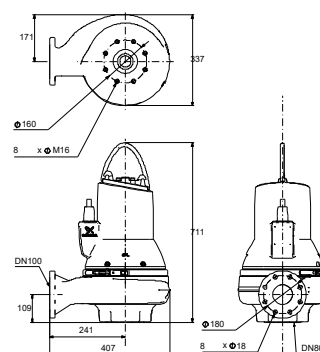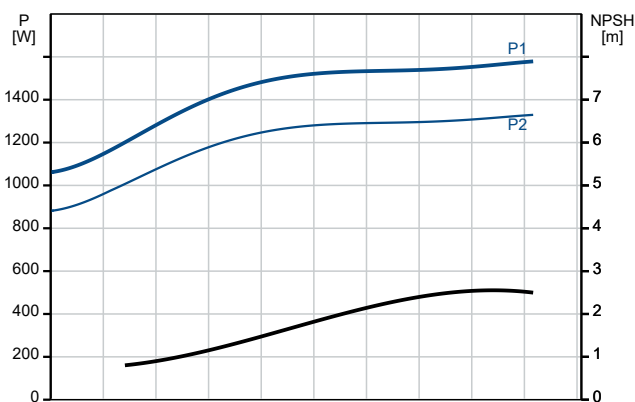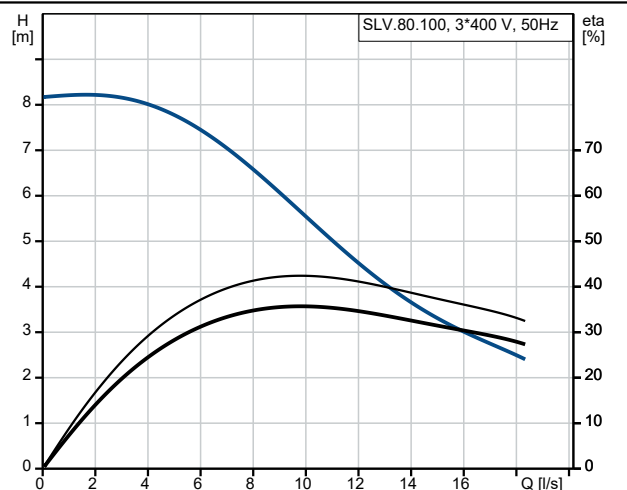



Company name:

Created by:


Phone:

Date:

02/01/2023


Description	Value
Length of power cable:	10 m
Cable type:	07RN8-F
Controls:	
Control box:	not included
Moisture sensor:	with moisture sensors
Water-in-oil sensor:	without water-in-oil sensor
Others:	
Net weight:	92.5 kg
Danish VVS No.:	391298246
Country of origin:	HU
Custom tariff no.:	84137021

98625976 SLV.80.100 .13.4.50D.C 50 Hz

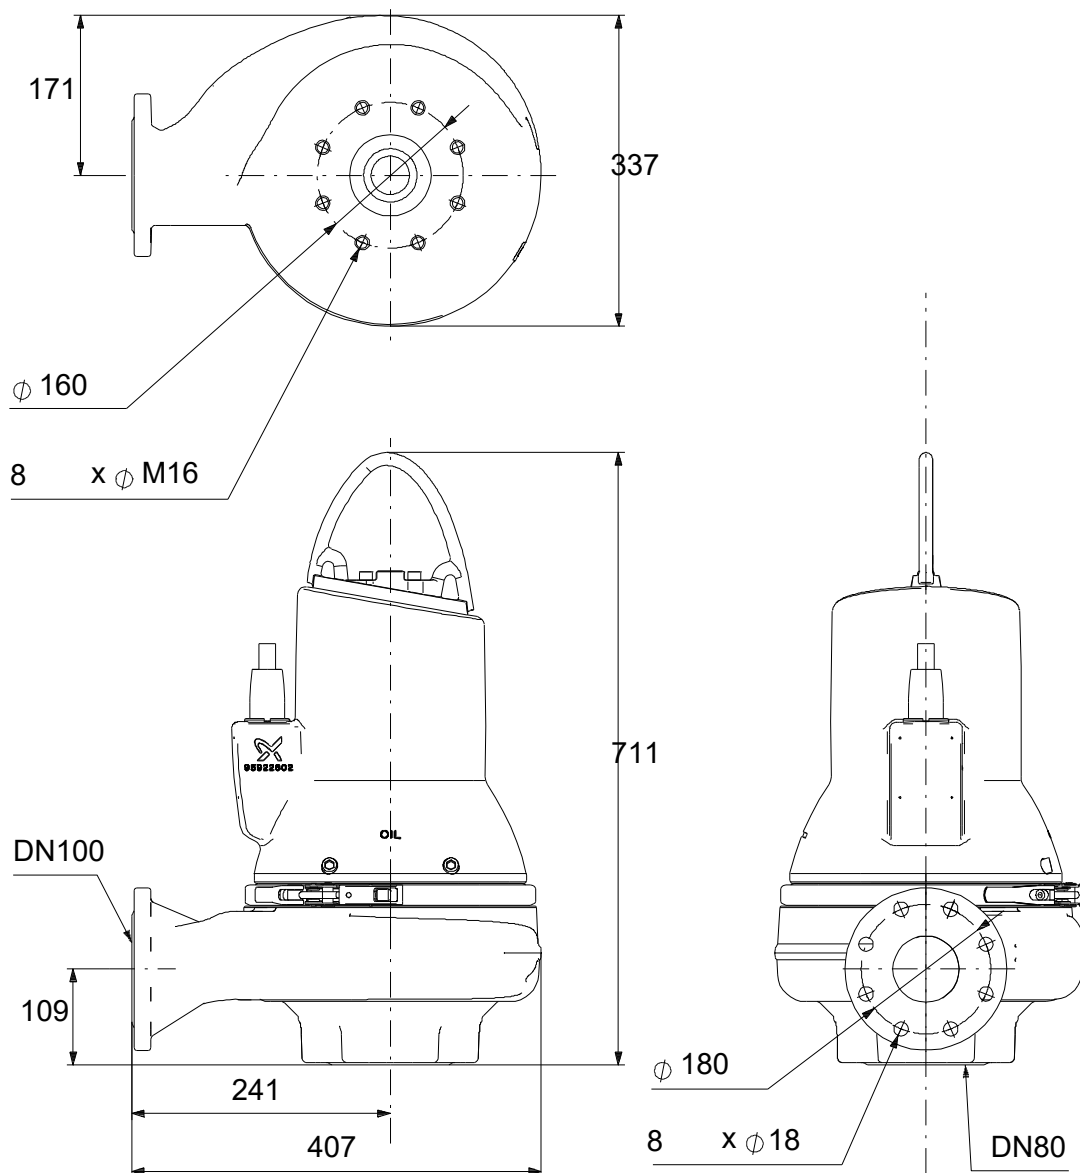

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.


98625976 SLV.80.100 .13.4.50D.C 50 Hz

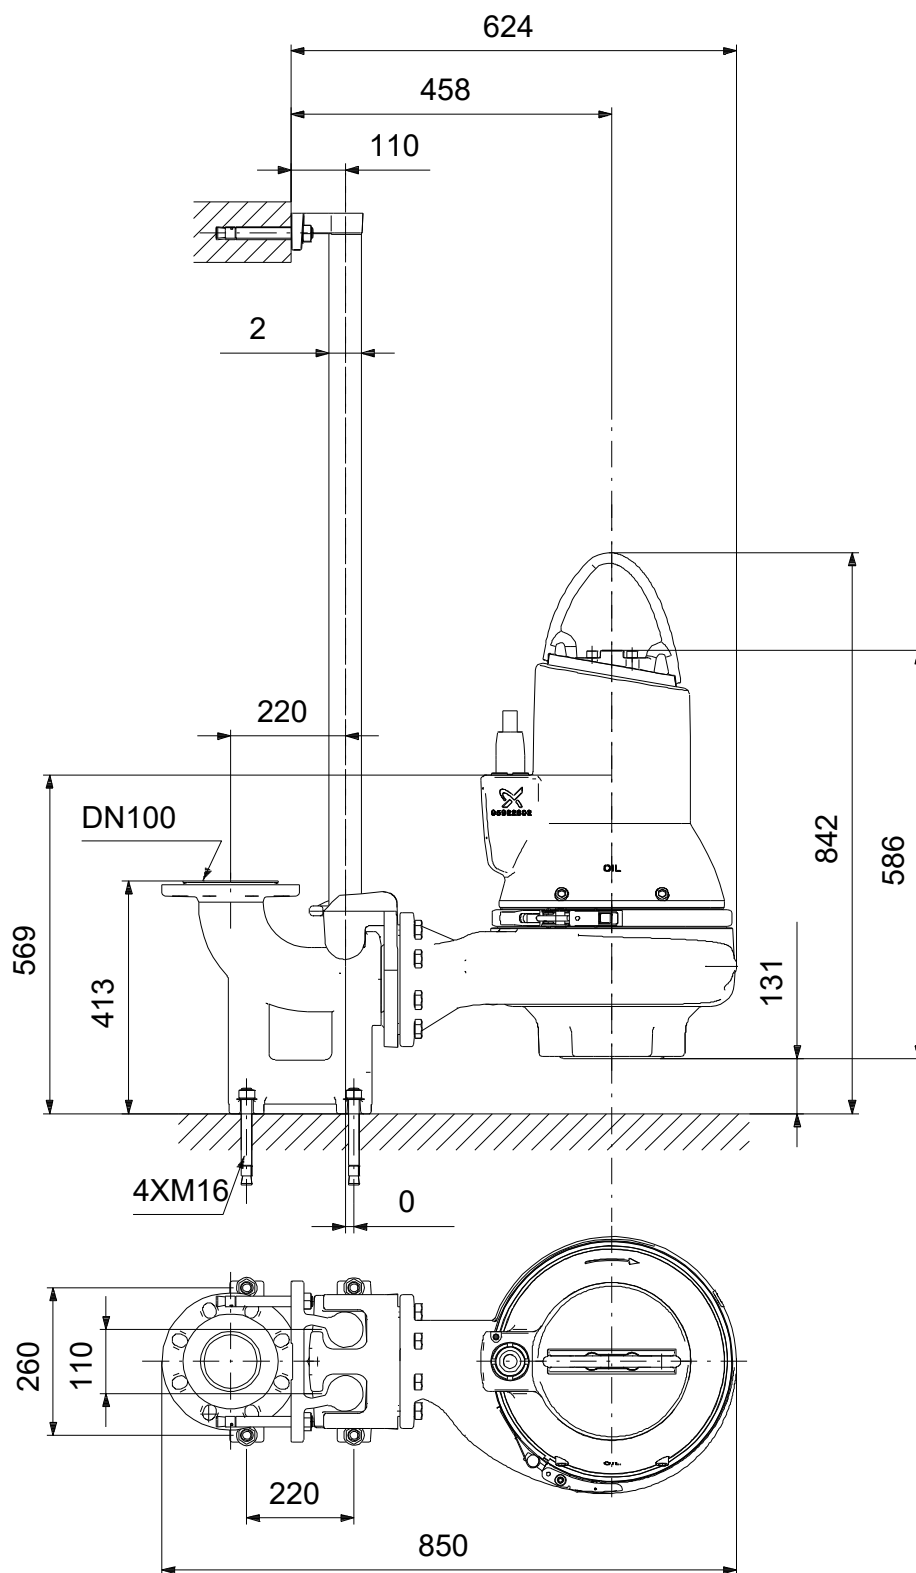

Note! All units are in [mm] unless others are stated.



Disclaimer: This simplified dimensional drawing does not show all details.

98625976 SLV.80.100 .13.4.50D.C 50 Hz

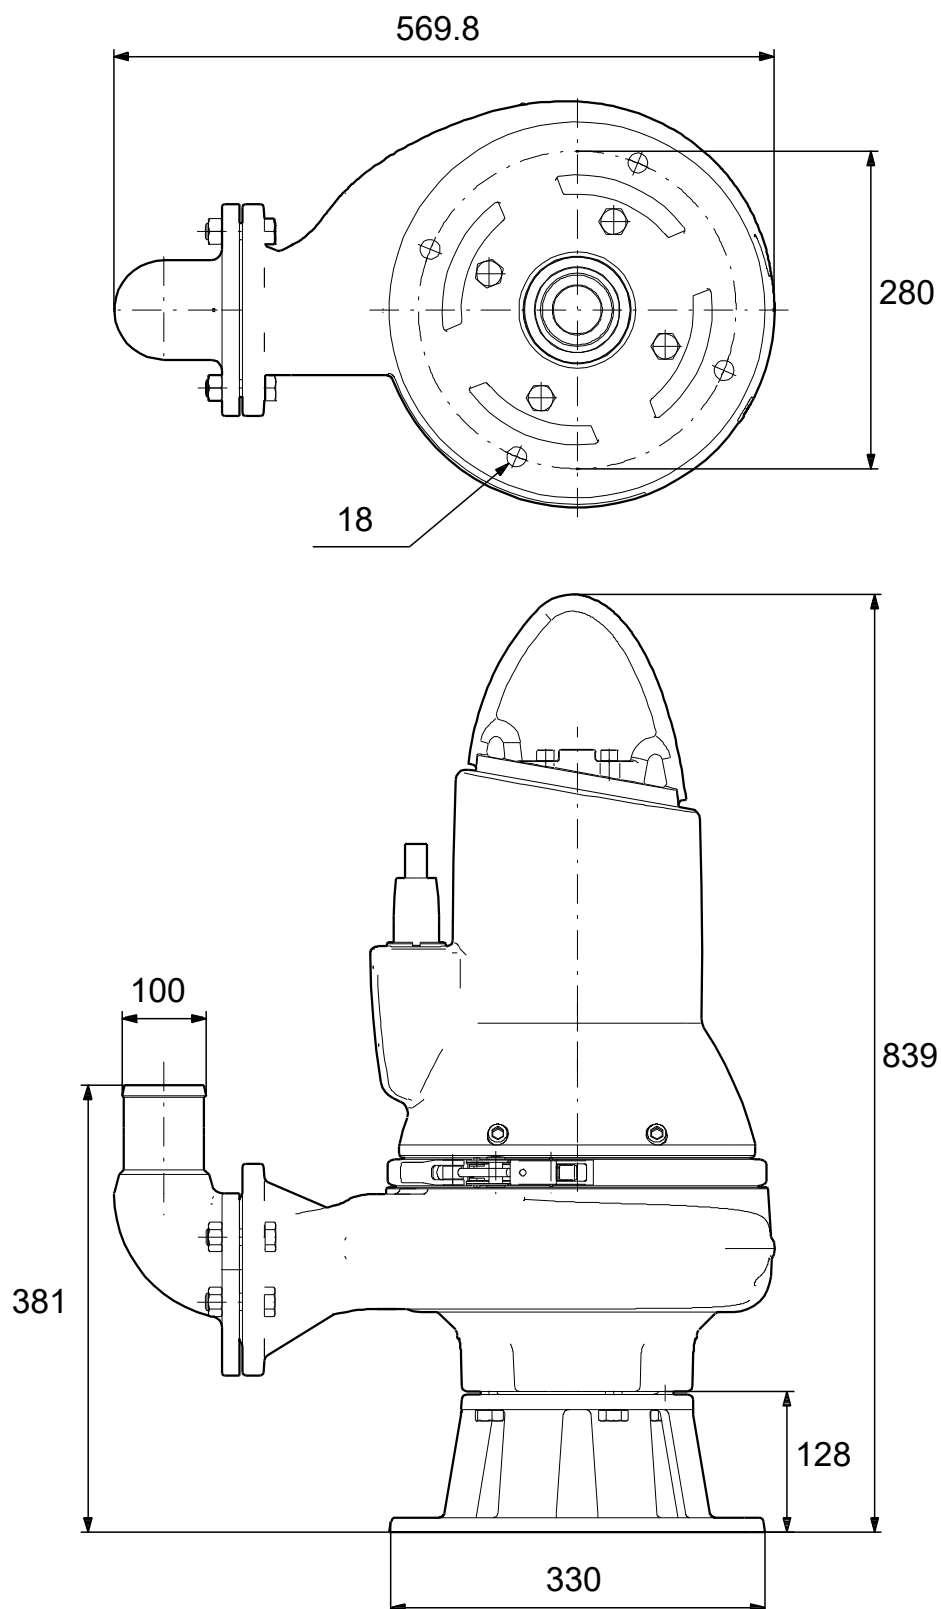

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

98625976 SLV.80.100 .13.4.50D.C 50 Hz

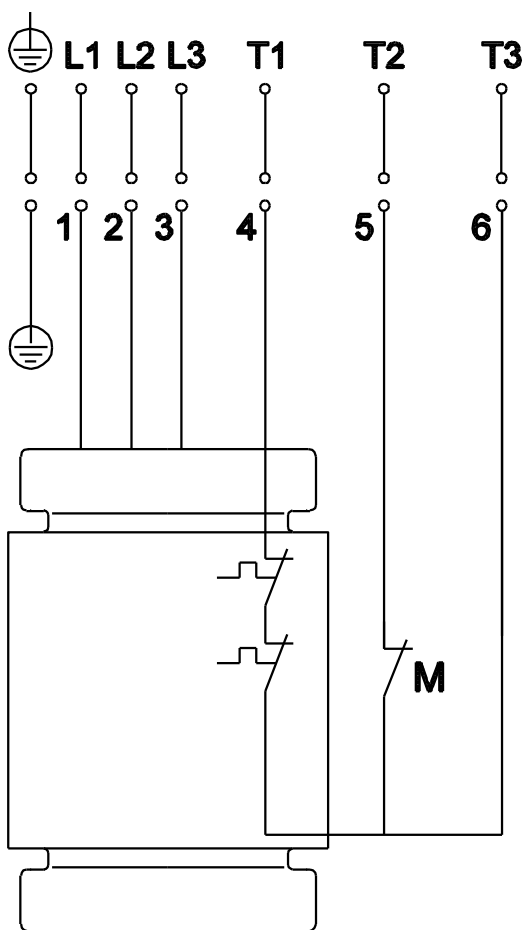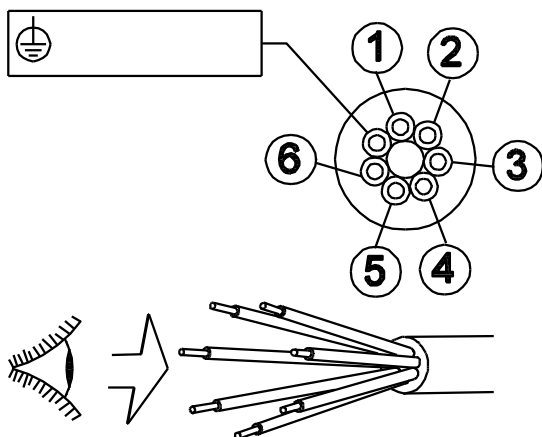

Note! All units are in [mm] unless others are stated.

