

Qty.	Description
------	-------------

1	SL1.50.80 .40.EX.2.51D.C
---	--------------------------



Note! Product picture may differ from actual product

Product No.: [98626708](#)

Non-self-priming, single-stage, centrifugal pump designed for handling wastewater, process water and unscreened raw sewage.

The pump is designed for intermittent and continuous operations in submerged installation. The revolutionary S-tube® impeller provides free spherical passage of solids up to 50 mm and is suitable for wastewater with a dry matter content of up to 3 %. A unique stainless-steel clamp assembling system enables quick and easy disassembly of the pump from the motor unit for service and inspection. No special tools are required. Pipework connection is via a DIN flange.

Further product details

The pump is suitable for both temporary and permanent installation either as free-standing on ring stand or on an auto-coupling system.

Pump

The pump housing, motor top and impeller are made of cast iron (EN-GJL-250).

All surfaces of the cast iron parts are protected with cathaphoresis coating.

The surface of the cast iron pump parts is afterwards painted with environmental friendly powder coating (type NCS 9000N (black), gloss code 30, thickness 100 µm) which ensures high impact and corrosion protection.

The final pump is assembled from already painted parts which ensures that no rust or scale can be formed in grooves between parts, etc.

The S-tube® impeller is providing free spherical passage through the impeller and pump housing and creates a natural extension of the pipework connected to the pump.

The S-tube® impeller is a wet-balanced and tube-shaped channel impeller placed in a pump housing that matches the smooth tube shape leaving no obstructions or dead zones.


The key to the S-tube® design is simplicity, with no cutting or moving functions that can get worn over time, thereby ensuring constant, superior efficiency. The simple design means lower life cycle costs because abrasive wear is reduced and there are fewer clogging incidents.







Qty.	Description										
1	The shaft seal consists of two mechanical seals that ensure a reliable sealing between the pumped liquid and motor. The shaft seals are incorporated in a single-unit cartridge shaft seal system that is easy to replace in the field without use of special tools. The combination of the primary and secondary seals in a cartridge shaft seal system results in a shorter assembly length compared to conventional shaft seals. - Primary seal: Silicon carbide/silicon carbide (SiC/SiC) - Secondary seal: Carbon/Ceramics The shaft seal is bidirectional, meaning it operates correctly in case of backflow through the pump.  The pump is approved according to CE EN12050-2, ATEX. The pump is approved for installation in explosive atmospheres and holds the following examination certificate: - ATEX (EU): KEMA08ATEX0125X - IECEX: IECEX KEM08.0039X The certificate has been issued according to the ATEX directive (94/9/EC). For applications involving a risk of explosion, or where otherwise required, the pump is approved with the following explosion protection classifications. Mains-driven pump, without sensor: II2 G Ex cd IIB T3, T4 Gb Mains-driven pump, with sensor: II2 G Ex cd mb IIB T3, T4 Gb Frequency converter pump, without sensor: II2 G Ex cd IIB T3, T4 Gb Frequency converter pump, with sensor: II2 G Ex cd mb IIB T3, T4 Gb Note: Explosion-proof pumps must always be fully submerged. Motor The motor is a watertight, totally encapsulated motor supplied with a 10 m power cable. The stainless steel plug is fastened with a union nut. This nut and the O-rings provide sealing against ingress of the liquid. The plug is polyurethane-embedded, ensuring a watertight and durable seal around the leads of the cable. This prevents the ingress of water into the motor through the cable in case of cable breakage or adverse handling in connection with installation or service. A compact motor construction with a short shaft reduces vibrations, resulting in an increased efficiency and lifetime of the shaft seal and ball bearings. The motor features built-in thermal protection to protect the motor against overheating and ensure the reliability. The pump is equipped with the following sensor(s): - A digital moisture switch that is fitted in the motor chamber monitors whether water enters the motor chamber. If moisture is detected in the motor chamber, the switch will trip and send a warning to the sensor module. The pump is designed for speed-controlled operation to keep the energy consumption at a minimum. To avoid the risk of sedimentation in the pipes, we recommend that you operate the speed-controlled pump within a speed range of 30 % to 100 % and at a flow rate above 1 m/s. Controls: <table> <tr> <td>Moisture sensor:</td><td>with moisture sensors</td></tr> <tr> <td>Water-in-oil sensor:</td><td>without water-in-oil sensor</td></tr> </table> Liquid: <table> <tr> <td>Liquid temperature range:</td><td>10 .. 40 °C</td></tr> <tr> <td>Density:</td><td>998.2 kg/m³</td></tr> </table> Technical: <table> <tr> <td>Maximum flow:</td><td>19.4 l/s</td></tr> </table>	Moisture sensor:	with moisture sensors	Water-in-oil sensor:	without water-in-oil sensor	Liquid temperature range:	10 .. 40 °C	Density:	998.2 kg/m ³	Maximum flow:	19.4 l/s
Moisture sensor:	with moisture sensors										
Water-in-oil sensor:	without water-in-oil sensor										
Liquid temperature range:	10 .. 40 °C										
Density:	998.2 kg/m ³										
Maximum flow:	19.4 l/s										

Qty.	Description
1	Type of impeller: S-TUBE Maximum particle size: 50 mm Primary shaft seal: SIC/SIC Approvals: CE EN12050-2, ATEX Curve tolerance: ISO9906:2012 3B2 Rated speed: 2930 rpm Materials: Pump housing: Cast iron EN 5.1301 EN-GJL-250 Impeller: Cast iron EN 5.1301 EN-GJL-250 Motor: EN-GJL-250 Installation: Range of ambient temperature: -20 .. 40 °C Maximum operating pressure: 6 bar Flange standard: DIN Type of inlet connection: DIN Type of outlet connection: DIN Size of inlet connection: DN 65 Size of outlet connection: DN 80 Pressure rating: PN 10 Maximum installation depth: 20 m Auto-coupling: 96090993 Frame range: C22 Electrical data: Power input - P1: 4.9 kW Rated power - P2: 4 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-415 V Voltage tolerance: +10/-10 % Max starts per. hour: 20 Rated current: 8.2 A Starting current: 86 A Cos phi - power factor: 0.88 Cos phi - p.f. at 3/4 load: 0.83 Cos phi - p.f. at 1/2 load: 0.77 Rated speed: 2930 rpm Motor efficiency at full load: 86.2 % Motor efficiency at 3/4 load: 85.3 % Motor efficiency at 1/2 load: 83.2 % Number of poles: 2 Start. method: star/delta Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): H Explosion proof: yes Length of power cable: 10 m Cable type: LYNIFLEX Others: Net weight: 117 kg

98626708 SL1.50.80 .40.EX.2.51D.C 50 Hz

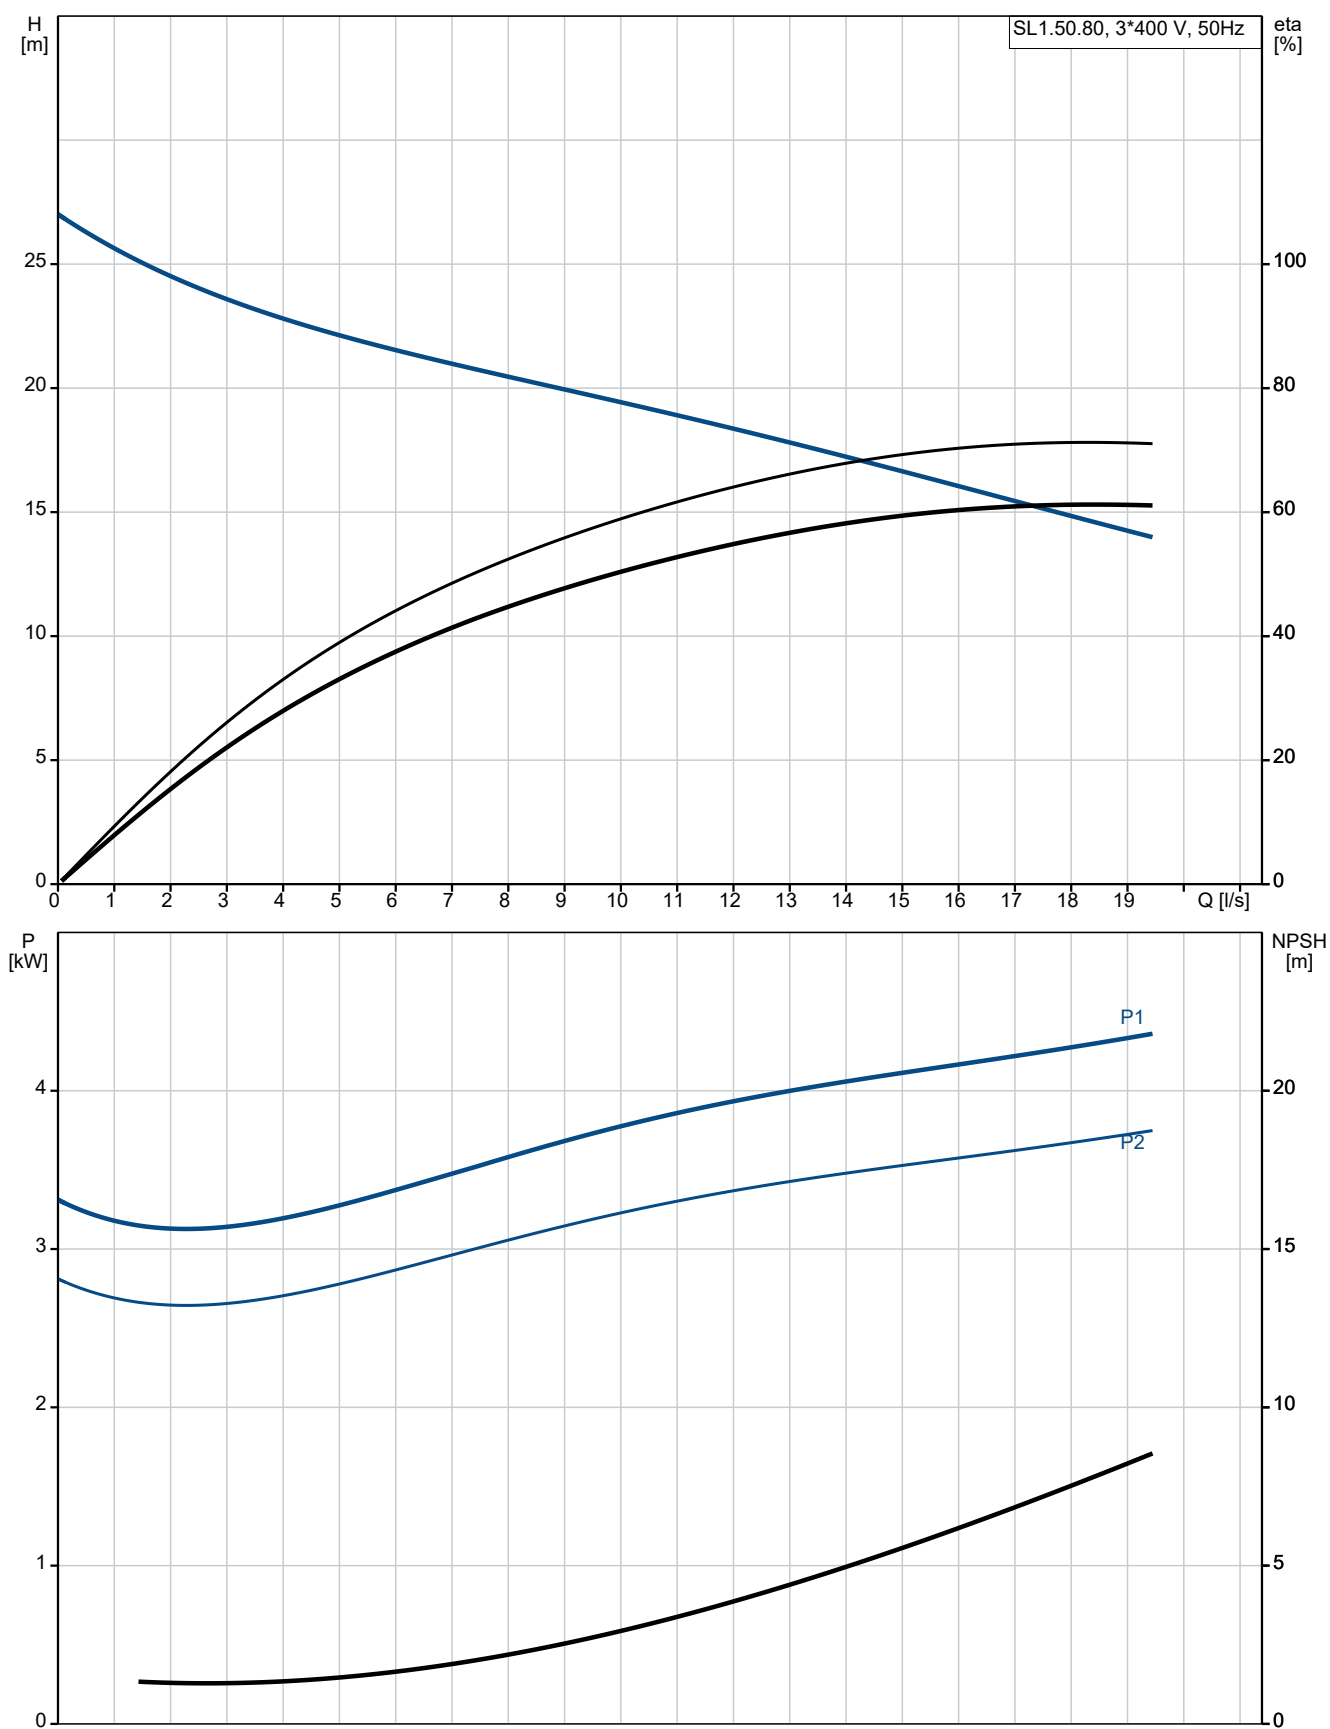

Description	Value
General information:	
Product name:	SL1.50.80 .40.EX.2.51D.C
Product No:	98626708
EAN number:	5711498477971
Technical:	
Maximum flow:	19.4 l/s
Maximum head:	27 m
Type of impeller:	S-TUBE
Maximum particle size:	50 mm
Primary shaft seal:	SIC/SIC
Approvals:	CE EN12050-2, ATEX
Curve tolerance:	ISO9906:2012 3B2
Cooling jacket:	without cooling jacket
Rated speed:	2930 rpm
Materials:	
Pump housing:	Cast iron
Pump housing:	EN 5.1301 EN-GJL-250
Impeller:	Cast iron
Impeller:	EN 5.1301 EN-GJL-250
Motor:	EN-GJL-250
Installation:	
Range of ambient temperature:	-20 .. 40 °C
Maximum operating pressure:	6 bar
Flange standard:	DIN
Type of inlet connection:	DIN
Type of outlet connection:	DIN
Size of inlet connection:	DN 65
Size of outlet connection:	DN 80
Pressure rating:	PN 10
Maximum installation depth:	20 m
Inst dry/wet:	SUBMERGED
Installation:	Vertical
Auto-coupling:	96090993
Frame range:	C22
Liquid:	
Liquid temperature range:	10 .. 40 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input - P1:	4.9 kW
Rated power - P2:	4 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-415 V
Voltage tolerance:	+10/-10 %
Max starts per. hour:	20
Rated current:	8.2 A
Starting current:	86 A
Cos phi - power factor:	0.88
Cos phi - p.f. at 3/4 load:	0.83
Cos phi - p.f. at 1/2 load:	0.77
Rated speed:	2930 rpm
Motor efficiency at full load:	86.2 %
Motor efficiency at 3/4 load:	85.3 %
Motor efficiency at 1/2 load:	83.2 %
Number of poles:	2
Start. method:	star/delta
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	H
Explosion proof:	yes

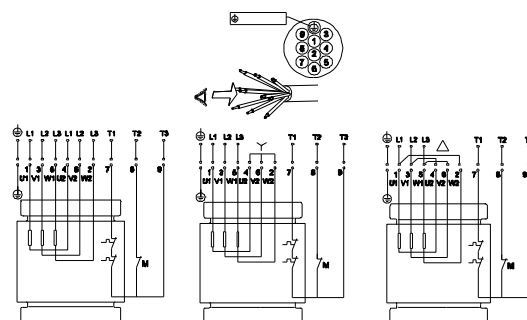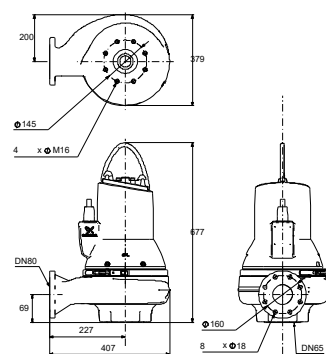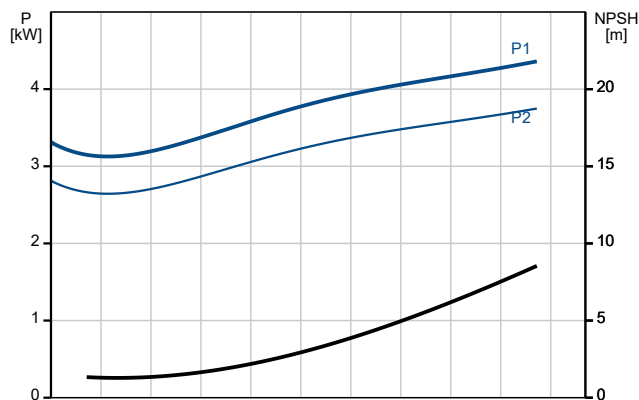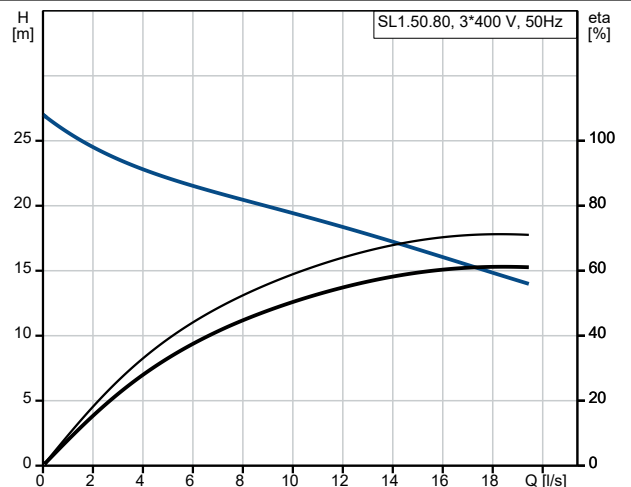



Company name:

Created by:


Phone:

Date:

28/12/2022


Description	Value
Built-in motor protection:	THERMAL SWITCH
Length of power cable:	10 m
Cable type:	LYNIFLEX
Controls:	
Control box:	not included
Moisture sensor:	with moisture sensors
Water-in-oil sensor:	without water-in-oil sensor
Others:	
Net weight:	117 kg

98626708 SL1.50.80 .40.EX.2.51D.C 50 Hz

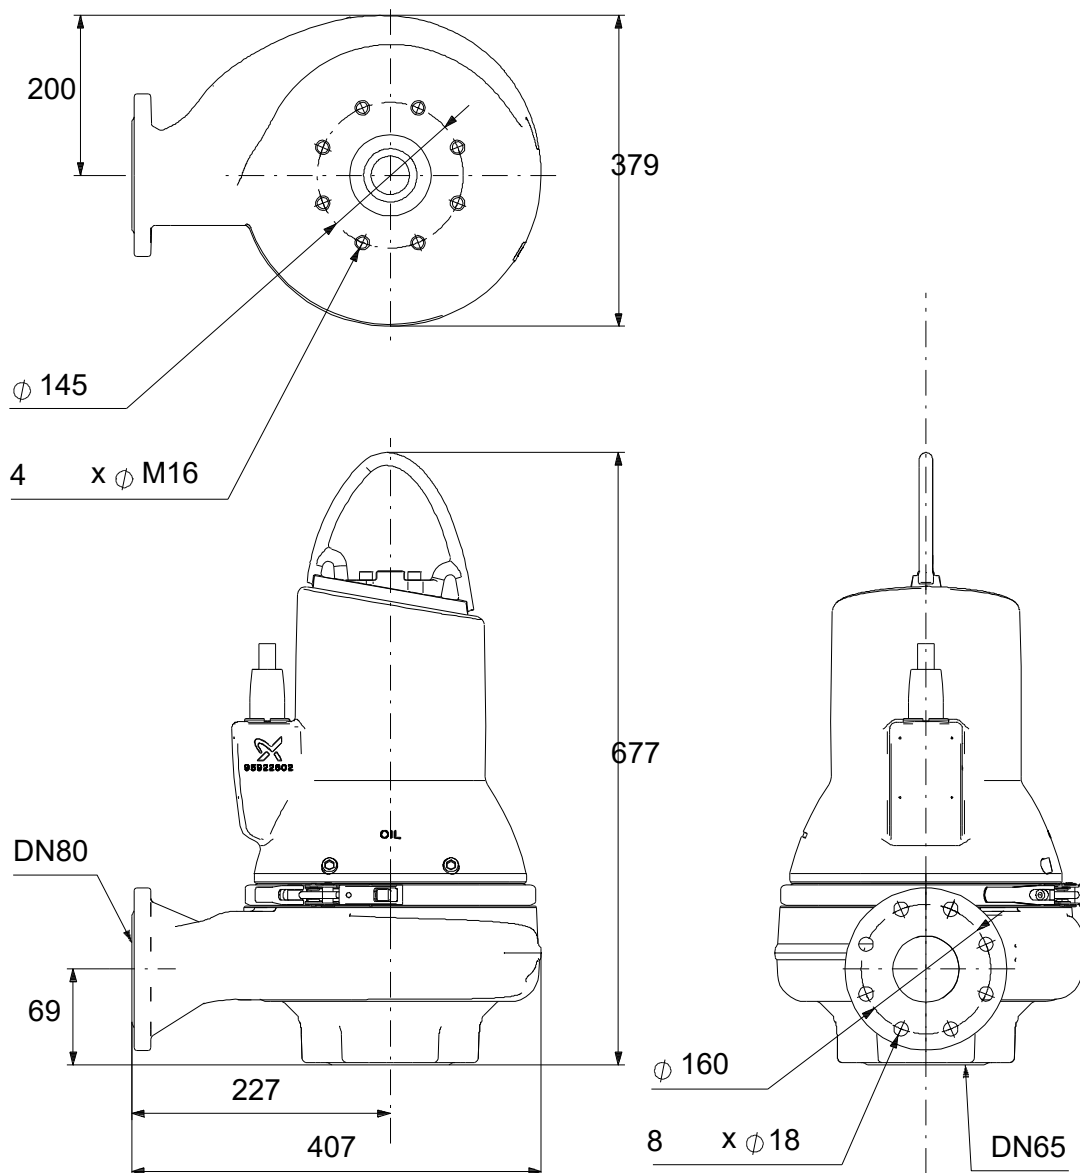


Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

98626708 SL1.50.80 .40.EX.2.51D.C 50 Hz

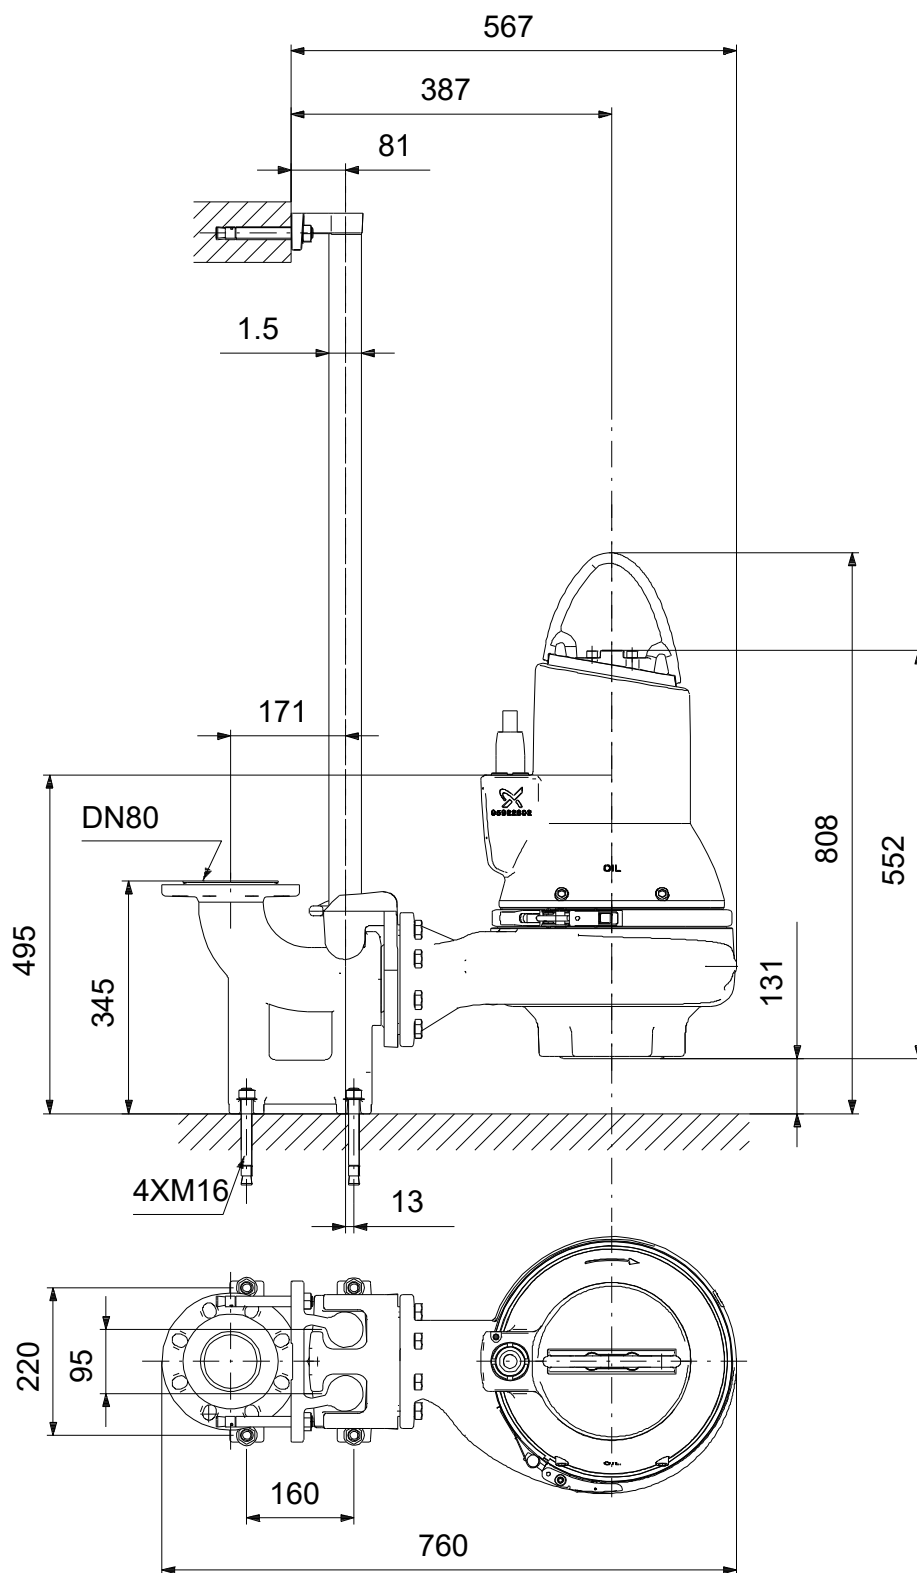





Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

98626708 SL1.50.80 .40.EX.2.51D.C 50 Hz

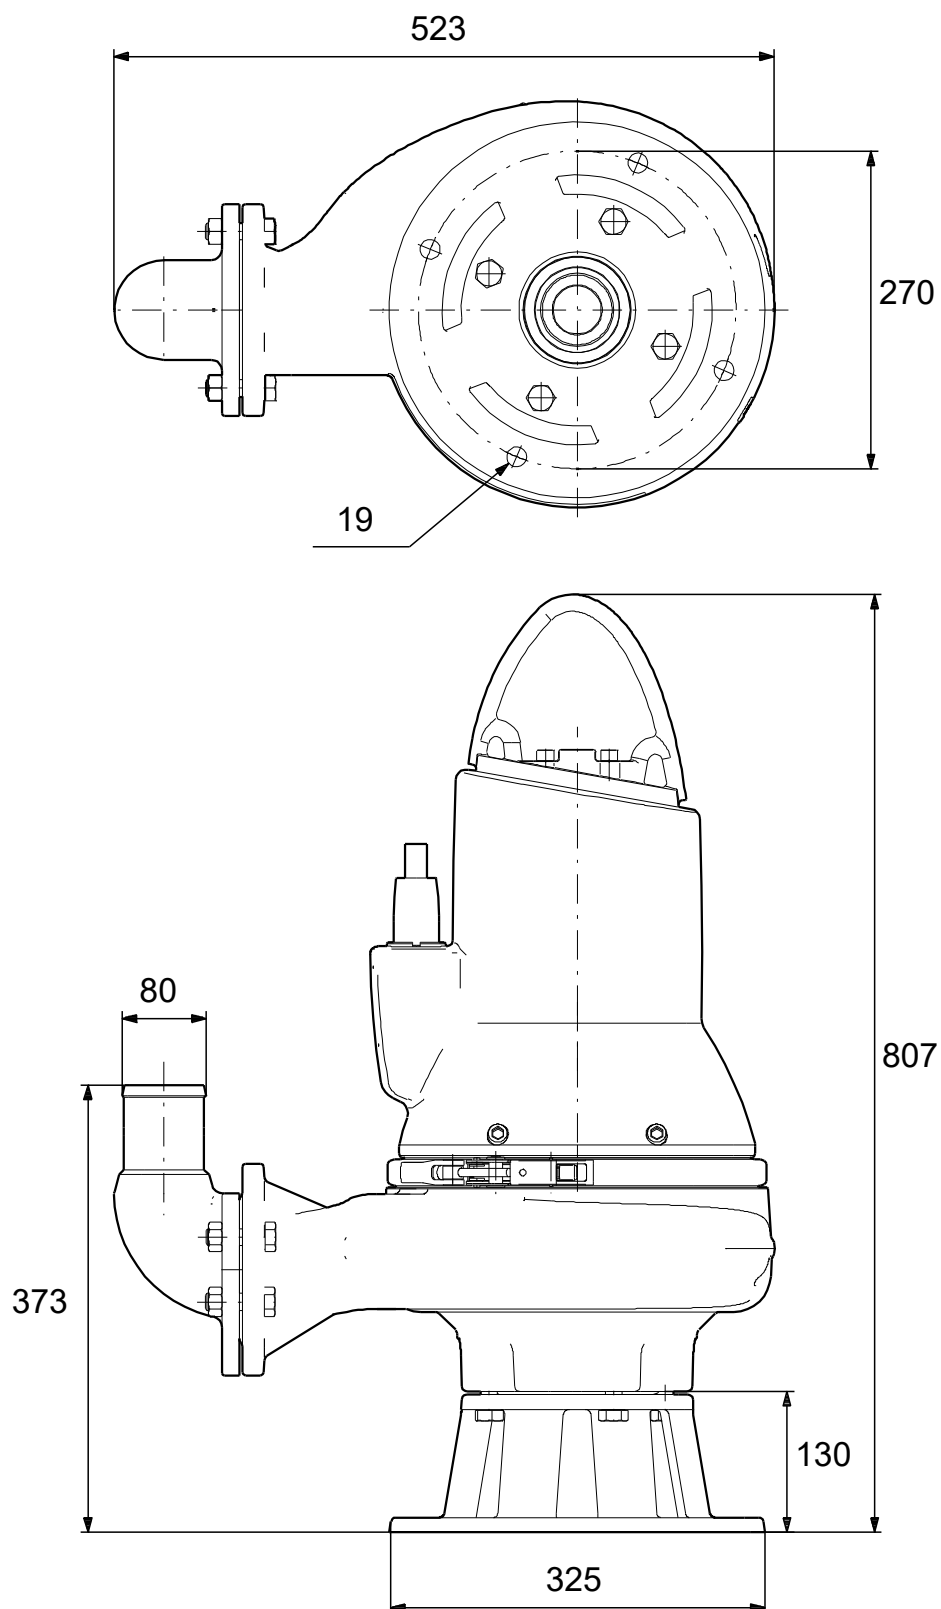

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

98626708 SL1.50.80 .40.EX.2.51D.C 50 Hz

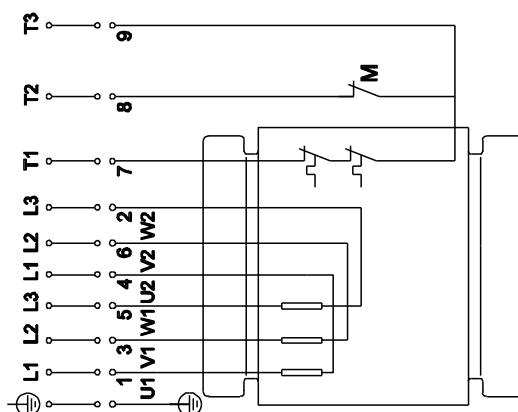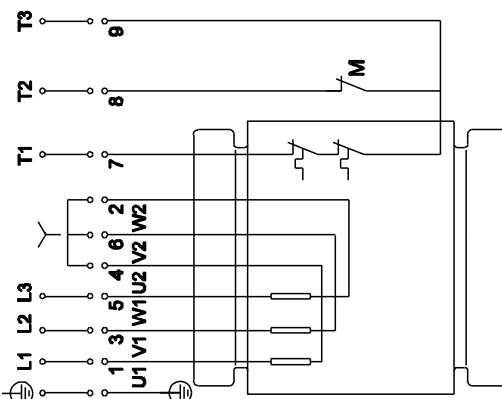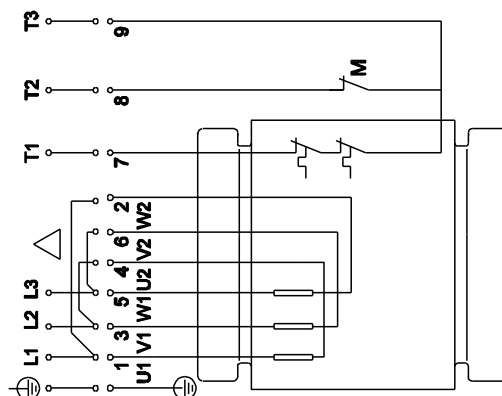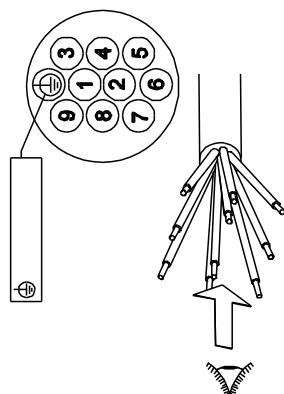

Note! All units are in [mm] unless others are stated.

