
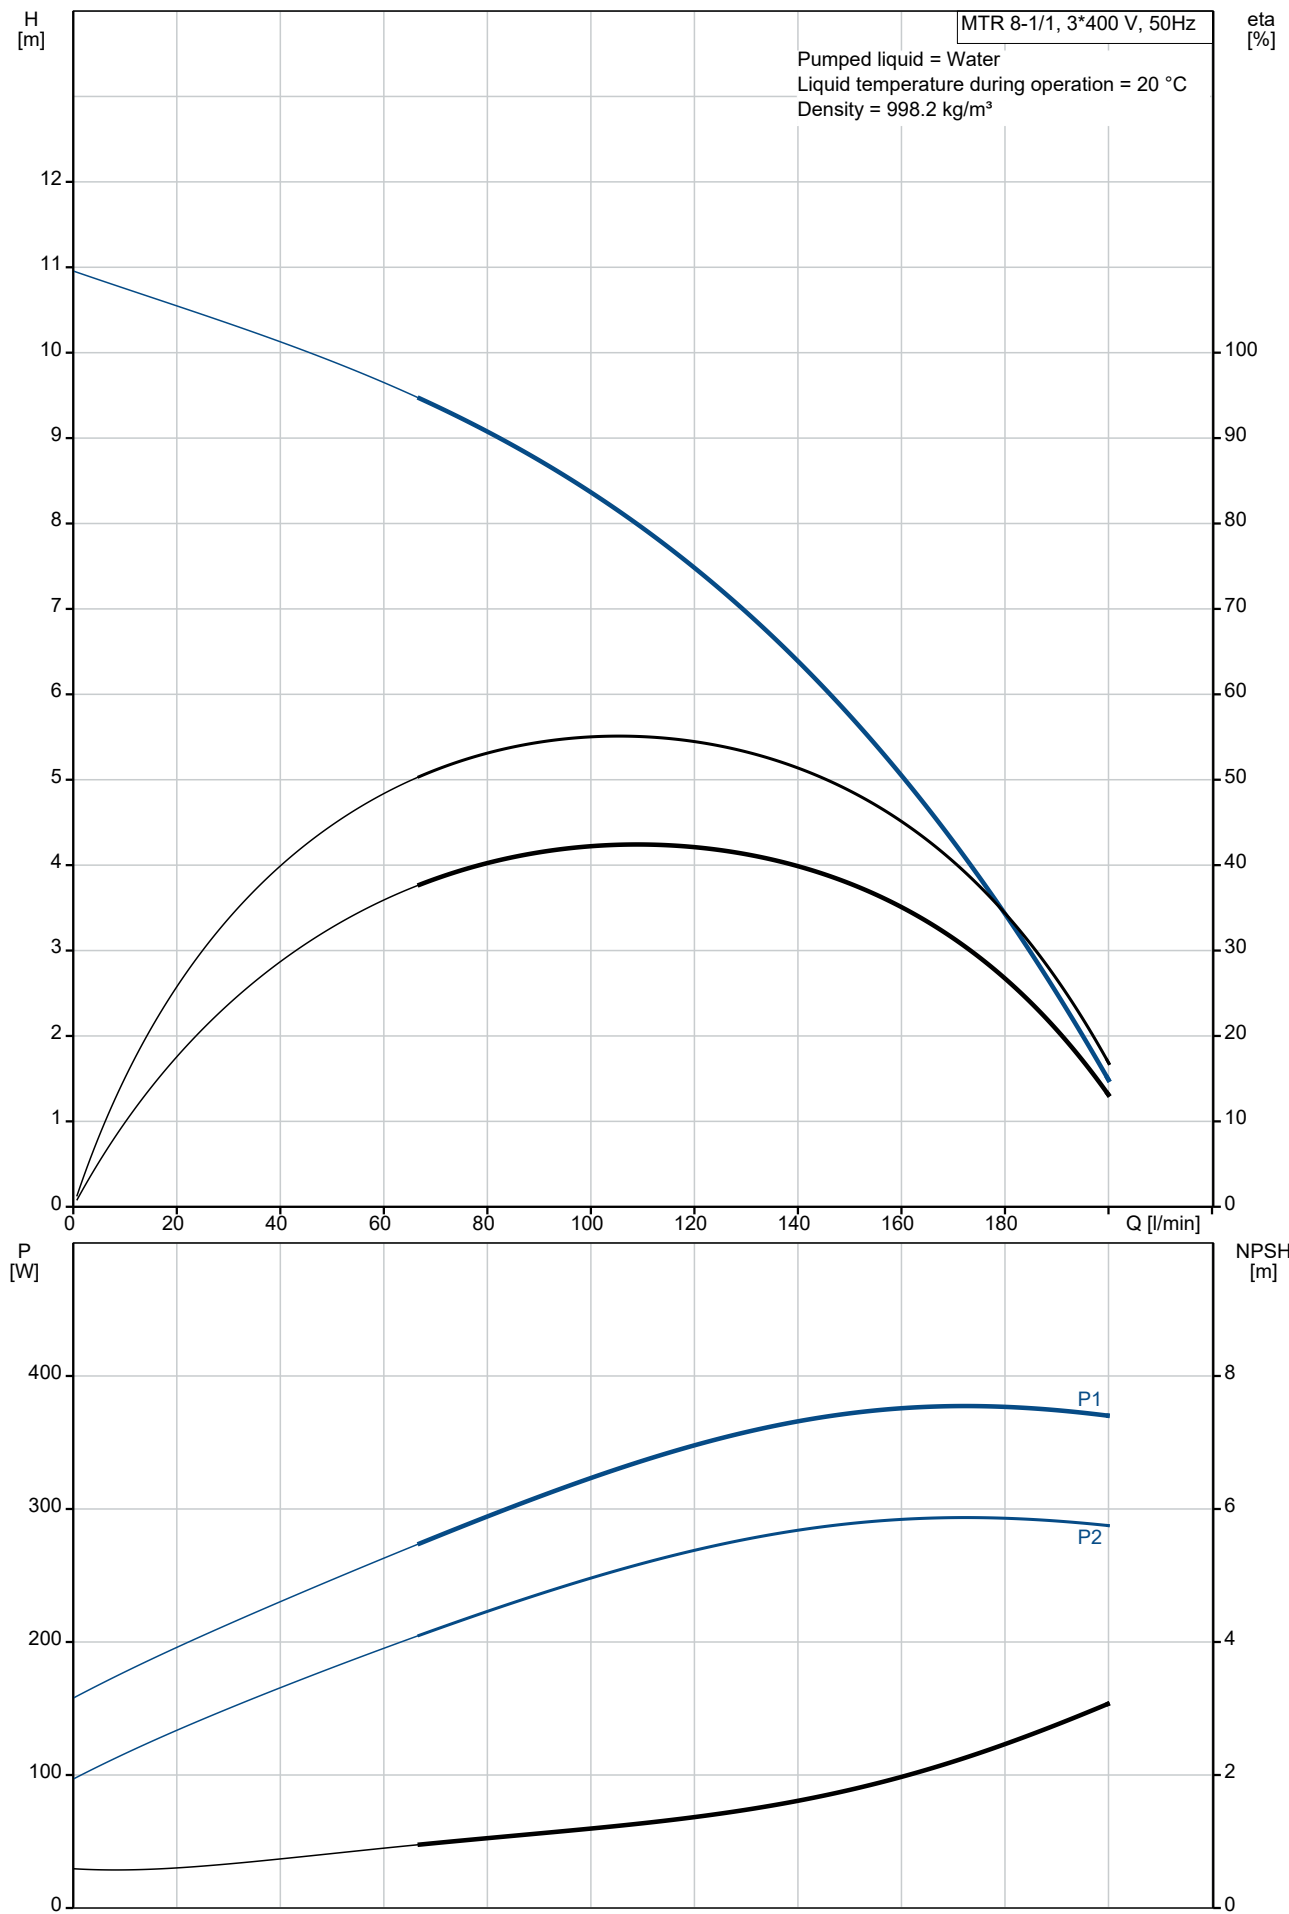






Qty.	Description
1	<p>MTR 8-1/1 A-W-A-HUUV</p>  <p>Product No.: On request</p> <p>Multistage, immersible, self-priming, centrifugal pump for vertical installation in tanks etc. The pump head and base are in cast iron – all other wetted parts are in stainless steel. The pump has the following characteristics:</p> <ul style="list-style-type: none"> • Dimensions according to DIN 5440. • Impellers, intermediate chambers and spline shaft are made of Stainless steel. • Mechanical shaft seal according to EN 12756. • Power transmission via sintered metal split coupling. <p>A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. The pump is fitted with a 3-phase, fan-cooled asynchronous motor.</p> <p>Controls:</p> <p>Frequency converter: NONE</p> <p>Liquid:</p> <p>Pumped liquid: Water</p> <p>Liquid temperature range: -10 .. 90 °C</p> <p>Selected liquid temperature: 20 °C</p> <p>Density: 998.2 kg/m³</p> <p>Technical:</p> <p>Pump speed on which pump data are based: 2870 rpm</p> <p>Rated flow: 133 l/min</p> <p>Rated head: 6.5 m</p> <p>Chambers: 1</p> <p>Drainage back to tank: N</p> <p>Pump orientation: Vertical</p> <p>Code for shaft seal: HUUV</p> <p>Approvals: CE,EAC</p> <p>Curve tolerance: ISO9906:2012 3B</p> <p>Materials:</p> <p>Pump head: Cast iron EN 1561 EN-GJL-200 ASTM A48-25B</p> <p>Impeller: Stainless steel EN 1.4301 AISI 304</p> <p>Installation:</p> <p>t max amb: 60 °C</p> <p>Maximum operating pressure: 25 bar</p> <p>Max pressure at stated temp: 25 bar / 90 °C</p> <p>Type of connection: G internal thread</p> <p>Size of outlet connection: 1 1/4 inch</p> <p>Immersion depth: 196 mm</p> <p>Flange size for motor: FT85</p> <p>Electrical data:</p> <p>Motor standard: IEC</p> <p>Motor type: 71A</p> <p>IE Efficiency class: IE3</p> <p>Rated power - P2: 0.37 kW</p>

Qty.	Description
1	Mains frequency: 50 Hz Suitable for 50/60 Hz: N Rated voltage: 3 x 220-240D/380-415Y V Rated current: 1.74/1.00 A Starting current: 490-530 % Cos phi - power factor: 0.80-0.70 Rated speed: 2850-2880 rpm Efficiency: IE3 73,8% Motor efficiency at full load: 73.8 % Motor efficiency at 3/4 load: 79.0 % Motor efficiency at 1/2 load: 75.5 % Number of poles: 2 Enclosure class (IEC 34-5): 55 Dust/Jetting Insulation class (IEC 85): F Motor No: 85805102 Others: Terminal box position: 6 Minimum efficiency index, MEI \geq : 0.70 Net weight: 17.6 kg Gross weight: 20.7 kg Shipping volume: 0.045 m ³ Danish VVS No.: 386965001 Country of origin: HU Custom tariff no.: 84137075

On request MTR 8-1/1 A-W-A-HUUV 50 Hz




Description	Value		
General information:			
Product name:	MTR 8-1/1 A-W-A-HUUV		
Product No:	On request		
EAN number:	On request		
Technical:			
Pump speed on which pump data are based:	2870 rpm		
Rated flow:	133 l/min		
Rated head:	6.5 m		
Chambers:	1		
Impellers:	1		
Number of reduced-diameter impellers:	0		
Drainage back to tank:	N		
Pump orientation:	Vertical		
Code for shaft seal:	HUUV		
Approvals:	CE, EAC		
Curve tolerance:	ISO9906:2012 3B		
Pump version:	A		
Model:	A		
Materials:			
Pump head:	Cast iron		
Pump head:	EN 1561 EN-GJL-200		
Pump head:	ASTM A48-25B		
Impeller:	Stainless steel		
Impeller:	EN 1.4301		
Impeller:	AISI 304		
Material code:	A		
Installation:			
t max amb:	60 °C		
Maximum operating pressure:	25 bar		
Max pressure at stated temp:	25 bar / 90 °C		
Type of connection:	G internal thread		
Size of outlet connection:	1 1/4 inch		
Immersion depth:	196 mm		
Flange size for motor:	FT85		
Connect code:	W		
Liquid:			
Pumped liquid:	Water		
Liquid temperature range:	-10 .. 90 °C		
Selected liquid temperature:	20 °C		
Density:	998.2 kg/m³		
Electrical data:			
Motor standard:	IEC		
Motor type:	71A		
IE Efficiency class:	IE3		
Rated power - P2:	0.37 kW		
Mains frequency:	50 Hz		
Suitable for 50/60 Hz:	N		
Rated voltage:	3 x 220-240D/380-415Y V		
Rated current:	1.74/1.00 A		
Starting current:	490-530 %		
Cos phi - power factor:	0.80-0.70		
Rated speed:	2850-2880 rpm		
Efficiency:	IE3 73,8%		
Motor efficiency at full load:	73.8 %		
Motor efficiency at 3/4 load:	79.0 %		
Motor efficiency at 1/2 load:	75.5 %		
Number of poles:	2		
Enclosure class (IEC 34-5):	55 Dust/Jetting		
Insulation class (IEC 85):	F		
Built-in motor protection:	NONE		
Motor No:	85805102		
Controls:			

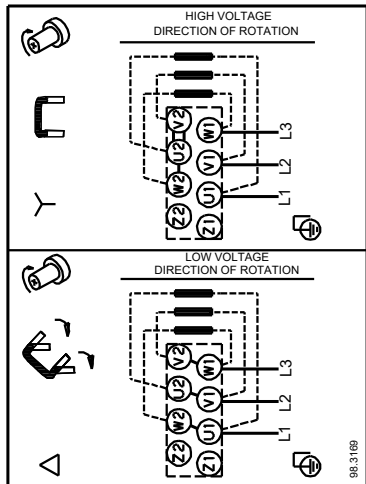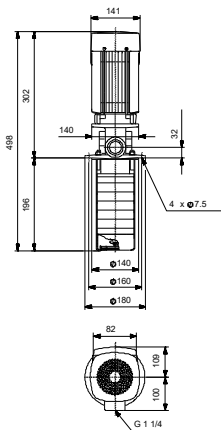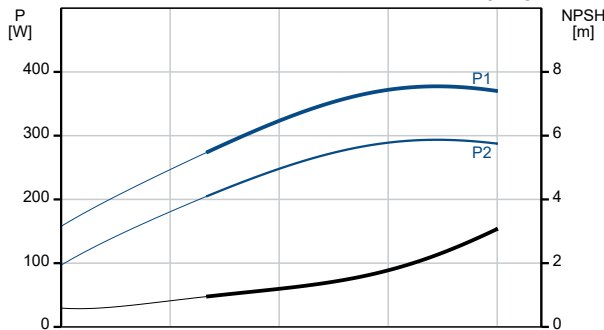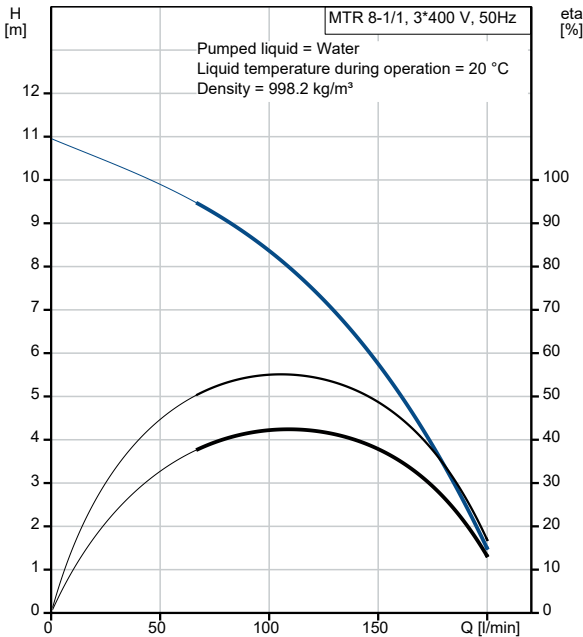


Description	Value
Frequency converter:	NONE
Others:	
Terminal box position:	6
Minimum efficiency index, MEI ≥:	0.70
Net weight:	17.6 kg
Gross weight:	20.7 kg
Shipping volume:	0.045 m³
Danish VVS No.:	386965001
Country of origin:	HU
Custom tariff no.:	84137075

On request MTR 8-1/1 A-W-A-HUUV 50 Hz

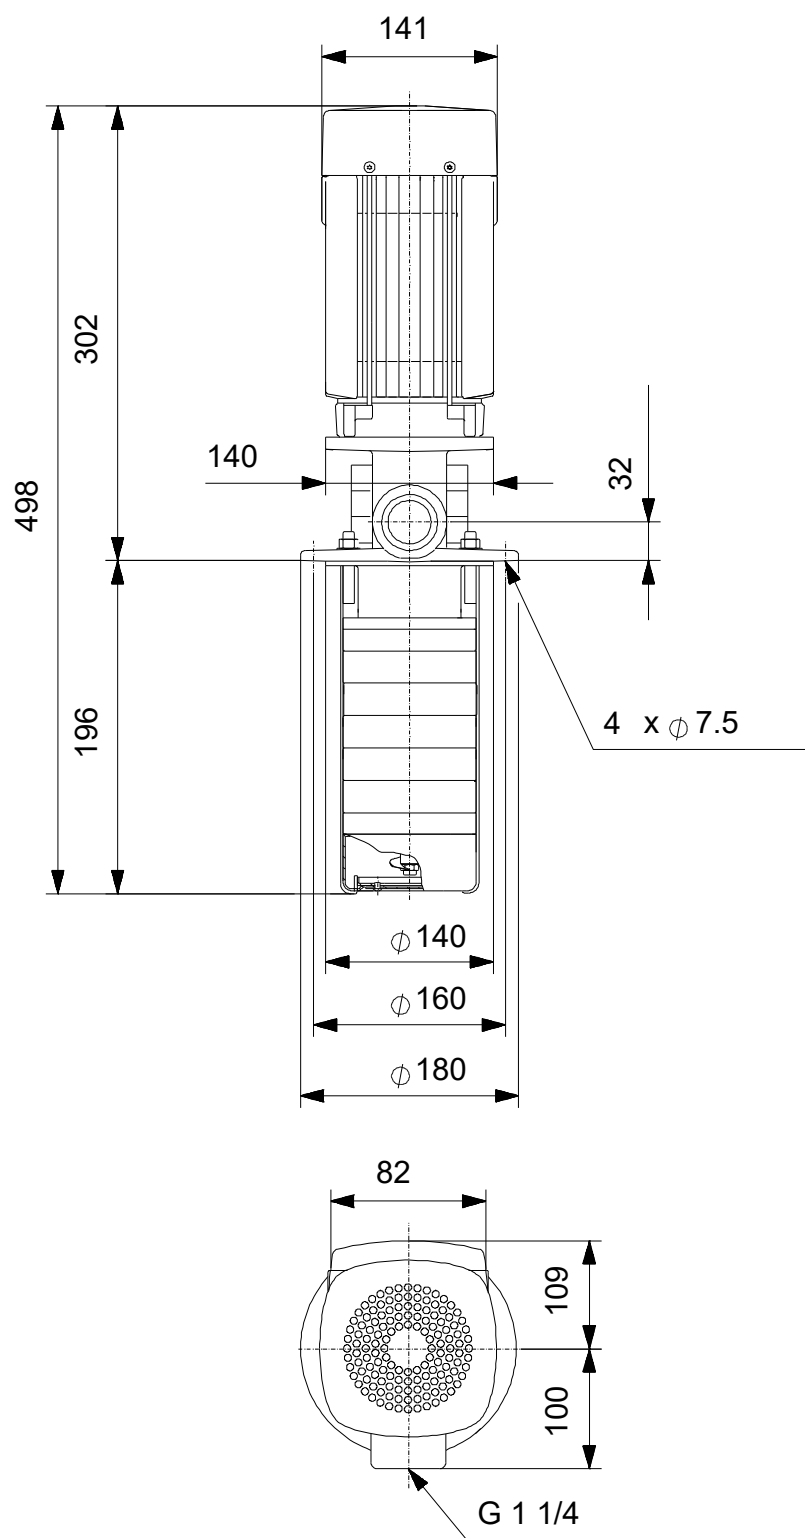

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

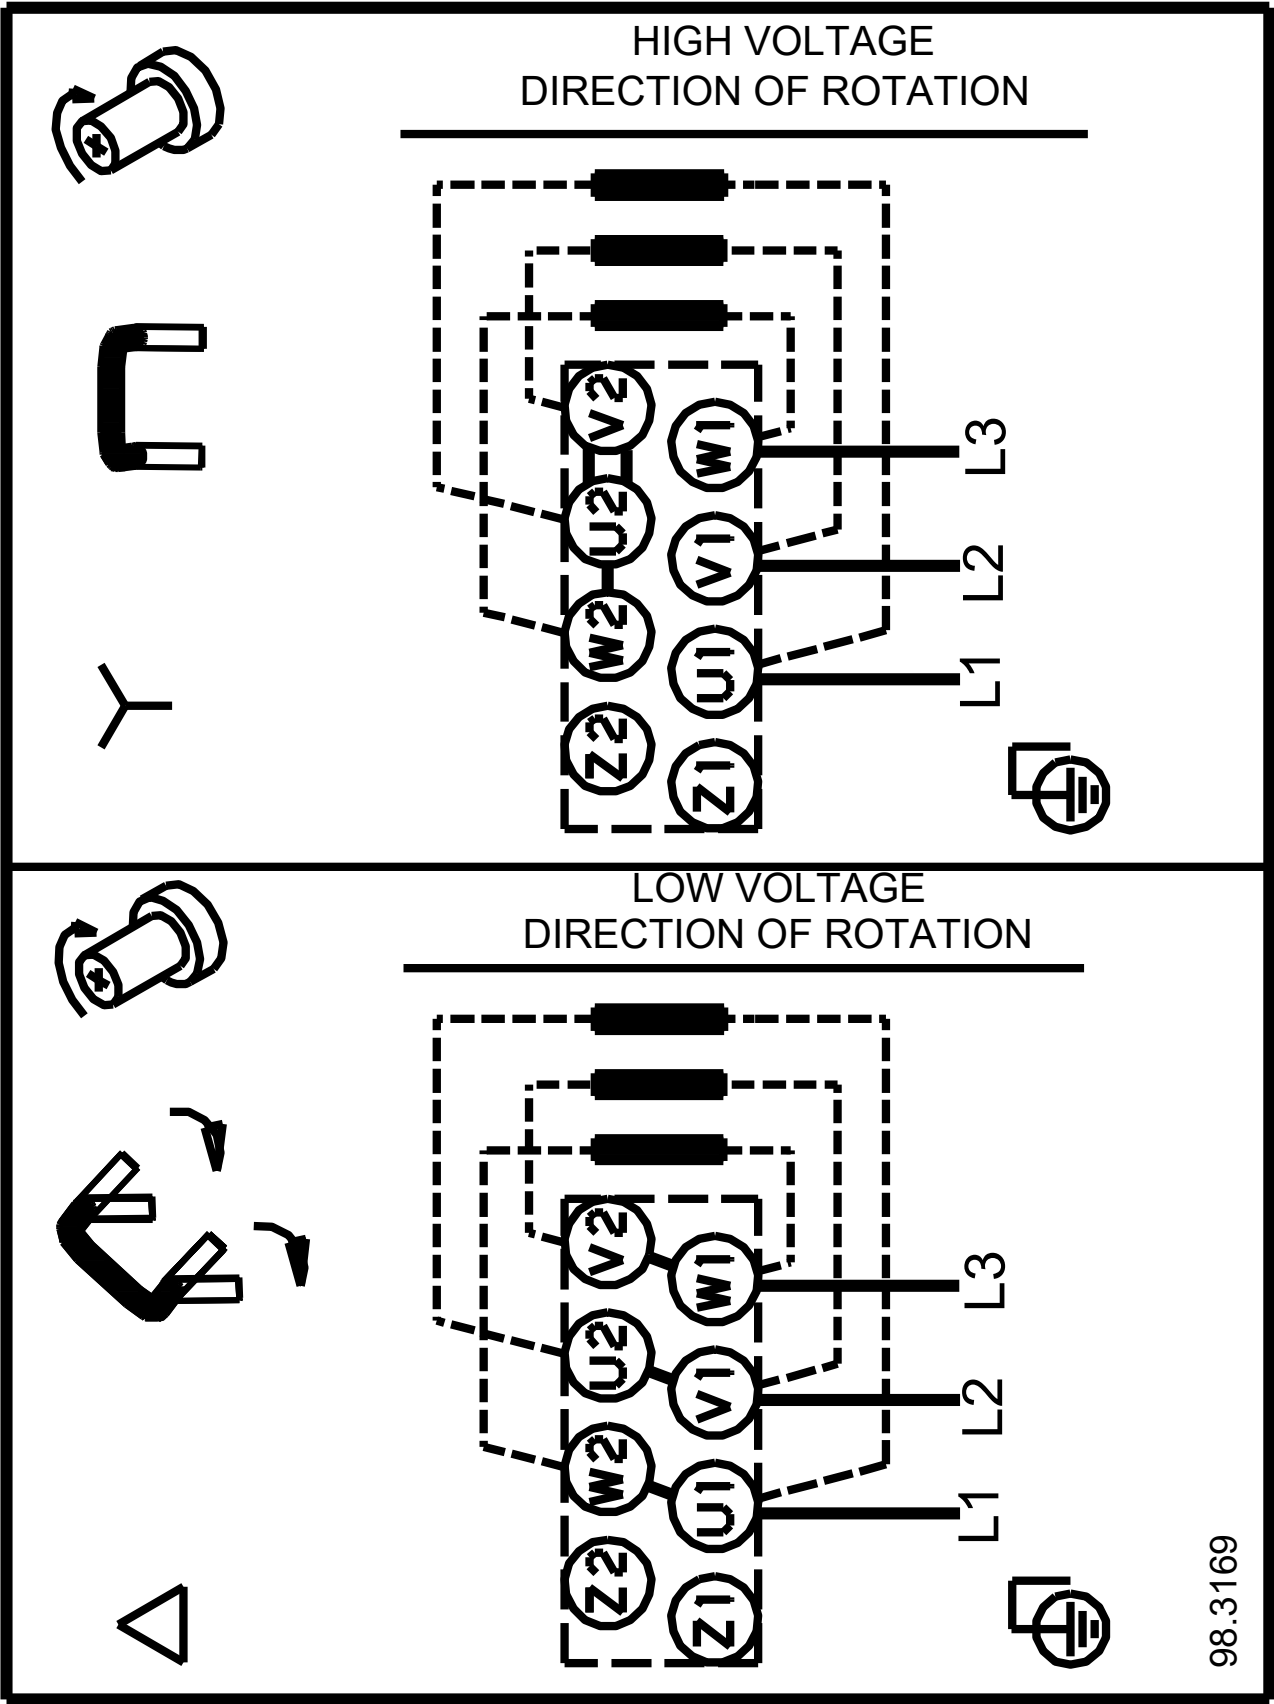

98.3169

Note! All units are in [mm] unless others are stated.

Order Data:	
--------------------	--

Position	Your pos.	Product name	Amount	Product No	Total
		MTR 8-1/1	1	On request	Price on request