


Qty.	Description
1	<p><b>NB 150-315.2/342 AASF1AESBQQEPW5</b></p>  <p><b>Note!</b> Product picture may differ from actual product</p> <p>Product No.: <a href="#">99001675</a></p> <p>Non-self-priming, single-stage, centrifugal volute pump designed according to ISO 5199 with dimensions and rated performance according to EN 733 (10 bar).</p> <p>Flanges are PN 10 with dimensions according to EN 1092-2. The pump has an axial suction port, radial discharge port, horizontal shaft and a back pull-out design enabling removal of the motor, motor stool, cover and impeller without disturbing the pump housing or pipework.</p> <p>The unbalanced rubber bellows seal is according to DIN EN 12756.</p> <p>The pump is close-coupled to a fan-cooled asynchronous motor.</p> <p>The product's minimum efficiency index (MEI) is greater or equal to 0.70. This is by the Commission Regulation (EU) considered as an indicative benchmark for best-performing water pump available on the market as from 1 January 2013.</p> <p>The back pull-out design means that the pump can be serviced by a single person without disturbing the pump housing or pipes.</p>  <p>Cast-iron parts have an epoxy-based coating made in a cathodic electro-deposition (CED) process. CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface.</p> <p><b>Pump</b></p> <p>Motor stool and pump cover are made of cast iron (EN-GJL-250). Coupling guards are fitted to the motor stool. The pump is fitted with an unbalanced rubber bellows seal with torque transmission across the spring and around the bellows. Due to the bellows, the seal does not wear the shaft, and the axial movement is not prevented by deposits on the shaft.</p> <p>Seal faces:</p> <ul style="list-style-type: none"> <li>• Rotating seal ring material: silicon carbide (SiC)</li> <li>• Stationary seat material: silicon carbide (SiC)</li> </ul> <p>This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.</p> <p>Secondary seal material: EPDM (ethylene-propylene rubber)</p> <p>EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.</p> <p>The pump housing has feet.</p> <p>The pump is to be secured to the foundation with bolts through the pump housing feet and motor feet. The pump is delivered with steel support blocks. The support blocks provide horizontal alignment of the pump and ensure clearance between the motor stool/motor flange and the foundation.</p> <p><b>Motor</b></p> <p>The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. Electrical tolerances comply with IEC 60034.</p>

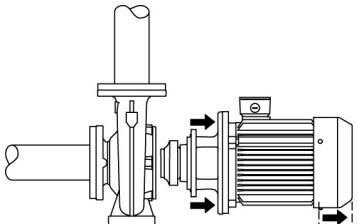

Company name:

Created by:

Phone:

Date:

22/12/2022

Qty.	Description
1	<p>The motor efficiency is classified as IE3 in accordance with IEC 60034-30-1.</p> <p>The motor has thermistors (PTC sensors) in the windings in accordance with DIN 44081/DIN 44082. The protection reacts to both slow- and quick-rising temperatures, e.g. constant overload and stalled conditions.</p> <p>Thermal switches must be connected to an external control circuit in a way which ensures that the automatic reset cannot cause accidents. The motors must be connected to a motor-protective circuit breaker according to local regulations.</p> <p>The motor can be connected to a variable speed drive for adjustment of pump performance to any duty point. Grundfos CUE offers a range of variable speed drives. Please find more information in Grundfos Product Center.</p>

### Further product details

Cast-iron parts have an epoxy-based coating made in a cathodic electro-deposition (CED) process. CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface.

### Technical data

#### Controls:

Frequency converter:                    NONE  
Pressure sensor:                        N

#### Liquid:

Pumped liquid:                        Water  
Liquid temperature range:            -25 .. 120 °C  
Selected liquid temperature:        20 °C  
Density:                                998.2 kg/m³

#### Technical:

Pump speed on which pump data are based:    978 rpm  
Rated flow:                                357.8 m³/h  
Rated head:                                14.33 m  
Actual impeller diameter:                342 mm  
Nominal impeller diameter:               315.2  
Shaft seal arrangement:                Single  
Code for shaft seal:                    BQQE  
Curve tolerance:                        ISO9906:2012 3B  
Bearing design:                        Standard

#### Materials:

Pump housing:                        Cast iron  
EN-GJL-250  
ASTM class 35  
Wear ring:                              Brass  
Impeller:                              Cast iron  
EN-GJL-200  
ASTM class 30  
Internal pump house coating:        CED  
Shaft:                                Stainless steel  
EN 1.4301  
AISI 304

#### Installation:

Max. ambient temperature:            55 °C  
Maximum operating pressure:        10 bar  
Pipe connection standard:            EN 1092-2  
Size of inlet connection:              DN 200  
Size of outlet connection:            DN 150  
Pressure rating for connection:      PN 10



Company name:

Created by:

Phone:

Date:

22/12/2022



Qty.	Description
1	Bearing lubrication: Grease
	Pump housing with feet: Yes
	Support block (Yes/No): Y
	Electrical data:
	Motor type: SIEMENS
	IE Efficiency class: IE3
	Rated power - P2: 18.5 kW
	Mains frequency: 50 Hz
	Rated voltage: 3 x 380-420D/660-725Y V
	Rated current: 37.0/21.5 A
	Starting current: 560-560 %
	Cos phi - power factor: 0.79
	Rated speed: 978 rpm
	Efficiency: IE3 91,7%
	Motor efficiency at full load: 91.7-91.7 %
	Motor efficiency at 3/4 load: 92.5-92.5 %
	Motor efficiency at 1/2 load: 92.4-92.4 %
	Number of poles: 6
	Enclosure class (IEC 34-5): IP55
	Insulation class (IEC 85): F
	Motor No.: 83W15428
	Bearing insulation type N-end: STEEL BEARING
	Others:
	Minimum efficiency index, MEI ≥: 0.70
	Net weight: 463 kg
	Gross weight: 496 kg
	Shipping volume: 0.951 m³
	Danish VVS No.: 386067342
	Country of origin: HU
	Custom tariff no.: 84137051



Company name:  
Created by:  
Phone:

Date: 22/12/2022

## 99001675 NB 150-315.2/342 AASF1AESBQQEPW5 50 Hz

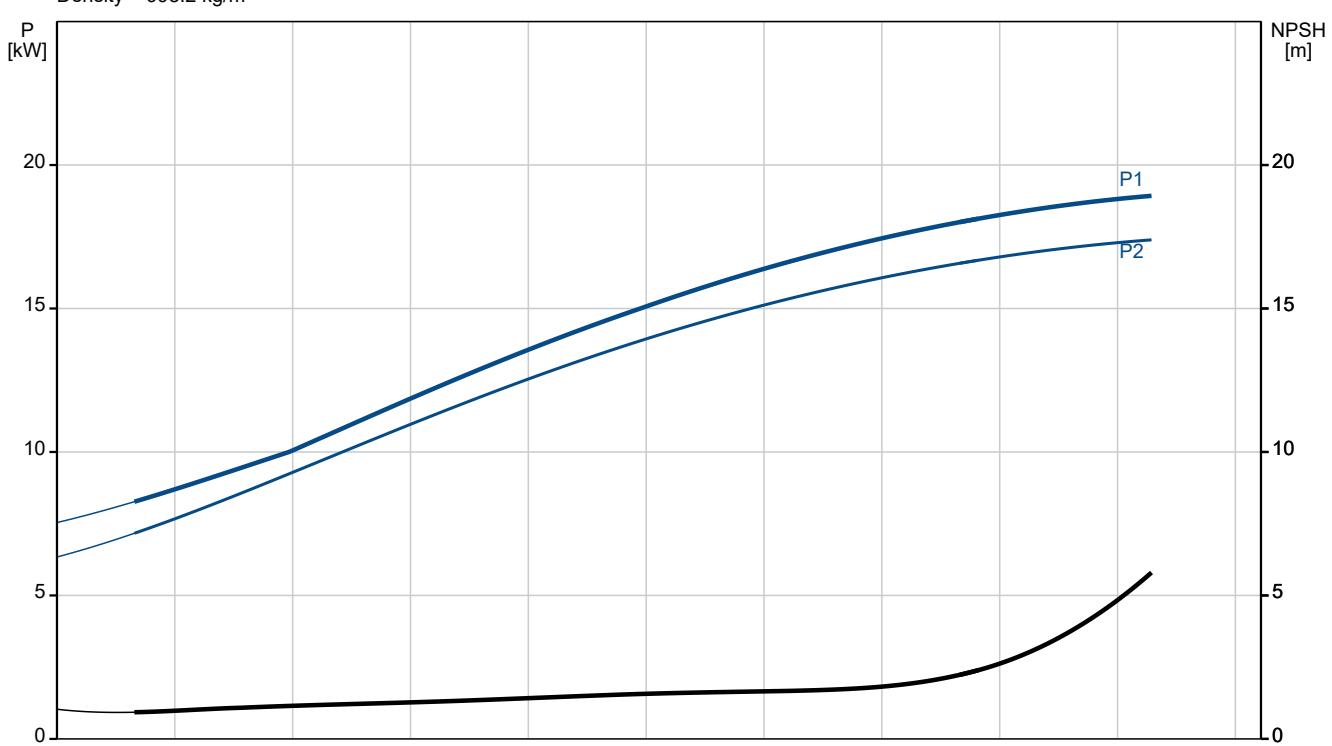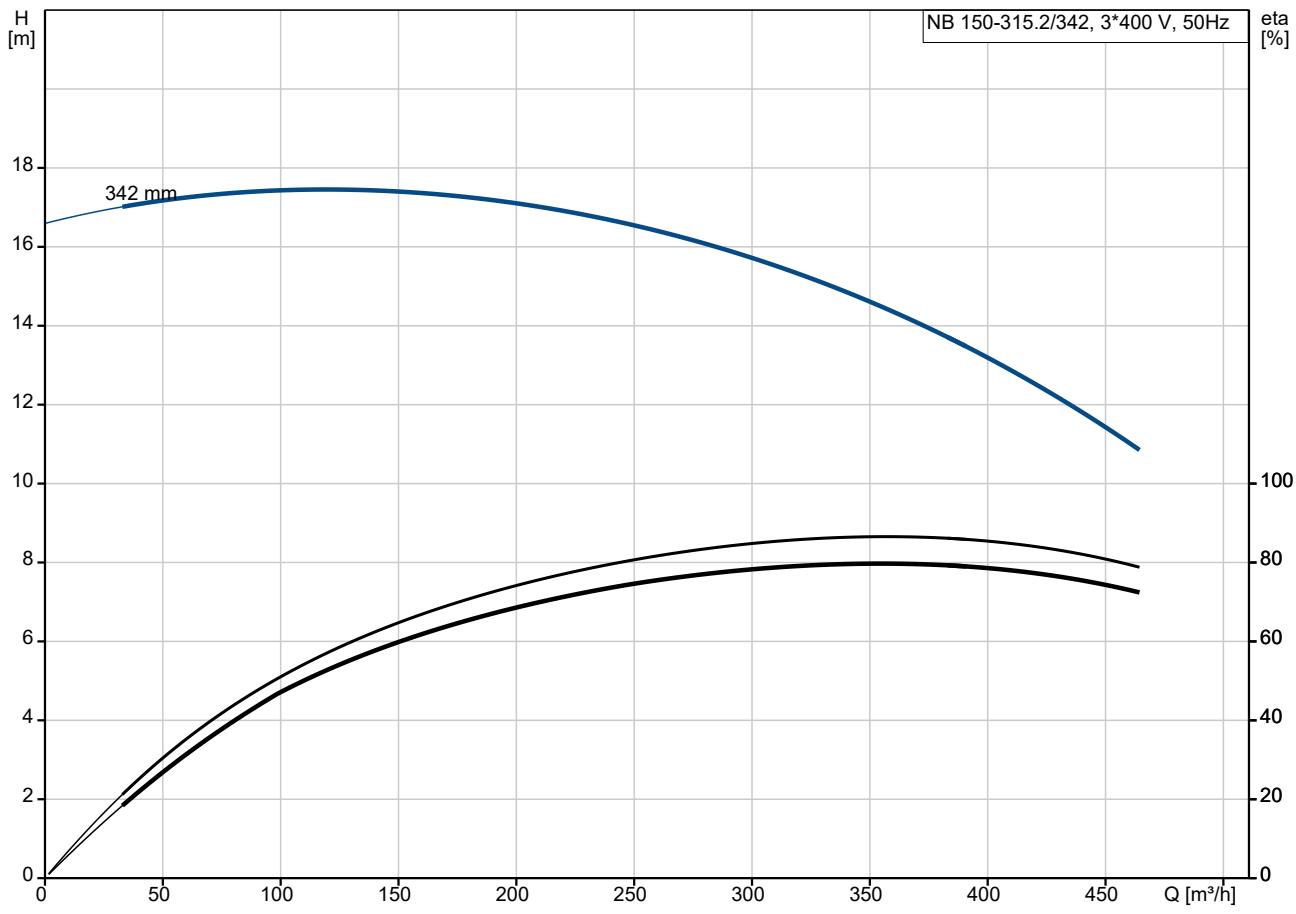







**Company name:**

Created by:

**Phone:**

Date: 22/12/2022

Description	Value
<b>General information:</b>	
Product name:	NB 150-315.2/342
	AASF1AESBQQEPW5
Product No:	99001675
EAN number:	5712604993279
<b>Technical:</b>	
Pump speed on which pump data are based:	978 rpm
Rated flow:	357.8 m <sup>3</sup> /h
Rated head:	14.33 m
Actual impeller diameter:	342 mm
Nominal impeller diameter:	315.2
Shaft seal arrangement:	Single
Shaft diameter:	42 mm
Code for shaft seal:	BQQE
Curve tolerance:	ISO9906:2012 3B
Pump version:	AS
Bearing design:	Standard
<b>Materials:</b>	
Pump housing:	Cast iron
Pump housing:	EN-GJL-250
Pump housing:	ASTM class 35
Wear ring:	Brass
Impeller:	Cast iron
Impeller:	EN-GJL-200
Impeller:	ASTM class 30
Internal pump house coating:	CED
Material code:	A
Code for rubber:	E
Shaft:	Stainless steel
Shaft:	EN 1.4301
Shaft:	AISI 304
<b>Installation:</b>	
Max. ambient temperature:	55 °C
Maximum operating pressure:	10 bar
Pipe connection standard:	EN 1092-2
Size of inlet connection:	DN 200
Size of outlet connection:	DN 150
Pressure rating for connection:	PN 10
Bearing lubrication:	Grease
Pump housing with feet:	Yes
Support block (Yes/No):	Y
Connect code:	F1
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Motor type:	SIEMENS
IE Efficiency class:	IE3
Rated power - P2:	18.5 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-420D/660-725Y V
Rated current:	37.0/21.5 A
Starting current:	560-560 %
Cos phi - power factor:	0.79
Rated speed:	978 rpm
Efficiency:	IE3 91.7%

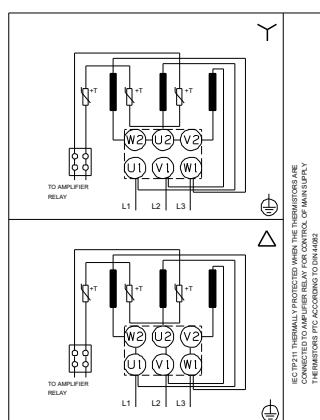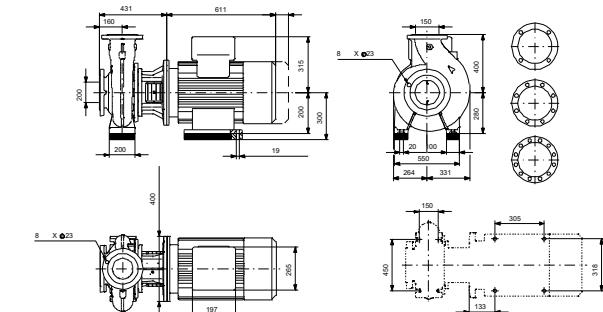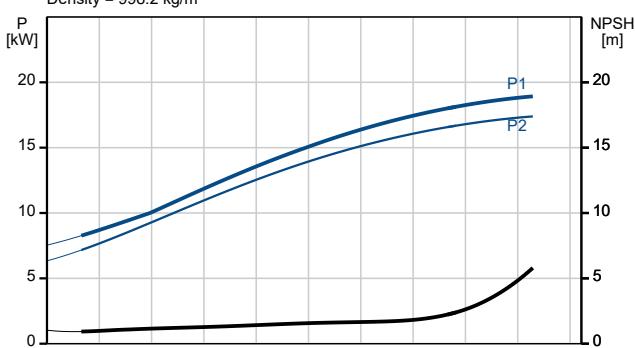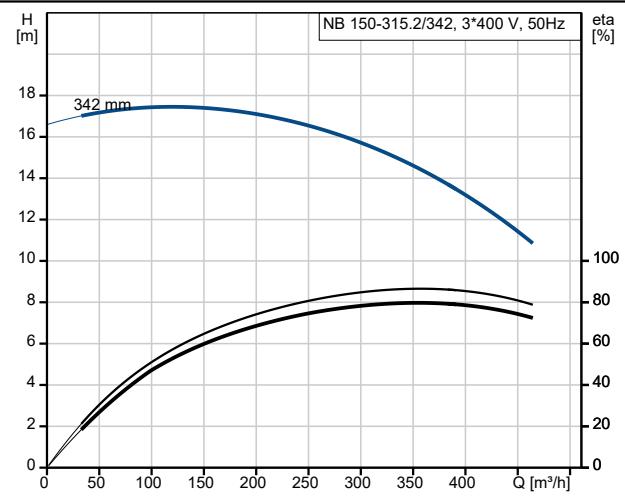



Company name:

Created by:

Phone:

Date:

22/12/2022


Description	Value
Motor efficiency at full load:	91.7-91.7 %
Motor efficiency at 3/4 load:	92.5-92.5 %
Motor efficiency at 1/2 load:	92.4-92.4 %
Number of poles:	6
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Built-in motor protection:	PTC
Motor No.:	83W15428
Mount. design. acc. IEC 34-7:	IM B35
Bearing insulation type N-end:	STEEL BEARING
<b>Controls:</b>	
Frequency converter:	NONE
Pressure sensor:	N
<b>Others:</b>	
Minimum efficiency index, MEI ≥:	0.70
Net weight:	463 kg
Gross weight:	496 kg
Shipping volume:	0.951 m <sup>3</sup>
Danish VVS No.:	386067342
Country of origin:	HU
Custom tariff no.:	84137051



**Company name:**  
**Created by:**  
**Phone:**


**Date:** 22/12/2022

**99001675 NB 150-315.2/342 AASF1AESBQQEPW5 50 Hz**

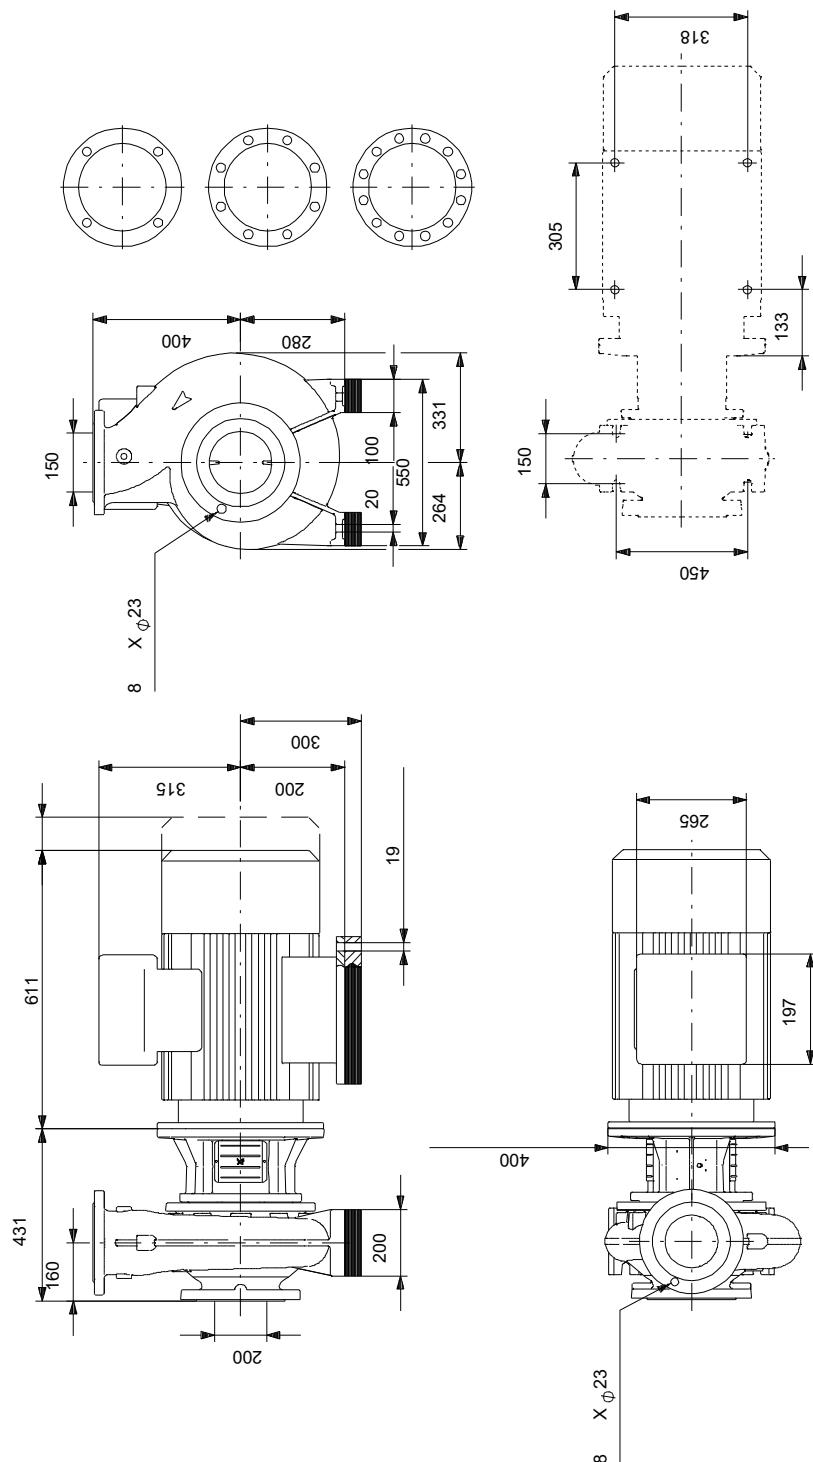

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.

**99001675 NB 150-315.2/342 AASF1AESBQQEPW5 50 Hz**

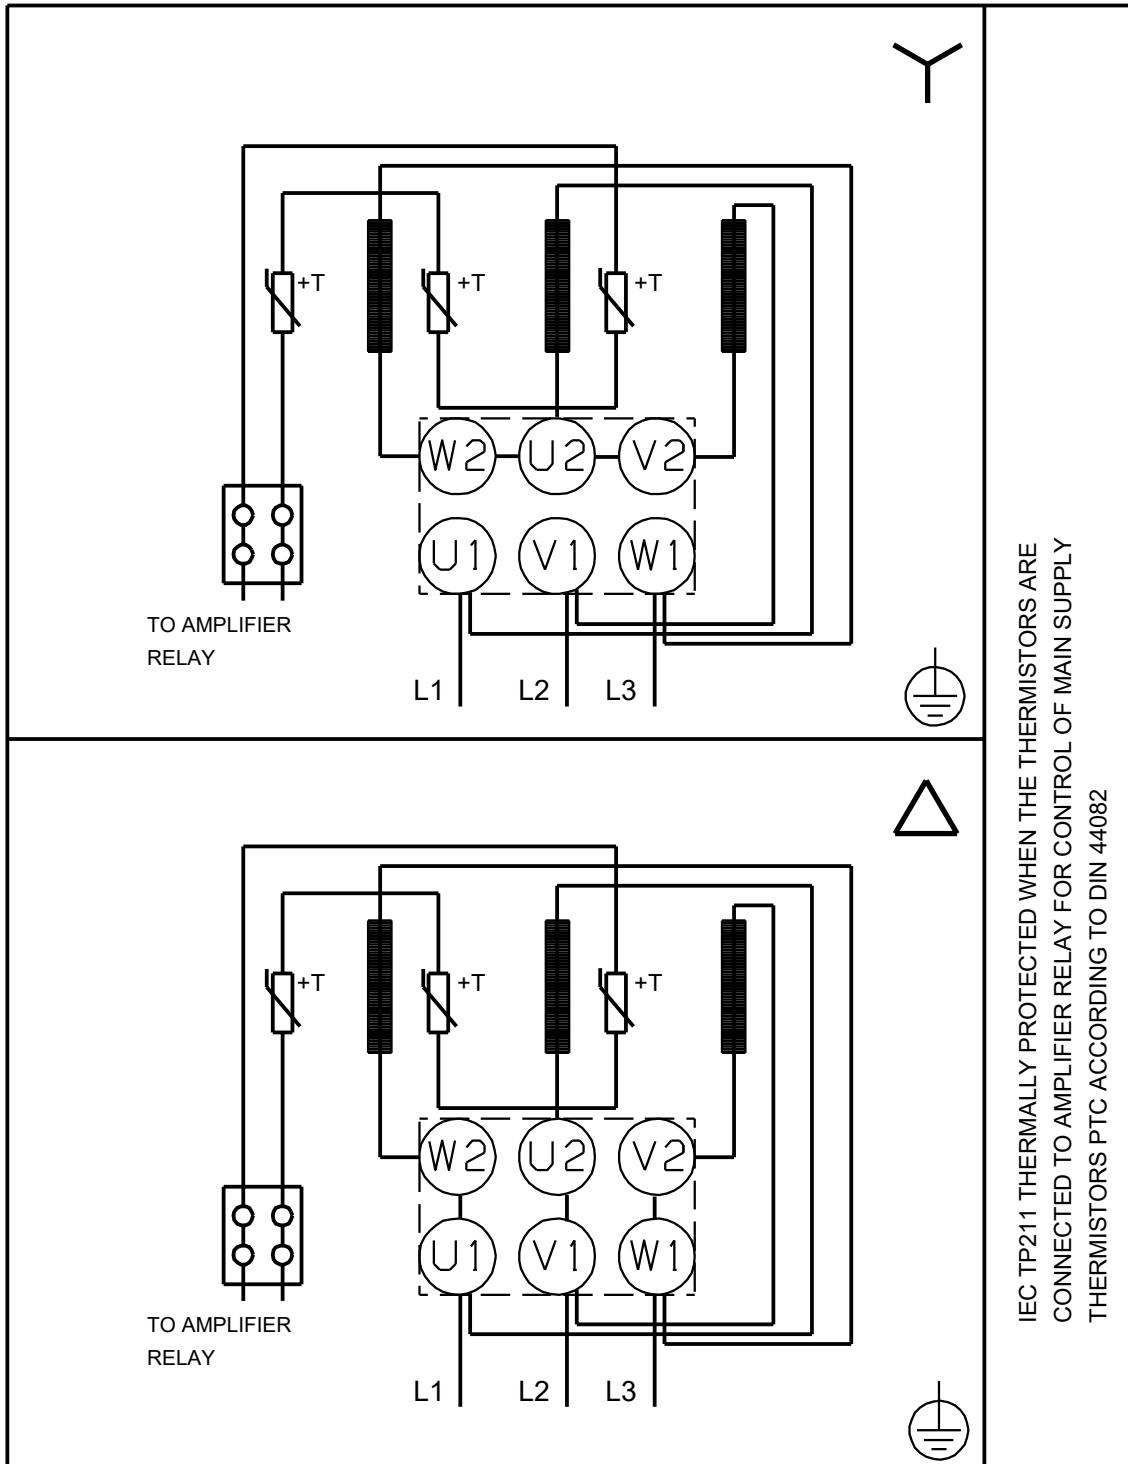

Note! All units are in [mm] unless others are stated.



Company name:  
Created by:  
Phone:

Date: 22/12/2022

**Order Data:**

Position	Your pos.	Product name	Amount	Product No	Total
		NB 150-315.2/342	1	99001675	Price on request