




**CLEGHORN
WARING
FLOJET®**

R4300-530A *DIAPHRAGM PUMP with A.C. INDUCTION motor*

Materials of construction:

Pump head:	Glass-filled Polypropylene
Diaphragm:	Santoprene®
Valves:	EPDM
Motor Frame:	Painted aluminium
Motor Enclosure:	IPX5 standard
Motor Power:	0.09kW

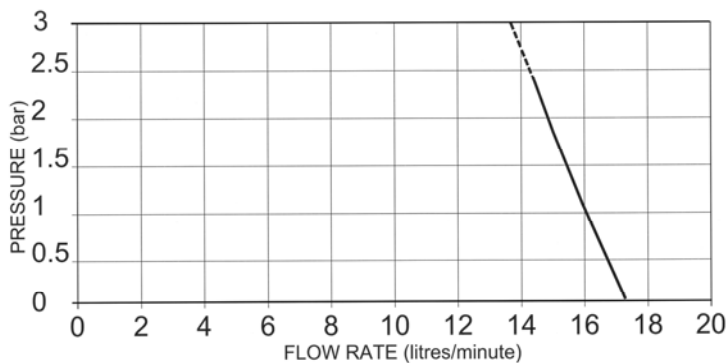

- ◆ Flow rates up to 18 litres/minute (4 gall/min)
- ◆ Pressures switch 2.4 bar (35 psi)
- ◆ Rapid self-priming up to 1.5m
- ◆ For water & light water-based chemicals, diesel & light oils
- ◆ Smooth flow
- ◆ Can run dry without damage
- ◆ Light, compact, portable, tough
- ◆ Liquid temperatures 7°C to 54°C
- ◆ Seal-less design

These diaphragm pumps are AC motorised versions of the versatile and popular low voltage DC diaphragm range.

- ◆ 230v/1/50Hz IPX5 induction motor

