


pumpsalesdirect

Largest online distributor of pumps in the UK

THE SINKMAXX PUMP STATION

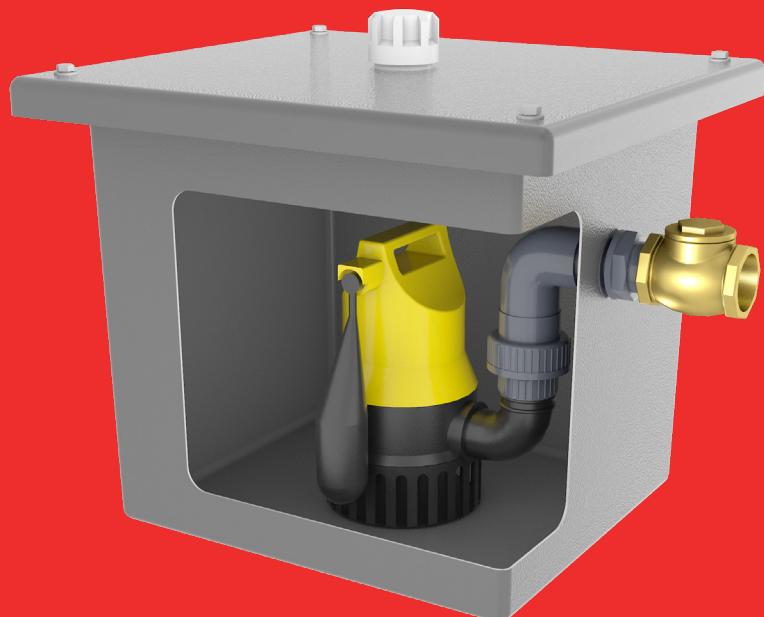

POWERED BY



THE SINKMAXX APPLICATIONS

The SinkMaxx is desinged for a range of applications such as commercial and industrial kitchen installations, as well as:-

- Plantrooms
- Showers
- Washing machines
- Boiler overflow
- Many more

THE SINKMAXX

PRODUCT OVERVIEW

The SinkMaxx is a powerful wastewater pumping solution built for both commercial and industrial applications.

Designed to handle water from sinks, basins, and utility areas, it efficiently collects and discharges wastewater to the drainage system.

Featuring a durable GRP tank that is paired with a reliable submersible pump, the SinkMaxx operates automatically, making it ideal for kitchens, wash stations, and other environments where consistent wastewater removal is essential.



SYSTEM FEATURES

Flexible wastewater handling

Suitable for a wide range of kitchen systems and appliances such as commercial sinks, dishwashers, glasswashers, washing machines, and combi ovens.

High-performance and dependable

The system is designed to manage a range of demanding commercial and industrial waste water applications.

Long-lasting construction

Made from heavy-duty GRP with a sealed and highly secure, easy-to-remove lid for hassle-free servicing.

CONSTRUCTION

The chamber is constructed from durable GRP and comes pre-fitted with all internal pipework and a brass non-return valve as standard.

The chamber lid is secured with hand-tightened screws and rests on a precision moulded rubber seal for a secure fit.

CHAMBER CAPACITY

The chamber volume is 54 litres with a total usable volume of 48 litres.

CHAMBER INLETS

The inlets can be drilled on-site as per requirements. Inlets should be drilled to the side of the tank using the provided tank connector. Minimum inlet height is 200mm.

CHAMBER OUTLET

The system is fitted with a 1 1/4 inch BSP male threaded discharge outlet with NRV.

SYSTEM VENTING


The chamber can be fitted with optional venting, using a tank connector.




PUMP OPTIONS

Model Ref	U3K	U3KS	U5KS
Impeller Type	Vortex	Vortex	Vortex
Power Supply	230 ~ 1ph ~ 50Hz		
Rated Power	0.32kW	0.32kW	0.38kW
Rated Current	1.4A	1.4A	2.3A
Max Head	6.5 meters	6.5 meters	7.5 meters
Max Flow Rate	1.7 l/s	1.7 l/s	3.0 l/s
Cable Length	4 meters	4 meters	4 meters
Free Passage	10mm	10mm	10mm
Pipework Size	1 1/4"	1 1/4"	1 1/4"
Max Temp	40 Degrees	60 Degrees	40 Degrees

PUMP CURVES U3K/U3KS

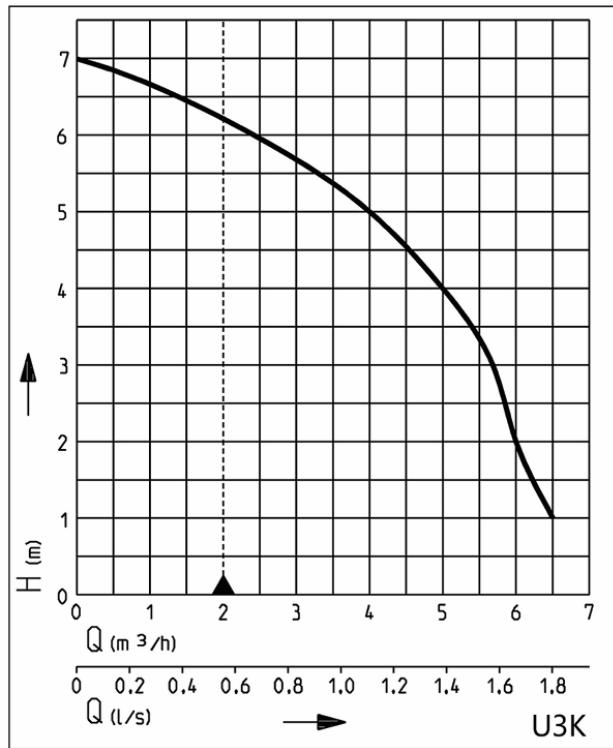

PUMP CURVES U5KS

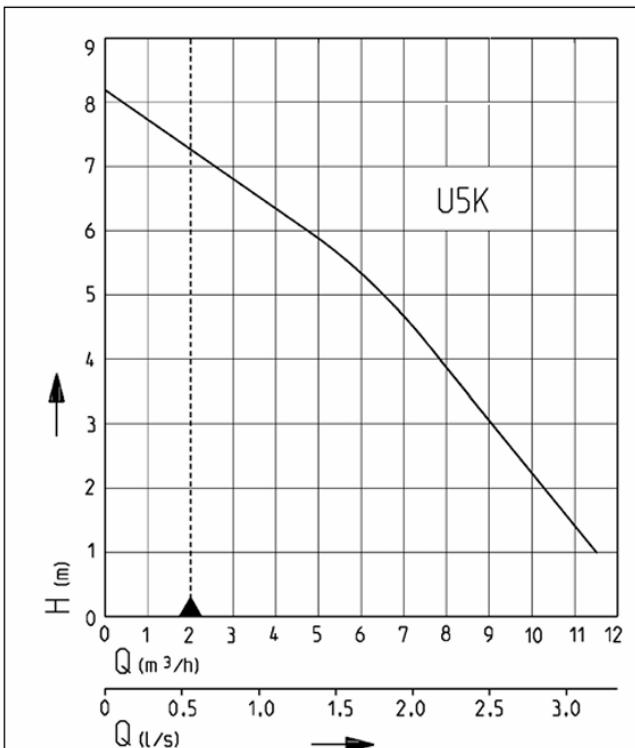


THE SINKMAXX

EXAMPLE INSTALLATION



PRODUCT DRAWINGS

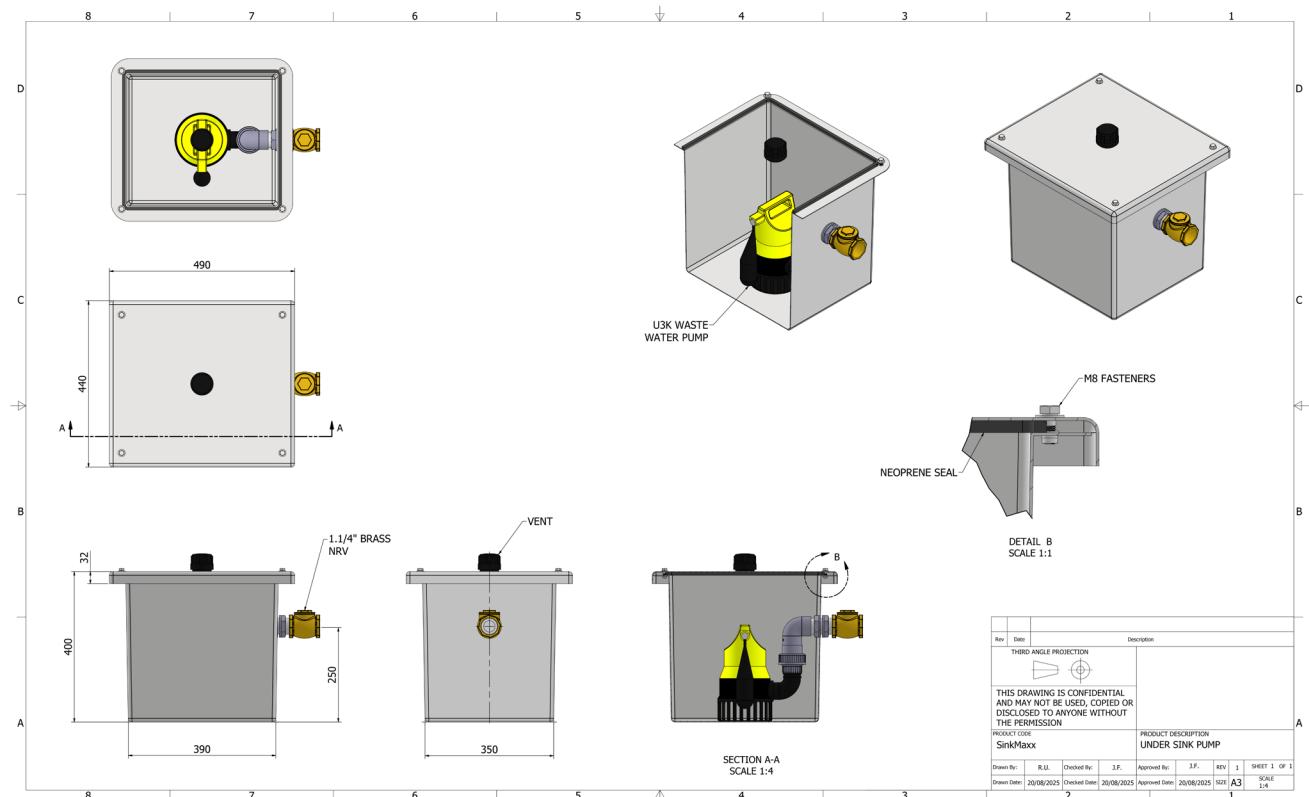

pumpsalesdirect

Largest online distributor of pumps in the UK