

# ABS Coronada light drainage pump 250

Plug-in, stainless steel submersible pump, for the removal of wastewater containing solids up to 10 mm, in accordance with EN 12050-2.



## Application

The Coronada has been designed for fixed or transportable installation, and for internal or external applications such as emptying containers and drainage pits, draining of swimming pools or flooded cellars, and removal of nuisance water from gullies or pedestrian underpasses.

## Construction

- Fully flood-proof, pressure-tight encapsulated unit with stainless steel outer jacket and screen, motor housing, shaft and impeller.
- Coronada SX version is designed for aggressive wastewater and features a high-grade stainless steel shaft, viton seals and PVC cable.
- Coronada KS version is fitted with a KS float switch for automatic level control.
- Single-phase, 50 Hz, 2-pole motor; insulation class F; protection type IP 68. Motor is dynamically balanced with stainless steel shaft. Thermal sensors in the stator switch off the pump in the case of overheating and automatically switch it back on after cooling down.
- The stainless steel rotor shaft is supported in lubricated-for-life ball bearings.
- Shaft sealing is by means of a lip seal (motor side) and mechanical seal (medium side).
- Discharge outlet with internal thread, built-in checkvalve, and detachable multi-stage hose adaptor.
- The medium being pumped flows around the motor housing for optimum heat dissipation. The maximum allowable medium temperature is 50 °C; or up to 60 °C for intermittent usage (max 5 minutes).




## Features

- Corrosion-resistant stainless steel housing and hydraulics.
- Built-in checkvalve in the discharge outlet blocks return-flow from the discharge line when the pump is switched off.
- Ready for immediate use with discharge connection by pipe (threaded) or hose (detachable adaptor).
- KS version with float switch for automatic level control.
- Thermal sensors in motor to protect against overheating.
- Robust, plastic carrying handle.

## Installation

Attention to the backwash level is of vital importance for effective dewatering. All outflow points located below the backwash level must be protected against back flow according to standard EN 12056.

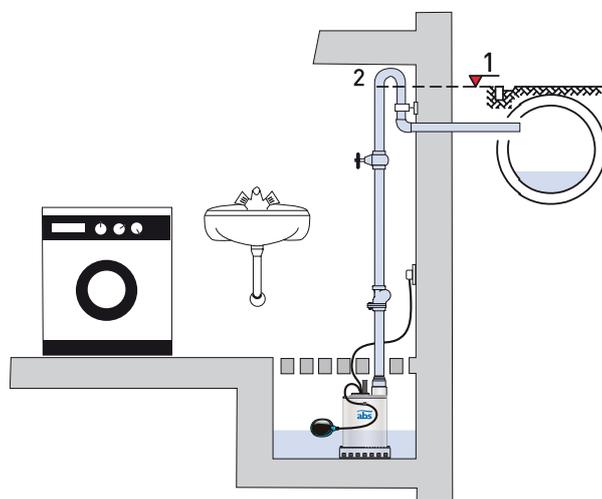

1. Backwash level
2. Backwash loop with base above the backwash level

## Materials

Description	Standard	SX
Pump housing, motor housing, screen and fasteners	Stainless steel 1.4301 (AISI 304)	Stainless steel 1.4401 (AISI 316)
Motor shaft	Stainless steel 1.4305 (AISI 303)	Stainless steel 1.4401 (AISI 316)
Seals	NBR	Viton
Cable	Neoprene	PVC
Impeller, handle	PPO	PPO

The suitability of the materials in the pump for the particular application is the responsibility of the user.


## Technical Data

Coronada	250
Discharge connection	G 1 1/4"
Solids size (mm)	10
Motor power (kW)*	P <sub>1</sub> = 0.50 P <sub>2</sub> = 0.25
Speed (r/min)	2900
Rated voltage (V)	220-240 1~
Rated current (A)	1.80
Cable type (H07RN-F)	3G 1.0
Cable length **	10 m (with Europlug)
Weight (kg)	4.5
Switching levels (mm)	On: 280 Off: 120

\*P<sub>1</sub> = Power taken from mains. P<sub>2</sub> = Power at motor shaft


\*\*For external applications the following VDE regulation applies: Submersible pumps for use externally must have a fixed cable connection with a length of at least 10 m. Regulations vary by country.

## Performance Curve

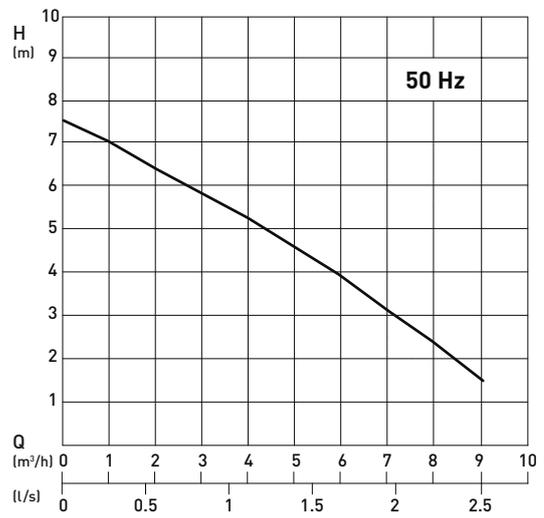


H = Total Head; Q = Discharge Volume Curves to ISO 9906

## Dimensions (mm)

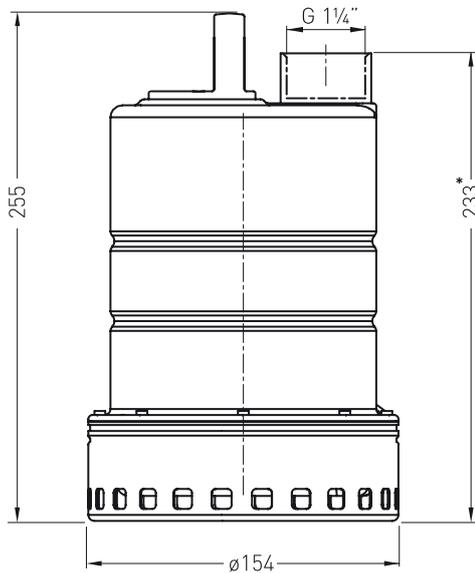

\* With discharge adaptor kit: 310 mm (when replacing Coronada 200)

## Hose Adaptor



## Accessories

Description	Part no.
<b>Discharge Adaptor Kit</b>	62665331
<b>Gate Valve</b> (brass) internal thread G 1 1/4"	14040005
<b>Non-return Valve</b> (synthetic) G 1 1/4" flap valve with internal thread, PA-1-3082	61400511
<b>Non-return Valve</b> (EN-GJL-250) G 1 1/4" ball valve with internal thread	61400525
<b>Discharge Connection Kit</b> 90° elbow (PP) with fixed coupling (brass) R 1 1/4"	61170101
<b>Hexagon Double Nipple</b> (galv.) R 1 1/4"	13770011
<b>Sump Cover</b> (St. 37) with frame and seal	500 x 500 mm 14990051 700 x 700 mm 14990052
<b>Automatic Level Control</b> insertable for single phase	KS-Z10 = 10 m 08410205
AC pumps with DIN plug	KS-Z20 = 20 m 08410206

Description	Part no.
<b>Alarm-contact Float</b> with KS float switch	KS 5 = 5 m 62450016 KS 10 = 10 m 62450017
<b>NC Batteries</b> 9VTR 7-8 for mains-independent operation	12820018
<b>Plug-in Alarm</b> for DIN type socket 230 V Audible alarm with alarm diode, cancel button and potential-free fault output. Supplied with loading unit for mains independent operation.	16020201
<b>Control Unit</b> for double pumping station. Automatic changing of the start sequence, alarm, and potential-free fault indicator.	Contact ABS

