

stuart

Flood Kit

Flood Kit containing a Supersub 250VA submersible pump, a reusable plastic container, 15 m of lay flat hose and hose connector.

The robust plastic mesh container can be used as a filter, protecting the pump from debris.

Suitable for clean and grey water.



Features

- Compact and self contained
- Easy to use
- Lay flat space saving hose
- Robust mesh container
- 10 m power lead
- IPX8 rated Submersible pump
- Manual and automatic float switch operation


Application

- A convenient and easy to use solution to pumping out flooded areas such as basements

Flow with 15 m hose attached	
Zero head (hose laid flat)	83 l/min
2.0 m head	80 l/min

stuart

Pump Model		Flood Kit 46638
General	Guarantee	1 year
Features	Pump type	Submersible
	Seal	Double Lip
	Flat hose	15 metres
	Automatic float switch	✓
Performance	Maximum head (closed valve)	0.8 bar
	Maximum flow with 15 m hose	83 l/min @ zero head (hose laid flat), 80 l/min @ 2.0 m head
	Maximum immersion depth	7 metres
	Minimum immersion depth	Submerged
	Min / Max water temperature	Min 4 °C / Max 35 °C
Connections	Pump connections	G 1½ female
Flat hose	Hose Connector	G 1½ female x G 1 male x 25 or 32 mm bore hose
	Flat hose	32 mm lay flat x 15 metres long
Motor	Type	Induction, auto-reset thermal trip
	Duty rating	Continuous
Electrical	Power supply / phase / frequency	230 V a.c. / 1 / 50 Hz
	Current (full load)	2.2 Amps
	Power consumption	508 Watts
	Fuse rating	13 Amps
	Power cable (pre-wired)	10 metres
Physical	Enclosure protection	IPX8
	Length	410 mm
	Width	300 mm
	Height (excluding hoses)	340 mm
	Weight (including fittings)	9.2 Kg

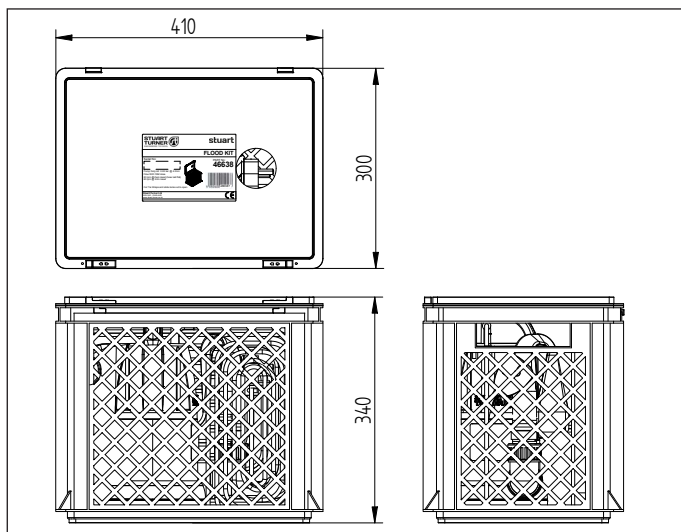

Stuart Turner Limited reserves the right to amend specifications without notice.