JABSCO

UTILITY PUMPS

a xylem brand

80-size

UTILITY PUMP with 1½" ports & AC electric motor

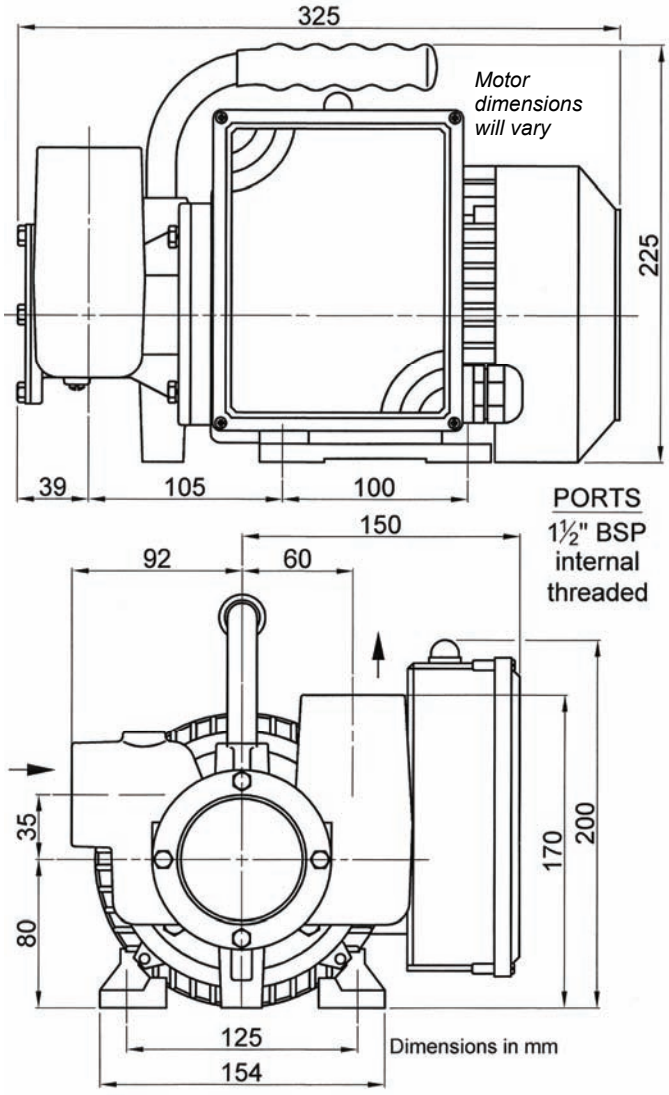

PUMP MODELS

53081-2003-230	*230 volt 1 phase 50 Hz (Continuous rated motor)*
53080-2003	*230 volt 1 phase 50 Hz (40 minute rated motor)*
53081-2003-110	*110 volt 1 phase 50 Hz (Continuous rated motor)*
53081-2003-400	*400 volt 3 phase 50 Hz (No handle)*

- ✦ Nitrile oil-resistant impeller fitted as standard.
- ✦ Neoprene impeller version available.

Also available: reduced flow versions for liquid viscosity up to 1000cp, and "Blackwater" versions for toilet waste discharge from boats. Check with your pump supplier.

SPECIFICATION

Pump body: bronze *Weight*: 17kg
Shaft: AISI316 stainless steel
Shaft seal: mechanical (carbon-ceramic)
Impeller: see pump models above
Max. recommended liquid viscosity: 150cp. Check with your pump supplier if in doubt.
Motor: 0.55kw, 1400rpm, totally enclosed, fan ventilated, IP55 enclosure. Single-phase motors fitted with manual reset thermal overload cut-out.

- ✦ Rapid self-priming up to 3 metres vertical lift.
- ✦ Handles hard and soft solids up to 8mm in size.
- ✦ Can pump up to 90% entrained air.
- ✦ Up to 30 minutes dry running protection.
- ✦ Quick and simple to maintain
- ✦ Light, compact, portable and tough

PUMP PERFORMANCE

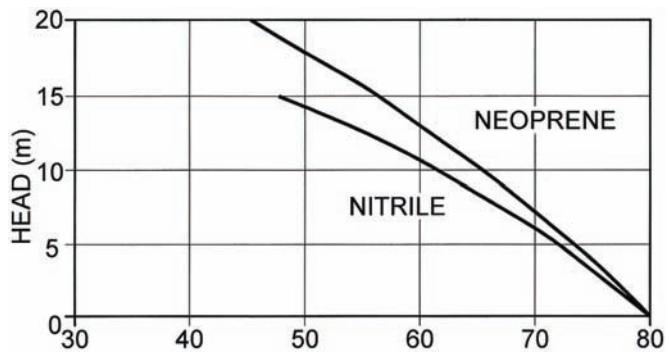

WARNING
Explosive hazard. Do not pump gasoline, solvents, thinners or other flammable liquids. To do so can cause an explosion resulting in injury or death

Performance figures are based on manufacturer's tests with water and are not guaranteed for any particular application

Product descriptions and specifications are subject to alteration without notice

xylem
Let's Solve Water