

SELF PRIMING CONTRACTOR PUMPS

ELECTRIC DRIVEN CAST IRON SELF PRIMING PUMPS

B


Self priming electric pump with multi blade impeller, suitable for pumping clean or slightly dirty water. Not suitable for pumping abrasives. A non-return valve is fitted on the inlet of the pump body to avoid the loss of water after the pump has stopped, making it easier to prime when the pump starts again. Maximum suction depth of 6 metres and a maximum liquid temperature of 60°C. Pump casing, inlet flange and impeller are made from cast iron. Stainless steel shaft. Carbon mechanical seal. High pressure versions are available upon request. Models 4 Kw and above now come on a skid plate.

Features

Centrifugal
Self Priming
Cast Iron

Applications

Drainage

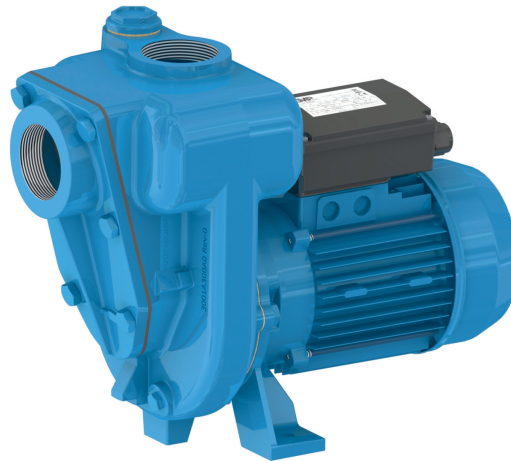

B2KQA shown in frame and isolator



B2KQA shown on sack trolley with isolator

| MODEL | VOLTAGE | INLET/OUTLET | LM/HM | Kw | AMP | SOLIDS | H x W x L mm | Kg | CODE | PRICE |
|----------------|---------|--------------|---------|------|------|--------|------------------|-----|-------------|-------|
| B1½KQA EAV5 | 230v | 1½" x 1½" | 290/16 | 0.75 | 6.2 | 8mm | 285 x 185 x 375 | 21 | 070-110 | |
| B2KQA 2757 | 230v | 2" x 2" | 390/16 | 1.1 | 7 | 12mm | 300 x 185 x 410 | 22 | 070-112 | |
| B2KQA EA3C | 110v | 2" x 2" | 390/16 | 1.5 | 19 | 14mm | 300 x 185 x 410 | 22 | 070-114 | |
| B2KQA EA3C FR | 110v | 2" x 2" | 390/16 | 1.5 | 19 | 14mm | 385 x 430 x 550 | 28 | 070-114 FR | |
| B2KQA EA3C SAC | 110v | 2" x 2" | 390/16 | 1.5 | 19 | 14mm | 1300 x 555 x 470 | 32 | 070-114 SAC | |
| B3KQA 1780 | 230v | 3" x 3" | 850/15 | 2.2 | 13 | 27mm | 300 x 185 x 445 | 32 | 070-116 | |
| B1½KQA EA5Z | 400v | 1½" x 1½" | 290/16 | 0.75 | 1.9 | 8mm | 285 x 185 x 375 | 21 | 070-120 | |
| B2KQA 2761 | 400v | 2" x 2" | 450/18 | 1.5 | 2.6 | 12mm | 300 x 185 x 410 | 24 | 070-122 | |
| B3KQA 1226 | 400v | 3" x 3" | 850/15 | 2.2 | 5 | 27mm | 300 x 185 x 445 | 32 | 070-124 | |
| B4KQA EAFE | 400v | 4" x 4" | 1650/15 | 4 | 7.8 | 35mm | 400 x 315 x 670 | 84 | 070-125 | |
| B3XR/A EADM | 400v | 3" x 3" | 1400/26 | 5.5 | 11 | 24mm | 405 x 280 x 650 | 96 | 070-126 | |
| B3XR/A EAHA | 400v | 3" x 3" | 1450/30 | 7.5 | 14.3 | 24mm | 405 x 280 x 650 | 104 | 070-128 | |
| B4XR/A EAFN | 400v | 4" x 4" | 2250/30 | 15 | 26.5 | 39mm | 455 x 365 x 800 | 228 | 070-130 | |

SELF PRIMING CONTRACTOR PUMPS

ELECTRIC DRIVEN CAST IRON SELF PRIMING PUMPS

