
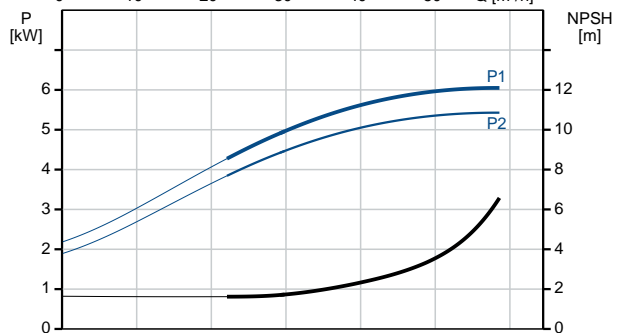
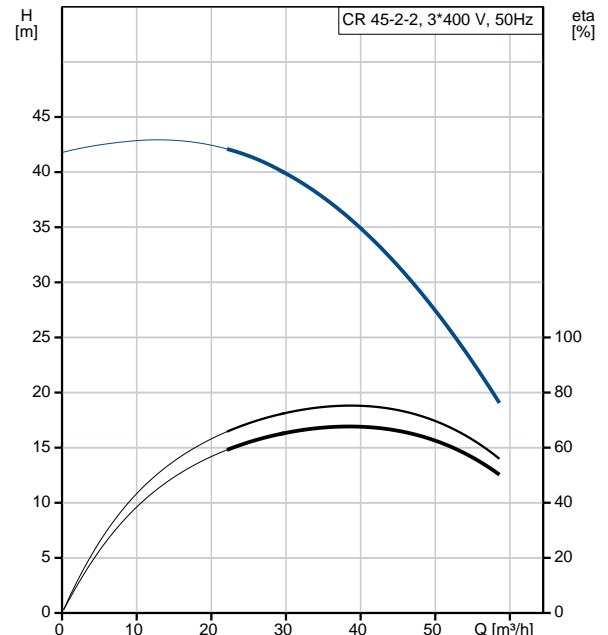


Qty.	Description
1	<p data-bbox="199 338 491 367">CR 45-2-2A-F-A-V-HQQV</p> <div data-bbox="363 405 456 848" style="text-align: center;">  </div> <p data-bbox="592 846 1075 873" style="text-align: center;">Note! Product picture may differ from actual product</p> <p data-bbox="199 880 467 907">Product No.: 96122823</p> <p data-bbox="199 938 1455 1041">Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). The pump head and base are in cast iron – all other wetted parts are in stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via DIN flanges.</p> <p data-bbox="199 1081 935 1108">The pump is fitted with a 3-phase, fan-cooled asynchronous motor.</p> <p data-bbox="199 1140 316 1167">Controls:</p> <p data-bbox="199 1169 638 1196">Frequency converter: NONE</p> <p data-bbox="199 1229 287 1256">Liquid:</p> <p data-bbox="199 1258 635 1285">Pumped liquid: Water</p> <p data-bbox="199 1288 692 1314">Liquid temperature range: -20 .. 90 °C</p> <p data-bbox="199 1317 630 1344">Selected liquid temperature: 20 °C</p> <p data-bbox="199 1346 777 1373">Density at selected liquid temperature: 998.2 kg/m³</p> <p data-bbox="199 1406 327 1433">Technical:</p> <p data-bbox="199 1435 820 1462">Pump speed on which pump data are based: 2919 rpm</p> <p data-bbox="199 1464 651 1491">Rated flow: 45 m³/h</p> <p data-bbox="199 1494 644 1520">Rated head: 30.6 m</p> <p data-bbox="199 1523 651 1550">Pump orientation: Vertical</p> <p data-bbox="199 1552 635 1579">Shaft seal arrangement: Single</p> <p data-bbox="199 1581 639 1608">Code for shaft seal: HQQV</p> <p data-bbox="199 1610 667 1637">Approvals on nameplate: CE, EAC</p> <p data-bbox="199 1639 764 1666">Curve tolerance: ISO9906:2012 3B</p> <p data-bbox="199 1702 320 1729">Materials:</p> <p data-bbox="199 1731 831 1821">Base: Cast iron EN 1563 EN-GJS-500-7 ASTM A536 80-55-06</p> <p data-bbox="199 1823 727 1912">Impeller: Stainless steel EN 1.4301 AISI 304</p> <p data-bbox="199 1915 649 1973">Bearing: SIC Support bearing: Graflon</p> <p data-bbox="199 2002 344 2029">Installation:</p> <p data-bbox="199 2031 630 2058">Maximum ambient temperature: 60 °C</p> <p data-bbox="199 2060 638 2087">Maximum operating pressure: 16 bar</p>

Qty.	Description
	<p>Max pressure at stated temp: 16 bar / 90 °C 16 bar / -20 °C</p> <p>Type of connection: DIN Size of inlet connection: DN 80 Size of outlet connection: DN 80 Pressure rating for pipe connection: PN 40 Flange size for motor: FF265</p> <p>Electrical data:</p> <p>Motor standard: IEC Motor type: 132SC IE Efficiency class: IE3 Rated power - P2: 5.5 kW Power (P2) required by pump: 5.5 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-415D V Rated current: 11 A Starting current: 1080-1180 % Cos phi - power factor: 0.87-0.82 Rated speed: 2920-2940 rpm Efficiency: IE3 89,2% Motor efficiency at full load: 89.2 % Motor efficiency at 3/4 load: 90.0 % Motor efficiency at 1/2 load: 89.6 % Number of poles: 2 Enclosure class (IEC 34-5): 55 Dust/Jetting Insulation class (IEC 85): F Motor No: 85U17417</p> <p>Others:</p> <p>Minimum efficiency index, MEI $\hat{\alpha}\%$: 0.70 Net weight: 104 kg Gross weight: 127 kg Shipping volume: 0.309 m³ Country of origin: GB Custom tariff no.: 84137075</p>

Description	Value
General information:	
Product name:	CR 45-2-2A-F-A-V-HQQV
Product No:	96122823
EAN number:	5700396688671
Technical:	
Pump speed on which pump data are based:	2919 rpm
Rated flow:	45 m ³ /h
Rated head:	30.6 m
Head max:	41.4 m
Stages:	2
Impellers:	2
Number of reduced-diameter impellers:	2
Low NPSH:	N
Pump orientation:	Vertical
Shaft seal arrangement:	Single
Code for shaft seal:	HQQV
Approvals on nameplate:	CE, EAC
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	B
Materials:	
Base:	Cast iron EN 1563 EN-GJS-500-7
Impeller:	ASTM A536 80-55-06 Stainless steel EN 1.4301 AISI 304
Material code:	A
Code for rubber:	V
Bearing:	SIC
Support bearing:	Graflon
Installation:	
Maximum ambient temperature:	60 °C
Maximum operating pressure:	16 bar
Max pressure at stated temp:	16 bar / 90 °C 16 bar / -20 °C
Type of connection:	DIN
Size of inlet connection:	DN 80
Size of outlet connection:	DN 80
Pressure rating for pipe connection:	PN 40
Flange size for motor:	FF265
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-20 .. 90 °C
Selected liquid temperature:	20 °C
Density at selected liquid temperature:	998.2 kg/m ³
Electrical data:	
Motor standard:	IEC
Motor type:	132SC
IE Efficiency class:	IE3
Rated power - P2:	5.5 kW
Power (P2) required by pump:	5.5 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-415D V
Rated current:	11 A





Company name:

Created by:

Phone:

Date: 08/05/2019

Description	Value
Starting current:	1080-1180 %
Cos phi - power factor:	0.87-0.82
Rated speed:	2920-2940 rpm
Efficiency:	IE3 89,2%
Motor efficiency at full load:	89.2 %
Motor efficiency at 3/4 load:	90.0 %
Motor efficiency at 1/2 load:	89.6 %
Number of poles:	2
Enclosure class (IEC 34-5):	55 Dust/Jetting
Insulation class (IEC 85):	F
Motor protec:	PTC
Motor No:	85U17417
Controls:	
Frequency converter:	NONE
Others:	
Minimum efficiency index, MEI %:	0.70
Net weight:	104 kg
Gross weight:	127 kg
Shipping volume:	0.309 m ³
Country of origin:	GB
Custom tariff no.:	84137075