

Qty. Description

1 DPI--0-1.6b/1/ G/D.900-B/V-5/-B/02B/SD-1



Note! Product picture may differ from actual product

Product No.: [96611524](#)

The transmitter is made of 1.4404 stainless steel.

Liquid:

Liquid temperature range: -10 .. 70 °C

Technical:

Approvals: EAC

Pressure differential functionality = Yes/No: Y

Pressure relative functionality (Yes/No): N

Flow functionality (Yes/No): N

Temperature functionality (Yes/No): N

Minimum measuring pressure: 0 bar

Maximum measuring pressure: 1.6 bar

Installation:

Range of ambient temperature: -40 .. 70 °C

Electrical data:

Enclosure class (IEC 34-5): IP55

Length of cable: 0.9 m

Minimum rated voltage dc: 12.00 V

Maximum rated voltage dc: 30.00 V


Others:

Danish VVS No.: 475273016


Swedish RSK No.: 6010203

Finnish LVI No.: 4534504

Description	Value
General information:	
Product name:	DPI--0-1.6b/1/ G/D.900-B/V-5/-B/02B/SD-1
Product No:	96611524
EAN number:	5700834481550
Technical:	
Approvals:	EAC
Pressure differential functionality = Yes/No:	Y
Pressure relative functionality (Yes/No):	N
Flow functionality (Yes/No):	N
Temperature functionality (Yes/No):	N
Minimum measuring pressure:	0 bar
Maximum measuring pressure:	1.6 bar
Installation:	
Range of ambient temperature:	-40 .. 70 °C
Liquid:	
Liquid temperature range:	-10 .. 70 °C
Electrical data:	
Enclosure class (IEC 34-5):	IP55
Length of cable:	0.9 m
Minimum rated voltage dc:	12.00 V
Maximum rated voltage dc:	30.00 V
Others:	
Danish VVS No.:	475273016
Swedish RSK No.:	6010203
Finnish LVI No.:	4534504

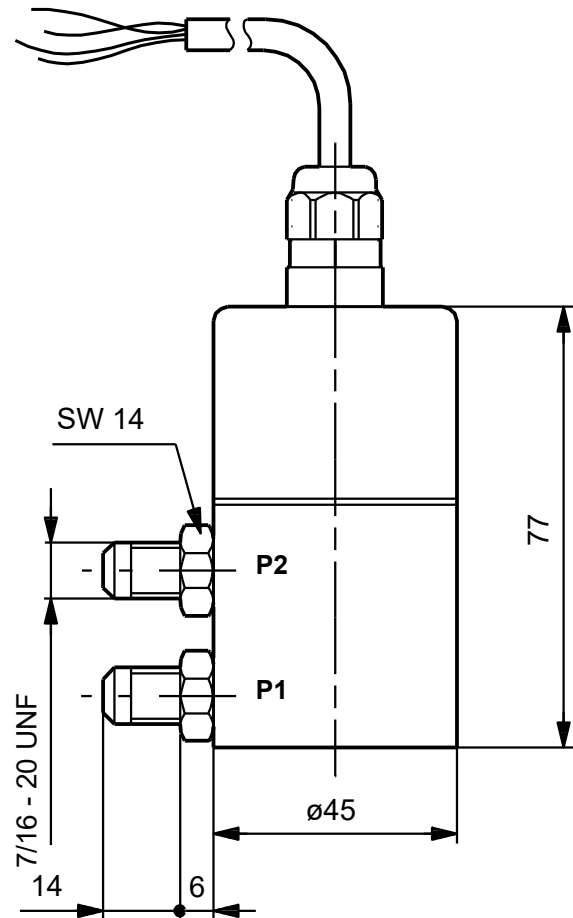

96611524 DPI/--0-1.6b/1/ G/D.900-B/V-5/-B/02B/SD-1

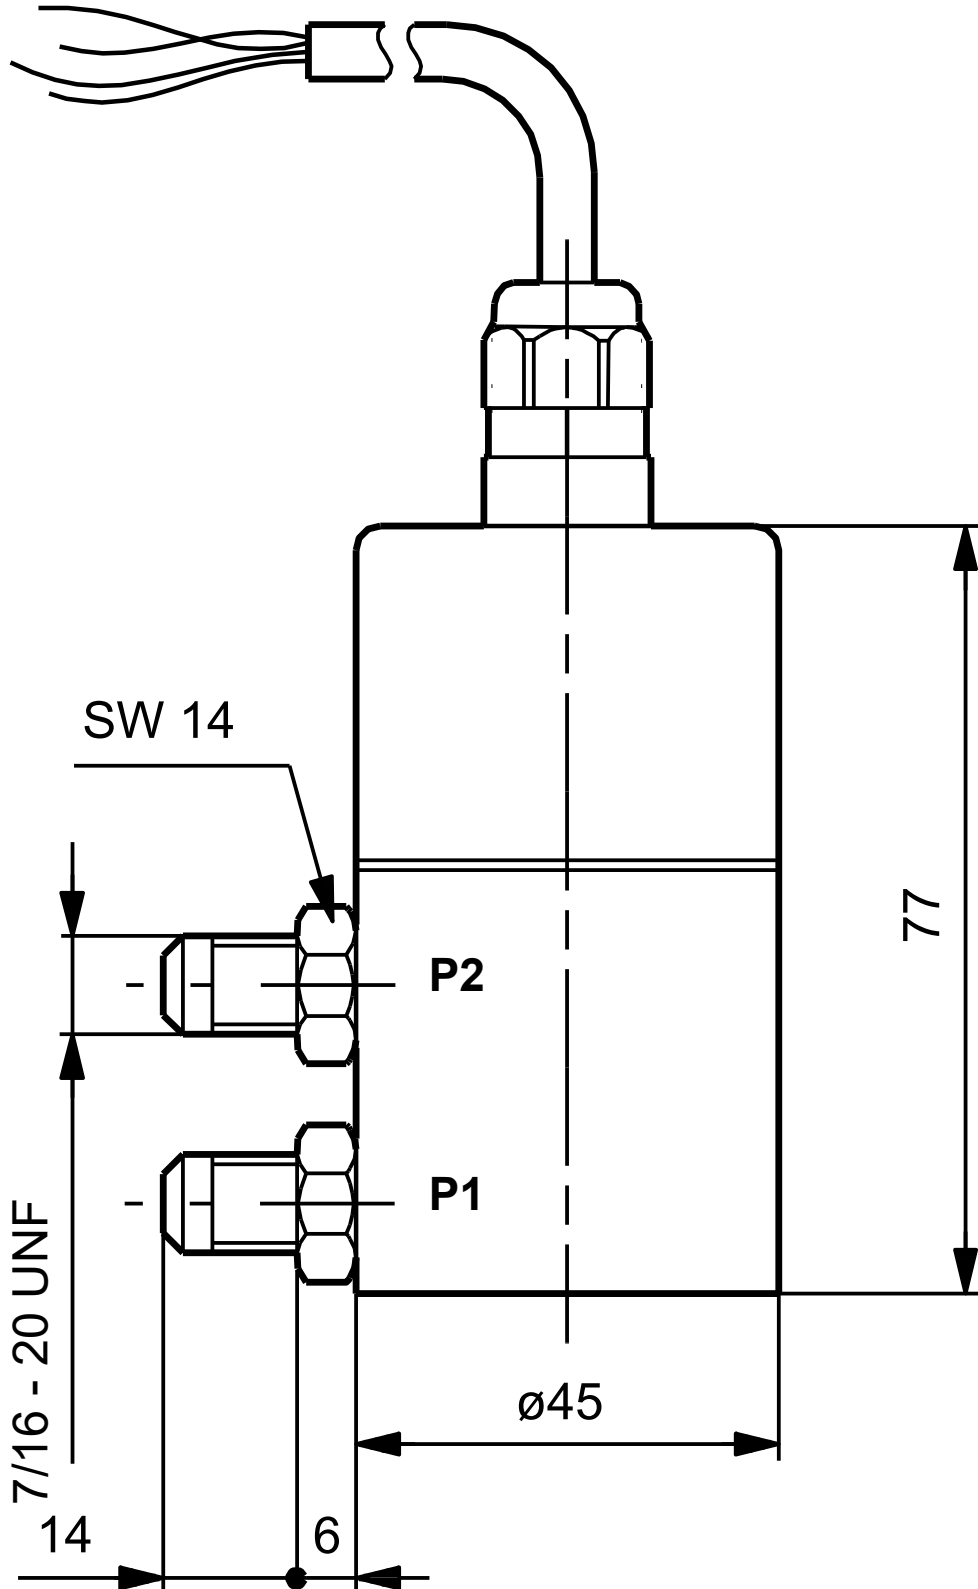

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

